

2025
PRODUCT CATALOG



YEARS

A photograph of two soldiers in full tactical gear, including helmets and night vision devices. They are holding rifles with Eotech sights mounted on them. The scene is dark, suggesting a night operation. The text 'BATTLE PROVEN FOR' is overlaid in white, and 'THIRTY YEARS' is overlaid in large, bold, tan letters.

BATTLE PROVEN FOR

**THIRTY
YEARS**



 EOTECH.

HWS®

HOLOGRAPHIC WEAPON SIGHTS

EFLX®

MINI REFLEX SIGHTS

VUDU®

PRECISION RIFLESOPES

NV+IR

NIGHT VISION AND INFRARED

INDEX

★ = NEW FOR 2025

04 HOLOGRAPHIC WEAPON SIGHTS

- 05 Features + Advantages
- 08 What HWS® is right for me?
- 10 EXPS Series // EXPS3 / EXPS2
- 12 XPS Series // XPS3 / XPS2
- 14 5 Series // 512 / 552 / 518 / 558
- 16 HWS® Reticle Patterns

18 MAGNIFIERS

- 19 Features + Advantages
- 20 G Series // G45 / G43 / G33

22 HOLOGRAPHIC HYBRID SIGHTS

- 23 Features
- 24 HHS® Series // HHS GRN / HHS II / HHS VI / HHS I STC / HHS V

30 MINI REFLEX SIGHTS

- 31 EFLX®

32 VUDU® PRECISION RIFLESOPES

- 33 Features + Advantages
- 35 What Vudu® is right for me?
- ★ 36 NEW // 3-9x32
- 38 First Focal Plane (FFP) // 1-10x28 / 1-6x24 / 3.5-18x50 / 5-25x50

- 44 Second Focal Plane (SFP) // 1-8x24 / 3.5-18x50 / 8-32x50
- 46 Vudu® Reticle Patterns

48 VUDU X™ RIFLESOPES

- 49 Second Focal Plane (SFP) // 1-6x24 / 2-12x40 + Vudu X™ Reticle Patterns

50 NIGHT VISION + INFRARED

- 51 OGL® // On-Gun Laser
- 52 Night Vision // MonoNV / BinoNV-W / ClipNV
- 55 Infrared // MK2 ClipIR-LR

56 PRODUCT INDEXES

- 56 HWS®
- 57 Magnifier / HHS®
- 58 Mini Reflex Sight
- 59 Vudu®
- 59 Vudu X™


HWS[®]



HOLOGRAPHIC WEAPON SIGHT

EOTECH[®] Holographic Weapon Sights (HWS[®]) offer the fastest target acquisition available, with a heads-up display for two-eyes-open engagement and enhanced situational awareness. Even if the sight window is shattered or obstructed, it continues to perform. EOTECH's rigorous testing for shock, recoil, submersion, and thermal drift ensures unmatched reliability and quality you can trust.

FEATURES

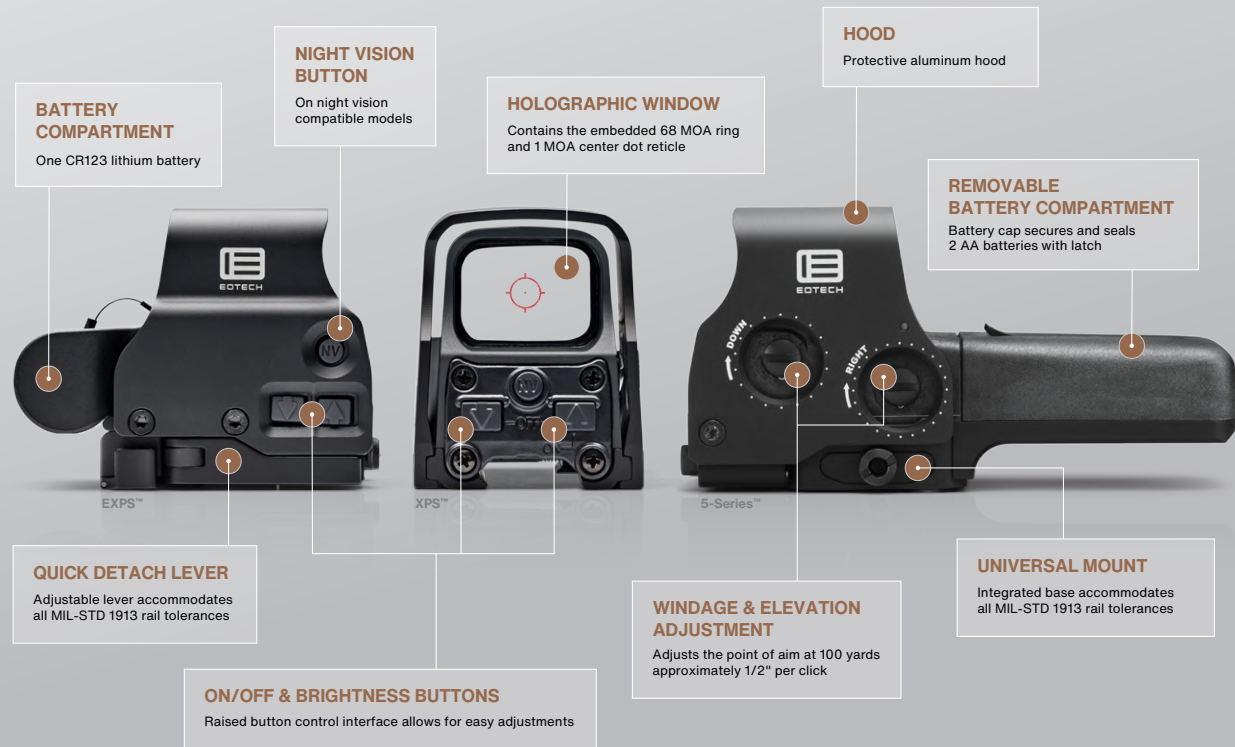

ADVANTAGES



GENUINE HOLOGRAPHY

HWS* uses holographic technology to deliver a crystal-clear view of both the reticle and target at the same time, unlike traditional red dots. Shooters maintain focus on both without needing to shift back and forth resulting in faster, more intuitive aiming, enhancing target acquisition in any situation.



NEVER OUT OF THE FIGHT

Even when the sight window is partially shattered or obscured by snow or mud, the HWS* will keep functioning and delivering pinpoint accuracy unlike red dots. One of the many reasons they're trusted by America's elite in the most extreme, hostile environments in the world.



MAINTAIN PRECISION

Due to holography, the HWS's 1 MOA aiming dot is maintained even when using a 3X or 5X magnifier. This ensures a sharp, pinpoint dot on a target that appears 3 or 5 times larger, enhancing accuracy at greater distances.



RETICLES FOR ALL PLATFORMS

The renowned "speed ring" reticle combines a large ring with a 1 MOA aiming dot, enabling significantly faster target acquisition compared to a single dot. EOTECH* also provides various other reticle patterns, including options with multiple trajectory points and range-assist features for added versatility.

FIELD-OF-VIEW

IMPROVED SITUATIONAL AWARENESS


The HWS's wide rectangular window expands— not inhibits —peripheral vision. The HWS* encourages shooters to keep both eyes open, increasing speed-to-target acquisition and enhanced situational awareness thanks to the enlarged field-of-view.



RETICLE

FASTER TARGET ACQUISITION

The "Speed Ring" reticle on the HWS* platform is one of the fastest for target acquisition worldwide. Its large ring naturally guides the eye to the center aiming dot for quicker aiming, while also offering built-in ranging features with holdover points for added precision.



WHAT HWS® IS RIGHT FOR ME?



Night Vision Compatibility

Seamless integration with night vision equipment offering 10 additional brightness settings.



Button Placement

SIDE PLACEMENT

Ideal for brightness adjustments when coupled with EOTECH® magnifier.

BACK PLACEMENT

Allows for quick adjustments without taking your eyes off the target.



Battery Type

(2) AA BATTERIES

Readily available and provides increased battery life.

SINGLE CR123

More compact, requiring less rail space.



Rail Attachment

QUICK-DETACH (QD)

Adjustable, locking throw lever for immediate attachment or removal and offers lower 1/3 co-witness.

CROSS BOLT (CB)

7/64 hex head cross-bolt attachment that offers absolute co-witness height.



NIGHT VISION



BATTERY




BUTTONS



RAIL ATTACHMENT



COLOR & RETICLE

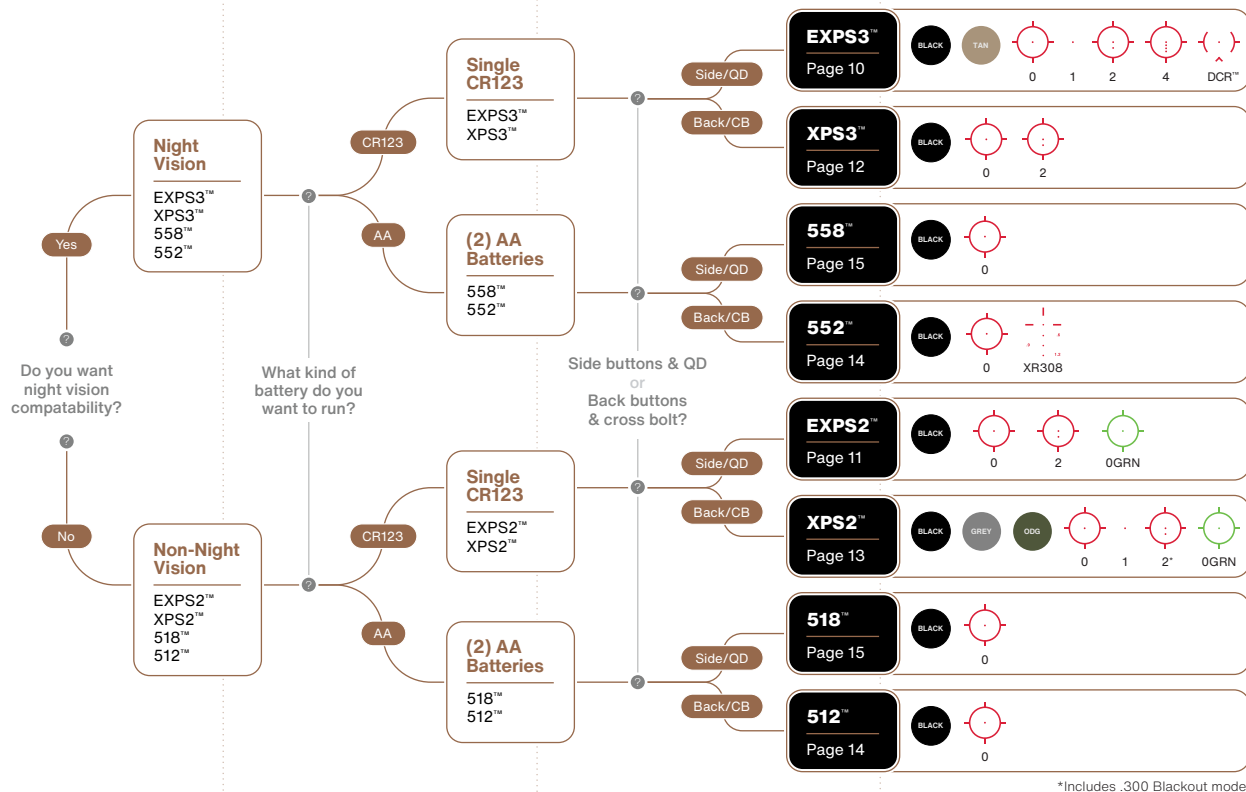



EXPS3™



EXPS3™



EXPS3-0 | EXPS3-1 | EXPS3-2 | EXPS3-4*
EXPS3-0 TAN | EXPS3-1 TAN | EXPS3-2 TAN
EXPS3-DCR

BLACK

TAN

WEIGHT 11.2oz / 317.5g

L x W x H 3.8" x 2.3" x 2.9" / 96.5 x 58.4 x 73.7mm

- True two-eyes-open shooting for quick target acquisition
- Includes night vision compatible settings
- Equipped with a 7mm raised quick-detach base for lower 1/3 iron sight co-witness
- Excellent choice for professionals



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



DCR™



0



1



2



4*

*Aiming dots on the 4-dot reticle may not be distinguishable without magnification.

EXPS2™

EXPS2-0 | EXPS2-2 | EXPS2-0GRN

BLACK

WEIGHT 11.2oz / 317.5g

L x W x H 3.8" x 2.3" x 2.9" / 96.5 x 58.4 x 73.7mm

- Maximizes rail space with its compact size
- Allows for co-witnessing of iron sights
- Convenient side buttons to add a magnifier
- Includes an adjustable, locking, quick-detach lever for easy attachment and removal
- Available with a green reticle, which is approximately 6x easier to see than a red reticle in daytime




One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier





XPS3™

XPS3™

XPS3-0 | XPS3-2

BLACK

WEIGHT 9.0oz / 255g

L x W x H 3.8" x 2.1" x 2.5" / 96.5 x 53.3 x 63.5mm

- The shortest and lightest night vision compatible HWS*
- Powered by a single transverse-mounted CR123 lithium battery
- Provides additional rail space
- Leaves more room for rear iron sights, magnifiers, or night vision mounts




One CR123 battery



7/64 hex head cross-bolt attachment, absolute co-witness



Back button location



0

2

XPS2™

XPS2-0 | XPS2-0GREY | XPS2-0ODG | XPS2-1 |
XPS2-2 | XPS2-300** | XPS2-0GRN*

BLACK

GREY*

ODG*

WEIGHT 9.0oz / 255g

L x W x H 3.8" x 2.1" x 2.5" / 96.5 x 53.3 x 63.5mm

- Non-night vision version of our shortest and lightest HWS*
- Includes five reticle options
- Green reticle available, approximately 6x easier to see than red in daytime
- XPS2-300 model features a two-dot ballistic drop reticle for .300 Blackout rounds
- Available in a 0-reticle limited edition grey finish or OD green



One CR123 battery



7/64 hex head cross-bolt attachment, absolute co-witness



Back button location



0

1



2



2**

Supersonic/
Subsonic



0

GREEN

*Grey and OD Green finishes only available with 0-reticle **Available in black only



HWS*

MAGNIFIERS

HWS* HYBRID SIGHTS

REFLEX SIGHTS

VUDU® RIFLESIGHTS

NV + IR

PRODUCT INDEX

512™

512™

512.A65

BLACK

WEIGHT 11.5oz / 326g**L x W x H** 5.6" x 2" x 2.5" / 142.2 x 50.8 x 63.5mm

- Most popular non-night vision HWS* model
- Ideal for fast target acquisition
- Uses globally available AA battery



Two AA batteries



7/64 hex head cross-bolt attachment



Back button location



0

552™

552™



552.A65 | 552.XR308

BLACK

WEIGHT 11.5oz / 326g**L x W x H** 5.6" x 2" x 2.5" / 142.2 x 50.8 x 63.5mm

- Ideal entry-level night vision compatible HWS*
- Uses globally available AA battery
- Compatible with 1" Weaver and MIL STD-1913 rails



Two AA batteries



7/64 hex head cross-bolt attachment



Back button location



0

XR308



518TM

518TM

518.A65

BLACK

WEIGHT 13.8oz / 391.2g

L x W x H 5.6" x 2" x 2.9" / 142.2 x 55.9 x 73.7mm

- Uses globally available AA batteries
- Side buttons allow positioning close to a magnifier
- Reduces rail space usage



Two AA batteries



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



558TM

558TM

558.A65

BLACK

WEIGHT 13.8oz / 391.2g

L x W x H 5.6" x 2" x 2.9" / 142.2 x 55.9 x 73.7mm

- Compatible with all Gen I-III night vision devices
- Uses globally available AA batteries
- Adjustable, locking, quick-detach mount



Two AA batteries




Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier




HWS® RETICLE PATTERNS



**MOST
POPULAR**

0-RETICLE

The 68 MOA ring with a 1 MOA dot enables fast target acquisition and provides three aiming points, calibrated for .223 Cal. 62 Gr., 2,900 Vel. Other calibers can be used by determining the ranges. With shotguns, the ring approximates shot patterns, which vary based on choke and shell type.



NEW


DCR™

A 68 MOA ring with the top cutout and an easy-to-locate chevron at the bottom. Zero your .223/5.56 rifle at 50 yards and the DCR™ offers confident aiming points for up to 200 yards, with an additional 7-yard close-range solution at the chevron point.




1-RETICLE

The 1 MOA dot-only reticle is ideal for users familiar with red dot sights, offering the simplicity of a single dot with the enhanced benefits of the HWS®.




2-RETICLE



2-RETICLE / .300 BLK

The two-dot reticle is easily distinguishable with or without magnification, calibrated for .223 Cal. 62 Gr., 2,900 Vel. with options for other loads and calibers. The .300 Blackout reticle aiming points are designed for subsonic and supersonic rounds. It's optimized for a 16" barrel using 110 Gr. supersonic and 220 Gr. subsonic ammunition.



4-RETICLE


This ballistic reticle is optimized for use with 5.56 NATO/.223 Cal. with 62 Gr. M855 FMJ rounds at approximately 2,680 fps from a 14.5" barrel. Note that the aiming dots may not be clearly distinguishable without magnification.



XR308 RETICLE

The XR308 reticle is specifically designed for the military M240 machine gun. It's calibrated for .308 Cal., 150 Gr. M59 FMJ rounds at approximately 2,800 fps from a 24.8" barrel.





BATTLE TESTED

MAGNIFIERS

Quick transitions between close-quarters and medium-range targets are crucial. Our compact 3x and 5x magnifiers allow instant distance changes without losing accuracy. Mounted behind the EOTECH HWS®, the magnifier flips aside for 1x targeting and pairs smoothly with Models 518, 558, and EXPS for easy use.

FEATURES + ADVANTAGES

HORIZONTAL & VERTICAL ADJUSTMENT

Moves reticle to desired position



ADJUSTABLE DIOPTER

Customize the focus to your vision




INSTANT TRANSITION

Quickly flip up or to the side



QUICK-DETACH LEVER

Adjustable, locking throw lever for immediate attachment or removal



QUICK TRANSITION

Near-instant transitions between two distances without losing weapon accuracy, effortlessly achieved with our 3x and 5x magnifiers for consistent precision at various ranges.





ADAPTABLE DESIGN

Ambidextrous and equipped with a locking, adjustable, quick-detach lever system allowing for immediate attachment or removal.



MAINTAIN PRECISION

Due to holography, the HWS's 1 MOA aiming dot is maintained even when using a 3x or 5x magnifier. This ensures a sharp, pinpoint dot on a target that appears 3 or 5 times larger, enhancing accuracy at greater distances.

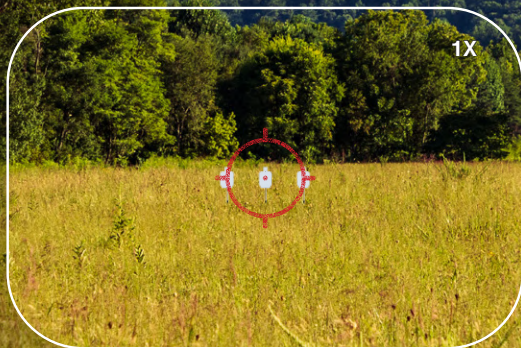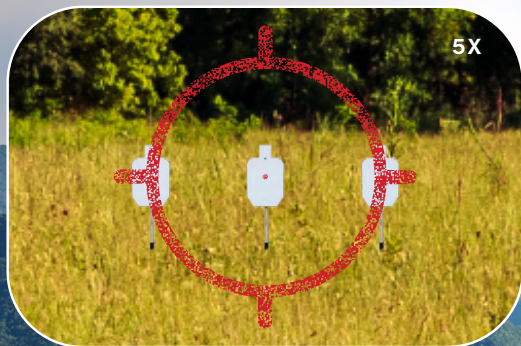

G45TM

5X



G45TM G45.STS | G45.STS TAN | G45.NM*
G45.NM TAN*

BLACK

TAN

WEIGHT 12.8oz / 362.9g

L x W x H 3.9" x 2.3" x 3.3" / 99 x 58.4 x 83.8mm

- Fast transition between 5x and 1x magnification
- Tool-free vertical and horizontal adjustments
- Large field-of-view
- Powerful 5x magnification long-range precision
- Compatible with all EOTECH HWS* models



Adjustable, locking, quick-detach throw lever



Water-resistant up to 33 ft. (10m)

*No mount, magnifier only option

G43™

3X



G43™ G43.STS | G43.STS TAN | G43.NM*
G43.NM TAN*

BLACK

TAN

WEIGHT 11.3oz / 320.3g

L x W x H 3.1" x 2.3" x 3.3" / 78.7 x 58.4 x 83.8mm

- Compact version of the battle-tested G33® Magnifier
- Ultra-compact and lightweight magnifier
- Fast transition between 3x and 1x magnification
- Tool-free vertical and horizontal adjustments
- Compatible with all EOTECH HWS® models



Adjustable, locking, quick-detach throw lever



Water-resistant up to 33 ft. (10m)

*No mount, magnifier only option

G33®

3X



G33® G33.STS | G33.STS TAN | G33.NM*
G33.NM TAN*

BLACK

TAN

WEIGHT 10.6oz / 300g

L x W x H 3.94" x 2.2" x 3.3" / 100.1 x 55.9 x 73.7mm

- Selected magnifier of USSOCOM
- Fast transition between 3x and 1x magnification
- Tool-free vertical and horizontal adjustments
- Large field-of-view with an adjustable diopter for improved, precise focusing
- Compatible with all EOTECH HWS® models



Adjustable, locking, quick-detach throw lever



Water-resistant up to 33 ft. (10m)

*No mount, magnifier only option

HHS[®]

HOLOGRAPHIC HYBRID SIGHTS

Holographic Hybrid Sights (HHS[®]) allows the operator to dominate close and long-range targets with pinpoint accuracy and even greater speed. With a choice of 5x or 3x magnification and our quick switch-to-side (STS) mount one can engage at any distance within range without hesitancy.



FEATURES

COMPLETE OPTICAL SYSTEM

HHS[®] provides an unparalleled advantage when transitioning from short- to long-range targets with pinpoint precision and speed

RUGGED AND DURABLE

HHS[®] offerings are built tough and water-resistant, ready to withstand extreme conditions and heavy use



CONVENIENCE

All models offer adjustable, locking, quick-detach lever for easy attachment and removal of optics and magnifiers

HHS® GREEN

3X



EXPS2-0GRN

G33°

HHS® GREEN

HHS GRN

BLACK

WEIGHT 22.4oz / 635g**L x W x H** 7.7" x 2.3" x 3.3" / 195.6 x 58.4 x 83.8mm

- Features an EXPS2-0GRN with a G33° 3x magnifier
- Fast transition from close-quarters to medium- and long-range shooting
- Quick Switch-To-Side (STS) mount for simple and quick disengagement of magnifier
- Green reticle is approximately 6x easier to see than red in daylight, for faster target acquisition



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



HHS® II

HHS II

BLACK

WEIGHT 22.4oz / 635g

L x W x H 7.7" x 2.3" x 3.3" / 195.6 x 58.4 x 83.8mm

- Features an EXPS2-2 with a G33° 3x magnifier
- Fast transition from close-quarters to medium- and long-range targets
- Quick Switch-To-Side (STS) mount for simple and quick disengagement of magnifier



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



2



HHS® VI 3X



EXP3-2

G43

HHS® VI

HHS VI

BLACK

- WEIGHT** 23.1oz / 654.8g
L x W x H 6.9" x 2.3" x 3.3" / 175.2 x 58.4 x 83.8mm
- Features an EXP3-2 with a G43 3x magnifier
 - Night vision compatible
 - Requires minimal rail space
 - Pinpoint accuracy at virtually any distance
 - Quick Switch-To-Side (STS) mount for simple and quick disengagement



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



2

HHS® I STC



HHSI STC

BLACK

WEIGHT 25oz / 708.7g

L x W x H 7.6" x 2.75" x 3.75" / 193 x 69.9 x 76.2mm

- Features an EXPS3-0 with a G33® 3x magnifier
- Fast transition from close-quarters to medium- and long-range targets
- Includes Gorilla® Switch-To-Center (STC) mount for simple and quick disengagement of magnifier



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



HHS® I STC

3X



EXPS3-0

G33®

GORILLA®



HHS® V



HHS V

BLACK

WEIGHT 24oz / 680.4g

L x W x H 7.7" x 2.3" x 3.3" / 208.3 x 58.4 x 83.8mm

- Features an EXPS3-4 with a G45™ 5x magnifier
- Fast transition from close-quarters to medium- and long-range targets
- Quick Switch-To-Side (STS) mount for simple and quick disengagement of magnifier
- Wide field-of-view



One CR123 battery



Adjustable, locking, quick-detach throw lever



Side buttons for easy adjustments with a magnifier



4*

*Aiming dots on the 4-dot reticle may not be distinguishable without magnification.

HHS® V

5X




EXPS3-4

G45

EFLX®

MINI REFLEX SIGHT

The EFLX® Mini Reflex Sight is built with the same rugged durability as the renowned HWS® sights. Its tough aluminum housing and large square window enable faster target acquisition, especially in low light. Perfect for professional use, hunting, home defense, and recreational shooting.

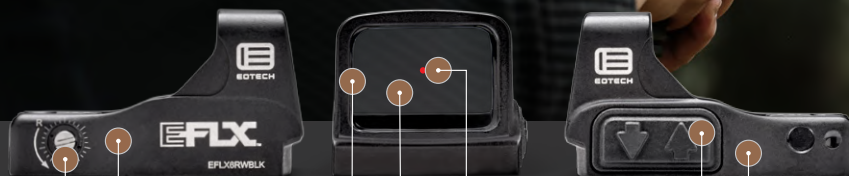

ADJUSTMENT DIALS

Precision windage and elevation adjustment dials

QUICK ACQUISITION

Large, rectangular window for superior field-of-view

AIMING DOT

3 MOA or 6 MOA aiming dots

USER FRIENDLY

Top loading battery for easy battery changes

ALUMINUM HOUSING

Constructed for rugged demands

CLEAR WINDOW

High-tech front glass is clear and distortion-free

PUSH-BUTTONS

ON/OFF and brightness settings at the push of a button

EFLX®

EFLX3RWBLK | EFLX3RWTAN
EFLX6RWBLK | EFLX6RWTAN

BLACK

TAN

WEIGHT 1.4oz / 35g

L x W x H 1.9" x 1.2" x 1" / 47 x 30.5 x 25.4mm

- Ideal for professional use, hunting, and home defense
- Can be used on various platforms
- Designed for pistol use, it is configured to the Leupold® Delta Point Pro™ footprint
- Adapts to appropriately milled slides or a rear dovetail mounting adapter
- Suitable as a 1x solution on rifles with magnified optics
- Durable, heavy-duty aluminum housing
- Large, square viewing window similar in shape to EOTECH's HWS®
- 3 or 6 MOA aiming dot is easy and quick to find
- Top-load, single 2032 battery offers approximately 20,000 hours of run time



One CR2032 battery



Leupold Delta® Point Pro™ footprint

AIMING DOTS

3 MOA

6 MOA



EFLX®



HWS®

MAGNIFIERS

HWS® HYBRID SIGHTS

REFLEX SIGHTS

VUDU® RIFLESCOPES

NV + IR

PRODUCT INDEX

VUDU®

EOTECH® PRECISION RIFLESCOPES

EOTECH's Vudu® riflescopes combine durability, precision, and versatility. Built from aircraft-grade aluminum with XC™ High-Density glass and precise turret systems, Vudu® scopes are engineered for serious precision shooters, ensuring critical accuracy when it matters most.



FEATURES



ADVANTAGES

Aircraft Grade Aluminum

AI

Aircraft-grade aluminum, single-piece construction with anodized finish for extreme durability.

Fog Resistant



Nitrogen gas purging prevents internal fogging over the operating temperature range.

Water Resistant



The single-piece tube and O-ring seal out moisture and dust even in the harshest environments.

Shock Resistant



The rugged design prevents damage from heavy recoil and rough handling.

Reticles for all Platforms



Glass etched reticles, daylight bright aiming dots, MOA or MRAD, Horus® grid patterns, red or green illumination.

Anti-Reflective Lenses



XC™ High-Density, low dispersion glass with anti-reflective coated lenses for unmatched edge-to-edge clarity.


WHAT VUDU® IS RIGHT FOR ME?

Vudu® First Focal Plane Riflescopes


Dynamic Reticle Size: Consistent sub-tensions across all magnifications for precise holdovers.

Quick Adjustments: Simple ranging and adjustments for unknown distances.

Ideal Target Distance: Perfect for tactical and long-range use.



FFP at 5x



FFP at 10x

1-10x28™ | Page 38

1-6x24™ | Page 39

3.5-18x50™ | Page 41

5-25x50™ | Page 42

Vudu® Second Focal Plane Riflescopes

Fixed Reticle Size: Reticle remains the same size throughout the magnification range.


Budget-Friendly: Typically more affordable than FFP scopes.

Less Complexity: Ideal for short to medium-range targets.

Range Estimation: Estimate distance at the highest magnification.



SFP at 5x



SFP at 12x

1-6x24™ | Page 49

2-12x40™ | Page 49

1-8x24™ | Page 44

3-9x32™ | Page 37

3.5-18x50™ | Page 45

8-32x50™ | Page 45





3-9x32 SFP™

VDU3-9SFHC1 | VDU3-9PKG1

BLACK


WEIGHT 16oz / 454g

LENGTH 6.8" / 172.7mm

- Super-short, ideal blend of compactness and performance
- Lightweight and durable from aircraft-grade aluminum
- Easy zero-reset after sighting in
- Illuminated reticle with 10 brightness settings adjusted via rotary dial aids in low-light conditions
- CR2032 battery provides approximately 300 hours of run time at level 5
- Integrated base supports aftermarket mini-ACOG mount
- CQB package offered, includes EFLX® and ring mount
- Position EFLX® on front tube at top or 45 degree offset



EFLX® + RING MOUNT PACKAGE



HC-1



NEW
IN 2025

vudu.
3-9

SECOND
FOCAL PLANE



HWS®

MAGNIFIERS

HWS® HYBRID SIGHTS

REFLEX SIGHTS

VDU® RIFLESOPES

NV + IR

PRODUCT INDEX

vudu®

1-10

FIRST
FOCAL PLANENEW
2025

SR-5 DFG

New diffraction grating illuminates the center aiming point and inner circle only for a daylight bright center in any condition.



1X



10X

1-10x28 FFP™

VDU1-10FFSR4 | VDU1-10FFSR5 | VDU1-10FFLE5 |
VDU1-10SR4TAN | VDU1-10SR5TAN | VDU1-10SR5DF |
VDU1-10SR5DFTAN

BLACK

TAN

WEIGHT 21.3oz / 603g

LENGTH 10.63" / 270mm

- New for 2025, the 1-10x DFG offers a diffraction grating, providing a daylight bright aiming reticle instead of the glass etched design
- First focal plane rifle scope provides uncompromising targeting from extremely close- to long-range
- Robust 34mm, one-piece aircraft aluminum tube and a single-piece eyepiece
- Removable throw-lever for fast magnification changes
- Low-profile elevation turret with push/pull locking system
- Windage turret is capped for a secure zero
- Illuminated, glass-etched reticle and first focal plane design allow for distance estimation at any magnification and lighting condition



SR-5



LE-5



SR-4

1-6x24 FFP™

VDU1-6FFSR1 | VDU1-6FFSR2 | VDU1-6FFSR3 |
VDU1-6FFSR1G | VDU1-6FFSR2G | VDU1-6FFSR3G

BLACK

WEIGHT 20.1oz / 570g
LENGTH 10.63" / 270mm

- Suitable for both the AR platform and bolt action rifles
- The EOTECH® Speed Ring reticle enables fast target engagement at low power
- At higher power, the reticle provides the resolution and accuracy needed for longer shots
- Ideal for short- to medium-range applications



HWS

MAGNIFIERS

HWS-HYBRID SIGHTS

REFLEX SIGHTS

VUDU-RIFLESCOPIES

NV + IR

PRODUCT INDEX



3.5-18x50 FFP™


VDU3-18FFMD1 | VDU3-18FFMD2 | VDU3-18FFH59

BLACK

WEIGHT 33.6oz / 952g

LENGTH 15.13" / 384mm

- Robust 34mm tube and XC™ High-Density glass
- Excellent choice for long-range shooting
- Oversized, precision-machined turrets include an EZ Check Zero Stop feature for quick adjustments and returning to zero, even in low-light conditions
- The side-mounted parallax adjustment allows for easy reticle focus



MD1

MD2



HORUS® H59™



NEW
COLOR &
RETICLE

vudu®

5-25

FIRST
FOCAL PLANE



5-25x50 FFP™

VDU5-25FFMD3 | VDU5-25FFMD4 | VDU5-25MD4TAN
VDU5-25FFTR5 | VDU5-25TR5TAN

BLACK

TAN


WEIGHT 29.5oz / 835g

LENGTH 11.2" / 285mm

- Now in Tan for 2025 and offered in Horus® Tremor5™ reticle (TR5)
- Ideal for short platform rifles
- At approximately 11.2" in length, it is one of the shortest first focal plane riflescopes on the market
- Elevation turret features a push/pull locking system
- It includes EOTECH's EZ Check Zero Stop feature for quick dialing and returning to zero
- Short design allows attachment of either a clip-on night vision or thermal device in front of the scope



HORUS® TREMOR5™



MD3



MD4

NEW
2025



HWS

MAGNIFIERS

HWS HYBRID SIGHTS

REFLEX SIGHTS

VUDU[®] RIFLESIGHTS

NV + IR

PRODUCT INDEX

vudu®
1-8

SECOND
FOCAL PLANE



1-8x24 SFP™


VDU1-8SFHC3 | VDU1-8SFHC3G

BLACK

WEIGHT 20.8oz / 589.7g

LENGTH 10.9" / 278mm

- Second focal plane scope features aircraft-grade aluminum construction
- Bright XC™ High-Density glass and surgically precise turrets
- Intuitive push-button reticle illumination controls
- The HC3 quad-level BDC reticle features a daylight-bright, 0.5 MOA illuminated center dot
- The reticle includes 2-, 5-, 8.5-, and 12.5-MOA sub-tensions on the vertical axis (at 8x power)
- Models include a reticle with either a daylight-bright red or green aiming dot



vudu[®] 3.5-18

SECOND
FOCAL PLANE



3.5-18x50 SFP™

VDU3-18SFHC1

BLACK

WEIGHT 33.6oz / 952g

LENGTH 15.13" / 384mm

- Features EOTECH's XC™ High-Density glass
- Includes a rugged 34mm tube
- Easy-to-use capped tactical windage and elevation turrets to prevent inadvertent changes in zero
- Parallax adjustment ensures crisp focus at any distance



HC1

vudu[®] 8-32

SECOND
FOCAL PLANE



8-32x50 SFP™

VDU8-32SFHC2

BLACK

WEIGHT 32.8oz / 930g













LENGTH 15.4" / 392mm









- Ideal for competitive and recreational long-range shooting
- Competition-style turrets with large, easy-to-read minute-of-angle adjustments
- Turrets are calibrated in .125 MOA (1/8" per click), providing extreme precision and accuracy



HC2

VUDU® RETICLE PATTERNS

<p>SR-1</p>  <p>1X 6X</p>	<p>SR-2</p>  <p>1X 6X</p>	<p>SR-3</p>  <p>1X 6X</p>	<p>HORUS® H59™</p>  <p>5X 25X</p>
<p>SR-1 G</p> <p>GREEN</p>  <p>1X 6X</p>	<p>SR-2 G</p> <p>GREEN</p>  <p>1X 6X</p>	<p>SR-3 G</p> <p>GREEN</p>  <p>1X 6X</p>	<p>SR-5 DFG</p> <p>NEW 2025</p> <p>New diffraction grating illuminates the center aiming point and inner circle only for a daylight bright center in any condition.</p>  <p>1X</p>
<p>SR-4</p>  <p>1X 10X</p>	<p>LE-5</p>  <p>1X 10X</p>	<p>SR-5</p>  <p>1X 10X</p>	 <p>10X</p>

MD1  3.5X 18X	MD2  3.5X 18X	MD3  5X 25X	MD4  5X 25X
HC1  3.5X 18X	HC2  8X 32X	HC3  1X 8X	MORE ON OUR RETICLES <p>For more in-depth measurements, breakdowns, and ballistic information of our full reticle line-up, scan the QR Code below:</p>  RETICLE INFO
<div data-bbox="155 689 337 710">HORUS® TREMOR5™</div> <div data-bbox="252 791 298 823"></div> <div data-bbox="263 902 286 918">5X</div> <div data-bbox="391 724 617 884"></div> <div data-bbox="489 902 520 918">25X</div> <div data-bbox="674 689 745 742">NEW 2025</div> <div data-bbox="766 689 828 710">HC3 G</div> <div data-bbox="786 742 863 774"></div> <div data-bbox="813 902 836 918">1X</div> <div data-bbox="890 742 1027 880"></div> <div data-bbox="945 902 970 918">8X</div>			

VUDU X™

A man with a beard and sunglasses, wearing a camouflage jacket and a baseball cap, is holding a black rifle. The rifle is equipped with a Vudu X riflescope. The background is a blurred outdoor setting.

EOTECH® PRECISION OPTICS

The Vudu X™ Series riflescopes are built for durability and clarity, perfect for hunting, 3-Gun, and recreational shooting. A second focal plane optic design with an illuminated reticle allows for accurate targeting in low-light conditions, ensuring precision in any environment or magnification level.

vuduX™

1-6

SECOND
FOCAL PLANE



1-6x24 SFP™

VDX1-6SFDPI | VDX1-6SFBD1

BLACK

WEIGHT 17.8oz / 505g

LENGTH 10.3" / 261mm

- Instant transitions from close- to mid-range targets
- The magnification power ring offers fluid motion, enhanced by an threaded throw lever
- Illuminated reticle aids in low-light environments
- Capped turrets protect your zero from inadvertent adjustments



vuduX™

2-12

SECOND
FOCAL PLANE



2-12x40 SFP™



VDX2-12SFDPI | VDX2-12SFBD1

BLACK

WEIGHT 21.1oz / 597g

LENGTH 12.6" / 320mm

- Aircraft-grade aluminum construction
- Bright illuminated reticle
- Precision turrets provide pinpoint accuracy
- Capped turrets protect your zero from inadvertent adjustments
- Clear, crisp glass and generous eye relief make it ideal for short- to medium-range targets



NV + IR

A close-up, slightly blurred photograph of a soldier's head wearing a combat helmet. Mounted on the helmet are several pieces of night vision and infrared (NV+IR) equipment, including a large night vision device and a smaller infrared sensor. The soldier's face is partially visible through the helmet's visor, which is also equipped with a night vision device. The background is out of focus, showing a natural, outdoor environment.

NIGHT VISION AND INFRARED OPTICS

EOTECH®, a leader in electro-optics for military, law enforcement, hunting, and recreation, has partnered with Theon Sensors to offer a full line of military-grade night vision and thermal imaging products. From head-worn devices to clip-on systems, EOTECH® provides high-performance solutions to dominate in low-light conditions.

OGL®

EOT-OGL-S-T |
EOT-OGL-S-G

TAN

GREY

WEIGHT* 8oz / 227g

L x W x H* 4.1" x 2.3" x 1.5" / 102.9 x 58.2 x 37.8mm

*With pattern generators, diffusers and battery

- Available in a standard power (MIL/LE) model
- Single CR123 lithium battery offers up to 9 hours of run time
- All-aluminum housing provides extreme durability
- Compact design, similar in size to a deck of playing cards
- IR illuminator utilizes a high performing VCSEL diode for a crisp, clean beam
- IR and visible aim lasers are optically paired for easy zeroing
- Unique sliding lever controls IR illuminator beam divergence, allowing for easy adjustment even in the dark
- Crane-type laser port with Modlite 7" switch included
- Tethered protective caps and pattern generators

		Specs at 23 °C (72 °F)	Max Safety Class
Visible Aim Laser	Output Power Low	≤ 4.7 mW	3R
	Output Power High	≤ 30 mW	3B
	Beam Divergence	< 0.5 MRAD	
	Wavelength	520 (±10) nm	
NIR Aim Laser	Output Power Low	≤ 0.7 mW	3R
	Output Power High	≤ 35 mW	3B
	Beam Divergence	< 0.5 mRAD	
	Wavelength	850 (±10) nm	
NIR Illuminator	Output Power Low	≤ 2.7 mW	3R
	Output Power High	≤ 105 mW	3B
	Beam Divergence	SPOT ≥23, FLOOD ≥105 MRAD	
	Wavelength	860 (+10/-30) nm	

OGL* Chart Data Subject To Change



On-Gun Laser

OGL®



Product conforms to 21 CFR 1040.10 & 11 via Variance FDA-2023-V-4393 effective Oct. 16, 2023

WARNING: THIS IS A LASER PRODUCT. LASER RADIATION MAY BE EMISSION FROM THE OPENING OF THE LASER. LASER RADIATION MAY BE EMISSION FROM THE OPENING OF THE LASER. LASER RADIATION MAY BE EMISSION FROM THE OPENING OF THE LASER.

HWS*

MAGNIFIERS

HWS* HYBRID SIGHTS

REFLEX SIGHTS

VUDU® RIFLESIGHTS

NV + IR

PRODUCT INDEX



MonoNV

MonoNV™

EOT-MONO-AI-B

BLACK

WEIGHT ≤ 10.6oz / 300g

L x W x H 4.6" x 2.1" x 2.9" / 116 x 53 x 74mm

- An image intensified, tubed night vision device
- Built to the same rigorous standard (MIL-STD-810G) as the military AN/PVS-14 system
- Multi-purpose monocular can be used hand-held, helmet/head-mounted, or weapon-mounted
- Features lightweight and robust construction with superior optical characteristics
- Utilizes Gen III White Phosphor tube technology for maximum target detection and recognition range
- Internal LED indications for IR ON and low battery
- Manual gain control
- Tilt auto-off

TECHNICAL SPECIFICATIONS

Power Source	1 AA battery - alkaline or lithium max 2.4 Vdc
Battery Life (approx.)	@73 °F / lithium ~60 hrs / alkaline ~40hrs
Field-of-View	40°
Minimum Focus Distance	9.8 in (25cm)
Diopter Adjustments	+2 to -6
Water Resistant	66 ft (20m) for 1 hour: MIL-STD 810G
Image Intensification Tube	Gen III White Phosphor
Figure of Merit (FOM)	2376 minimum FOM

BinoNV-W™

EOT-BINO-AI-B-W

BLACK

WEIGHT 17.6oz / 1.1 lbs / 500g including battery

L x W x H 4.1" x 3.94" x 2.9" / 104 x 100 x 74mm

- Cutting-edge, compact, lightweight night vision goggle
- Built to full MIL-SPEC standards (MIL-STD-810G)
- Binocular systems provide better depth perception than single tube systems, making this ideal for navigating on foot or by vehicle and interacting with the environment
- Includes built-in diopter adjustments, making it suitable for special operations forces and SWAT applications
- Fully articulable design allows each monocular to be flipped up easily and independently
- Self-contained single AA battery power, optional external battery pack adds additional run time
- Auto-gated power supply improves resolution in high light environments and provides auto cut-off for intense light
- Manual gain control
- Includes Wilcox® G24 Mount

TECHNICAL SPECIFICATIONS

Power Source	1 AA battery - alkaline, lithium, or rechargeable
Battery Life (approx.)	Lithium >25 hrs / alkaline >15 hrs
Field-of-View	47°
Minimum Focus Distance	9.8 in (25cm)
Diopter Adjustments	+2 to -6
Water Resistant	66 ft (20m) for 1 hour: MIL-STD 810G
Image Intensification Tube	Gen III White Phosphor
Figure of Merit (FOM)	2376 minimum FOM



BinoNV-W

WILCOX® G24 MOUNT



Included in every kit

3 BATTERY PACK



Optional battery pack adds additional run time

HWS*

MAGNIFIERS

HWS* HYBRID SIGHTS

REFLEX SIGHTS

VUDU® RIFLESIGHTS

NV + IR

PRODUCT INDEX



ClipNV

ClipNV™

EOT-CLPO-AI-B

BLACK

WEIGHT 31.7oz / 2.0 lbs / 900g including battery

L x W x H 7.1" x 3.5" x 3.2" / 179.2 x 89.8 x 82.4mm

- Clip-on night vision device designed for rifle-mounted use
- Provides unrivaled target detection and identification capability
- Designed for use with low-to-medium power (1-12x) magnification day sights
- Allows for night targeting while maintaining the day optic's ballistic zero
- Features simple ON/OFF, manual gain control, and focus knobs that are ergonomically positioned
- Attaches quickly and easily to Picatinny (1913) rails
- Includes an auxiliary Picatinny rail for the installation of accessory equipment such as IR illuminators/designators

TECHNICAL SPECIFICATIONS

Power Source	1 AA battery - alkaline, lithium, or rechargeable
Battery Life (approx.)	Lithium >60 hrs
Field-of-View	13.7°
System Focus Distance	10m to infinity
Environmental	Complies with MIL-STD 810G
Max. Allowable Zero Shift	< 1 MOA
Image Intensification Tube	Gen III White Phosphor
Figure of Merit (FOM)	2376 minimum FOM

MK2 ClipIR-LR™

EOT-CLPO-DT2-B-LR

BLACK

WEIGHT 23.6oz / 1.48 lbs / 670g

L x W x H 7" x 3.1" x 3" / 178 x 79 x 77mm

- MK2 ClipIR-LR is an uncooled thermal clip-on device
- Features state-of-the-art image enhancement algorithms for superior day/night vision capabilities
- Provides unrivaled advantage in detecting, observing, and engaging targets
- Incorporates the latest in IR sensors, electronics, and optical technologies for world-leading reliability and imagery
- Designed for use with red dots or mid magnification range (4-10x) day sights
- Maintains the day optic's ballistic zero while providing thermal detection, observation, and engagement
- Includes an intuitive user interface with image/video capture, Wifi, and Bluetooth connectivity
- Attaches quickly and easily to Picatinny (1913) rails

TECHNICAL SPECIFICATIONS

Power Source	3 AA batteries - alkaline, lithium, or rechargeable
Battery Life (approx.)	>8 hrs
Field-of-View	8.7°
Magnification	1X (2X and 4X digital zoom)
System Focus Distance	20m to infinity
Water Resistant	Complies with MIL-STD 810G, MIL-STD461E and IP67
Pixels	1280 x 1024
Pixel Pitch	12 µm
Micro Display Color	Black / white / color



MK2 ClipIR-LR

HWS*

MAGNIFIERS

HWS* HYBRID SIGHTS

REFLEX SIGHTS

VUDU* RIFLESIGHTS

NV + IR

PRODUCT INDEX

MODEL	MEASUREMENTS		WEIGHT		WATER RESISTANT		FINISH				POWER SOURCE		RETICLES								ADDITIONAL FEATURES						
	Inches	Millimeters	Ounces	Grams	10 ft. (3m)	33 ft. (10m)	Black	Tan	Grey	OD Green	1 × CR123	2 × AA	0	0 Green	1	2	300	4	XR308	DCR	NV Comp.	QD Mount	Side Button	Back Button			
	L × W × H	L × W × H																									
EXPS3 pg. 10	L 3.8 × W 2.3 × H 2.9	L 96.5 × W 58.4 × H 73.7	11.2 oz / 317.5g			●	●	●			●		●		●	●		●		●	●	●	●				
EXPS2 pg. 11					●		●				●		●					●						●	●		
EXPS2 GREEN pg. 11					●		●						●			●									●	●	
XPS3 pg. 12	L 3.8 × W 2.1 × H 2.5	L 96.5 × W 53.3 × H 63.5	9.0 oz / 255g			●	●				●		●			●					●			●			
XPS2 pg. 13					●		●				●		●		●	●										●	
XPS2 GREY pg. 13					●				●			●		●												●	
XPS2 OD GREEN pg. 13					●						●	●		●												●	
XPS2 GREEN pg. 13					●		●					●				●											●
XPS2 300BLK pg. 13					●		●						●								●						●
512 pg. 14	L 5.6 × W 2.0 × H 2.5	L 142.2 × W 50.8 × H 63.5	11.5 oz / 326g		●		●					●	●											●			
552 pg. 14						●	●						●	●							●		●			●	
518 pg. 15	L 5.6 × W 2.2 × H 2.9	L 142.2 × W 55.9 × H 73.7	13.8 oz / 391.2g		●		●					●	●									●	●				
558 pg. 15						●	●						●	●									●	●	●		

MAGNIFIERS

MODEL	MEASUREMENTS		WEIGHT		VIEW			FINISH		ADDITIONAL FEATURES			
	Inches	Millimeters	Ounces	Grams	Fixed Magnification	Eye Relief	Field-of-View	Black	Tan	Water-Resistance 33 ft (10m)	QD Mount	Switch-to-Side	No Mount
	L × W × H	L × W × H											
G45 pg. 20	3.9 × 2.3 × 3.3	99 × 58.4 × 83.8	12.8 oz / 362.9g		5x	2.6" / 66mm	4.4°	●	●	●	●	●	●
G43 pg. 21	3.1 × 2.3 × 3.3	78.7 × 58.4 × 83.8	11.3 oz / 320.3g		3x	2.5" / 63.5mm	7.5°	●	●	●	●	●	●
G33* pg. 21	4.4 × 2.2 × 3.3	113 × 55.9 × 73.7	10.6 oz / 300g		3x	2.2" / 55.9mm	7.5°	●	●	●	●	●	●

HOLOGRAPHIC HYBRID SIGHTS

MODEL	PRODUCT DETAILS			MEASUREMENTS		WEIGHT	
	Magnification	HWS*	Magnifier	Inches	Millimeters	Ounces	Grams
				L × W × H	L × W × H		
HHS® GREEN pg. 24	3x	EXPS2-0GRN	G33*	8.2 × 2.3 × 3.3	208.3 × 58.4 × 83.8	22.4 oz / 635g	
HHS® II pg. 25	3x	EXPS2-2	G33*	8.2 × 2.3 × 3.3	208.3 × 58.4 × 83.8	22.4 oz / 635g	
HHS® VI pg. 26	3x	EXPS3-2	G43	6.9 × 2.3 × 3.3	175.2 × 58.4 × 83.8	23.1 oz / 654.8g	
HHS® I STC pg. 27	3x	EXPS3-0	G33*	8.1 × 2.75 × 3.75	205.7 × 69.9 × 76.2	25 oz / 708.7g	
HHS® V pg. 29	5x	EXPS3-4	G45	7.7 × 2.3 × 3.3	208.3 × 58.4 × 83.8	24 oz / 680.4g	

*See specific models for further details.

MINI REFLEX SIGHT

MODEL	MEASUREMENTS		WEIGHT		FINISH		POWER SOURCE	RETICLES		ADDITIONAL FEATURES	
	Inches	Millimeters	Ounces	Grams	Black	Tan	CR2032	3 MOA	6 MOA	Mounting Interface	Leupold® Delta Point Pro™
	L × W × H	L × W × H								Daytime Settings	8 (7 daytime / 1 ultra-bright)
										Switch Type	Push button
										Programmable Auto-shutoff	12 hours or never
										Housing Material	Aluminum
										Battery Load	Top
	EFLX® pg. 31	1.9 × 1.2 × 1								47 × 30.5 × 25.4	1.4
										6 MOA Battery Life	20,000 hrs (@ brightness level 5)



	MODEL	MEASUREMENTS				WEIGHT		FOCAL PLANE		FINISH		RETICLE COLOR		RETICLES															
		Length		Tube Diameter	Objective Diameter	Ounces	Grams	First	Second	Black	Tan	Red	Green	SR-1	SR-2	SR-3	SR-4	SR-5	SR-5 DFG	MD1	MD2	MD3	MD4	LE-5	Horus® H59™	Horus® TR5™	HC1	HC2	HC3
		in.	mm.																										
★	3-9x32 pg. 37	6.8	172.7	NA	32mm	16	454		●	●		●															●		
	1-10x28 pg. 38	10.63	270	34mm	28mm	21.3	603	●		●	●	●					●	●	●					●					
	1-6x24 pg. 39	10.63	270	30mm	24mm	20.1	570	●		●		●	●	●	●	●													
★	3.5-18x50 pg. 41	15.13	384	34mm	50mm	33.6	952	●		●		●								●	●				●				
★	5-25x50 pg. 42	11.2	285	34mm	50mm	29.5	835	●		●	●	●										●	●			●			
	1-8x24 pg. 44	10.9	278	30mm	24mm	20.8	589.7		●	●	●	●	●																●
	3.5-18x50 pg. 45	15.13	384	34mm	50mm	33.6	952		●	●		●															●		
	8-32x50 pg. 45	15.4	392	34mm	50mm	32.8	930		●	●		●																●	

★ = NEW FOR 2025

VUDU X™

MODEL	MEASUREMENTS				WEIGHT		FOCAL PLANE		FINISH	RETICLE COLOR		RETICLES	
	Length		Tube Diameter	Objective Diameter	Ounces	Grams	First	Second	Black	Red	Green	DPI	BD1
	in.	mm.											
1-6x24 pg. 49	10.3	261	30mm	24mm	17.8	505		●	●	●		●	●
2-12x40 pg. 49	12.6	320	30mm	40mm	21.1	597		●	●	●		●	●

All EOTECH® materials are for informational purposes only and do not constitute any binding obligations or agreements by EOTECH®.

All claims about performance and performance characteristics assume normal, responsible usage within the warranty period.

EOTECH® reserves the right to change the product specifications at any time without notice.

This document consists of general capabilities information that is not defined as controlled technical data under ITAR, Part 120.10 or EAR, Part 772.



EOTECH®

46900 PORT STREET
PLYMOUTH, MI 48170 USA
+1 888-368-4656

EOTECHINC.COM

2025.V2

YEARS

©Copyright 2025 EOTECH, LLC. All rights reserved. EOTECH®, HWS®, Vudu®,
Vudu X™, EFLX™ and OGL™ are registered trademarks of EOTECH, LLC.