LEAPERS®

2026 PRODUCT CATALOG



NEW PRODUCTS



INTEGRIX® iXF 4.5X28 SERVICE RIFLE SCOPE

A special edition designed for competition, to give you the edge in Across the Course marksmanship from CMP to NRA High Power.

iXF45SA4-7 / iXF45SA4-65 | PG23



UTG PRO® P.O.I® SERVICE RIFLE MOUNT

The UTG Pro P.O.I line expands to offer the P.O.I Service Rifle mount custom-built for the Integrix iXF 4.5X28 Service Rifle Scope.

RI34135C | PG23



INTEGRIX® iX6 4.5-27X56 LR/ELR

Purpose-built for long range with HD image quality, over 92% light transmission, and a patented, easy-to-reset zero stop.

iX645FM1 / iX645FM2 | PG21



INTEGRIX® CARBON FIBER SUNSHADE, 28MM

Lightweight and threaded for Integrix Service Rifle scopes to combat lens flare and glare while protecting lens from rain and debris.


iXSS01 / iXSS02 | PG23



INTEGRIX® iX6 6-36X56 LR/ELR

Extra wide field of view, 32.5 Mils of elevation, 14 Mils of windage, and 92% light transmission to dominate extreme long range.

iX606FM1 / iX606FM2 | PG21

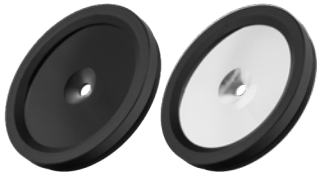

INTEGRIX® LENS REDUCERS

Built for precision, non-opaque clear and tinted threaded lens reducers compatible with Integrix Service Rifle scopes.

iXLR01 | PG23



ACCUSHOT PRO™ AS6 1-6X24 LPVO

First focal plane scope that hits the sweet spot in magnification, FOV, light transmission, and overall performance.

AS601FA1 | PG24



UTG® SNAP-IN M-LOK® PANEL COVERS

Lightweight, heat-resistant, and nonslip textured snap-in M-LOK® covers with cable management passthrough.

RBT-CMP01 | PG60



UTG PRO® SD MONOLITHIC M-LOK® HANDGUARD FOR MP5®

Suppressor Dedicated (SD) Monolithic handguard for the MP5® featuring an extended-length cylindrical forend compatible with K suppressors and up.

MTU055SSMSD | PG10



UTG PRO® SD MONOLITHIC M-LOK® HANDGUARD FOR MP5K®

Suppressor dedicated (SD) Monolithic handguard for the MP5K featuring an extended-length cylindrical forend compatible with K suppressors and up.

MTU055SSMKSD | PG10



UTG PRO® MONOLITHIC M-LOK® HANDGUARD FOR MP5®, EXTENDED-LENGTH

Developed for military and LEO partners and featuring an extended Picatinny frontend for use with legacy lights and QD tri-lug muzzle devices.

MTU055SSME | PG10



UTG PRO® EXTENDED COCKING HANDLE FOR MP5® AND MP5K

One-piece steel charging handle adds length and nonslip texturing for improved manipulation.

CHMP5E | PG11



UTG® GEN II POLYMER MAGAZINES FOR GLOCK®

Optimized magazine body and follower geometry for greater compatibility and function across different platforms and clones.

RBT-GL915-A / GL917-A / PD933-A | PG55



UTG PRO® AK SIDE FOLDING STOCKS

Five-position adjustable, impact and heat-resistant reinforced polymer side-folding stock for the venerable AK platform.

RBU47FS01 / RBU47FS02 | PG13

TABLE OF CONTENTS

INTRODUCTION 02
FOR MP5 08
FOR AK 12
RECEIVERS 15
SCOPES 18
DOT SIGHTS & MAGNIFIERS 30
OPTIC MOUNTS & RINGS 33
IRON SIGHTS 39
HANDGUARDS 41
BIPODS 44
STOCKS, BUFFERS & TUBES 49
GRIPS & HAND STOPS 51
MAGAZINES 54
LIGHTS & LASERS 58
ACCESSORIES & TOOLS 59
SOFT GOODS 64



MANUFACTURING FROM THE GROUND UP

“From day one I felt, I have to know how I build my products. My operation depends on pushing these products out to distributors. But you always have this concern: Who is making this for you? How is it being made? How am I going to control what I want it to do?”

David Ding, Founder and CEO

ABOUT LEAPERS

Leapers was founded in 1992 on a single core belief: the key to making great products lies in building your manufacturing from the ground up. After decades of investment, we own multiple manufacturing facilities from Michigan to Taipei and offer a breadth of products across a multitude of shooting disciplines.

Our mission is to be your ultimate solution provider. When presented with a problem, we strive to think nothing is impossible. Each year is a progression on our floor, from manufacturing billet AR receivers in Michigan to top-of-the-line performance optics in Taiwan.

We believe in equity. As we expanded our machining and our products, we created the Leapers Brand Family to offer solutions suited for customers of different expertise, levels, and means.



LEAPERS BRAND FAMILY

UNDER THE GUN

Affordable and quality equipment for the recreational entry-level shooter who is home-defense orientated and budget-minded, but looking to get started.

MADE IN MICHIGAN

Fusing form and function to distill down to what is truly critical. Real functionality, transparent pricing. Proudly made in USA.

PERFORMANCE OPTICS

Break the barrier to high performance optics. Integrated manufacturing: world-class glass and requirements defined in the field.

SPORTING SCOPES

Built from our Integrix platform, accessible performance for serious shooters to graduate their equipment without breaking the bank.

Third party trademarks may be used in this catalog for the convenience of customers to indicate the fit or compatibility of the applicable Leapers items.

For Patent Information, please visit: www.leapers.com/patents.




OUR CAPABILITIES

Leapers' strength is in our capabilities. We were founded in 1992 with a single-minded mission: to be a solution provider. Over the course of 30 years we have built multinational factories from the ground up, owning our manufacturing from A to Z while preserving an entrepreneurial founder-led culture.

We broke ground on our U.S. manufacturing plant, UTG Pro, in 2009. Each year we acquired new top-of-the-line machines, with a new Mazak CNC and Palletech automation system joining the fleet in 2025. Today UTG Pro operates over 30 world-class CNC machines from Mazak, Haas, and Brother, and a 100-yard indoor shooting range for testing onsite.

We established UTG Taiwan in 2018 as our Research and Development Center outside Taipei, Taiwan, deep in the semiconductor manufacturing neighborhood. Today we own and operate three factories worldwide with a mentality of continually advancing our capabilities.

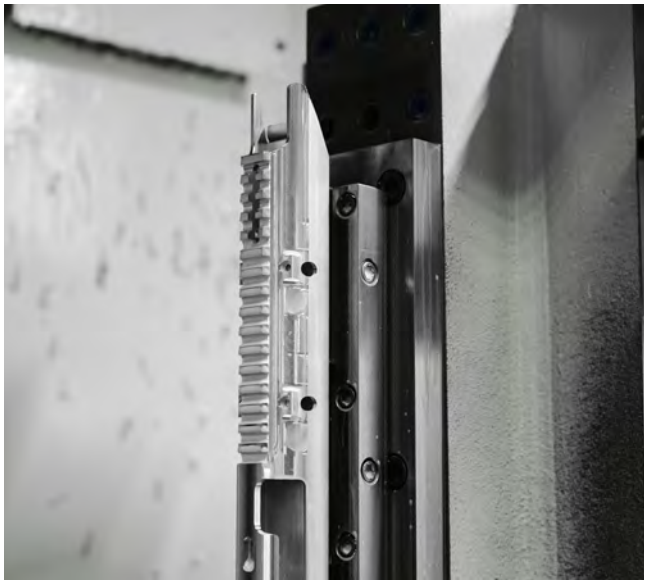


CNC MACHINING

The UTG Pro Monolithic Handguard for the MP5® and MP5K hit the market in 2024. We machine this handguard on a Mazak HCN4000 4-axis horizontal milling machine with a 24 minute cycle time. They are then Type III Class 2 anodized, inspected, and packaged right here in Michigan. Just one example of our daily machining operation.




POLYMER INJECTION

We run Japanese Fanuc Roboshot Electric Polymer Injection Machines with glass fiber-reinforced polymer to give proven and unbeatable durability to our magazines for AR, AK, and Glock®. By running manufacturing in-house, we are able to build for quality and a fair price ecosystem for dealers and end customers alike.

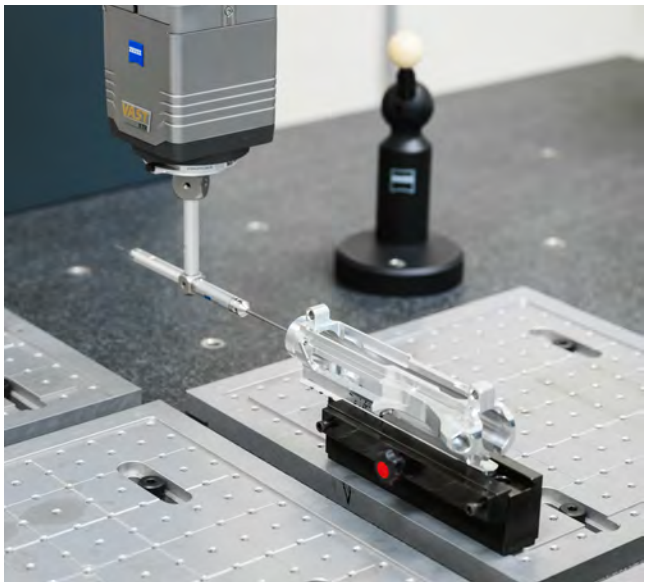


PRECISION QUALITY CONTROL

In 2023 we obtained our 07 license and began manufacturing billet AR receivers in Michigan. Pictured is a specialized precision Zeiss Coordinate Measuring Machine to check the receiver for complex irregular dimensions and guarantee concentricity. We do climate-controlled inspection with state-of-the-art equipment to ensure dimensions and tolerance requirements are met.

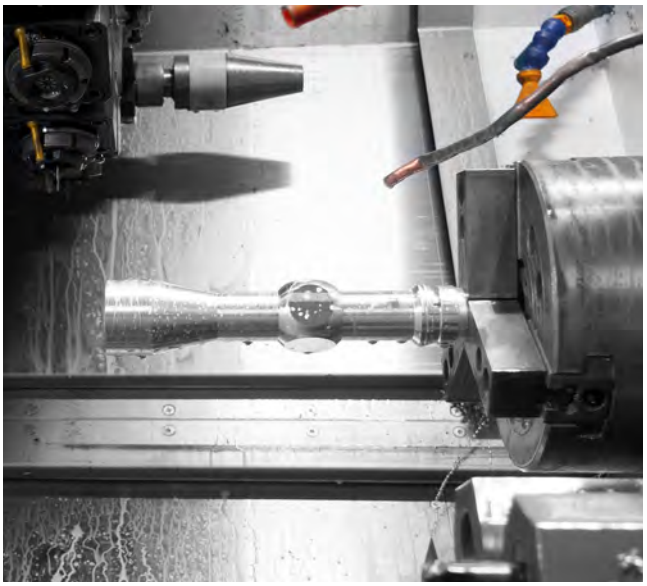

HIGH PERFORMANCE OPTICS

In 2024 we entered production of our high-performance optics brand, Integrix, a key milestone after 5 years of investment in our capabilities. We use premium German and Japanese glass built to spec from our proprietary optical design. We machine, measure, assemble, and test in the lab and on the range from start to finish with meticulous precision to deliver a new level of optics.

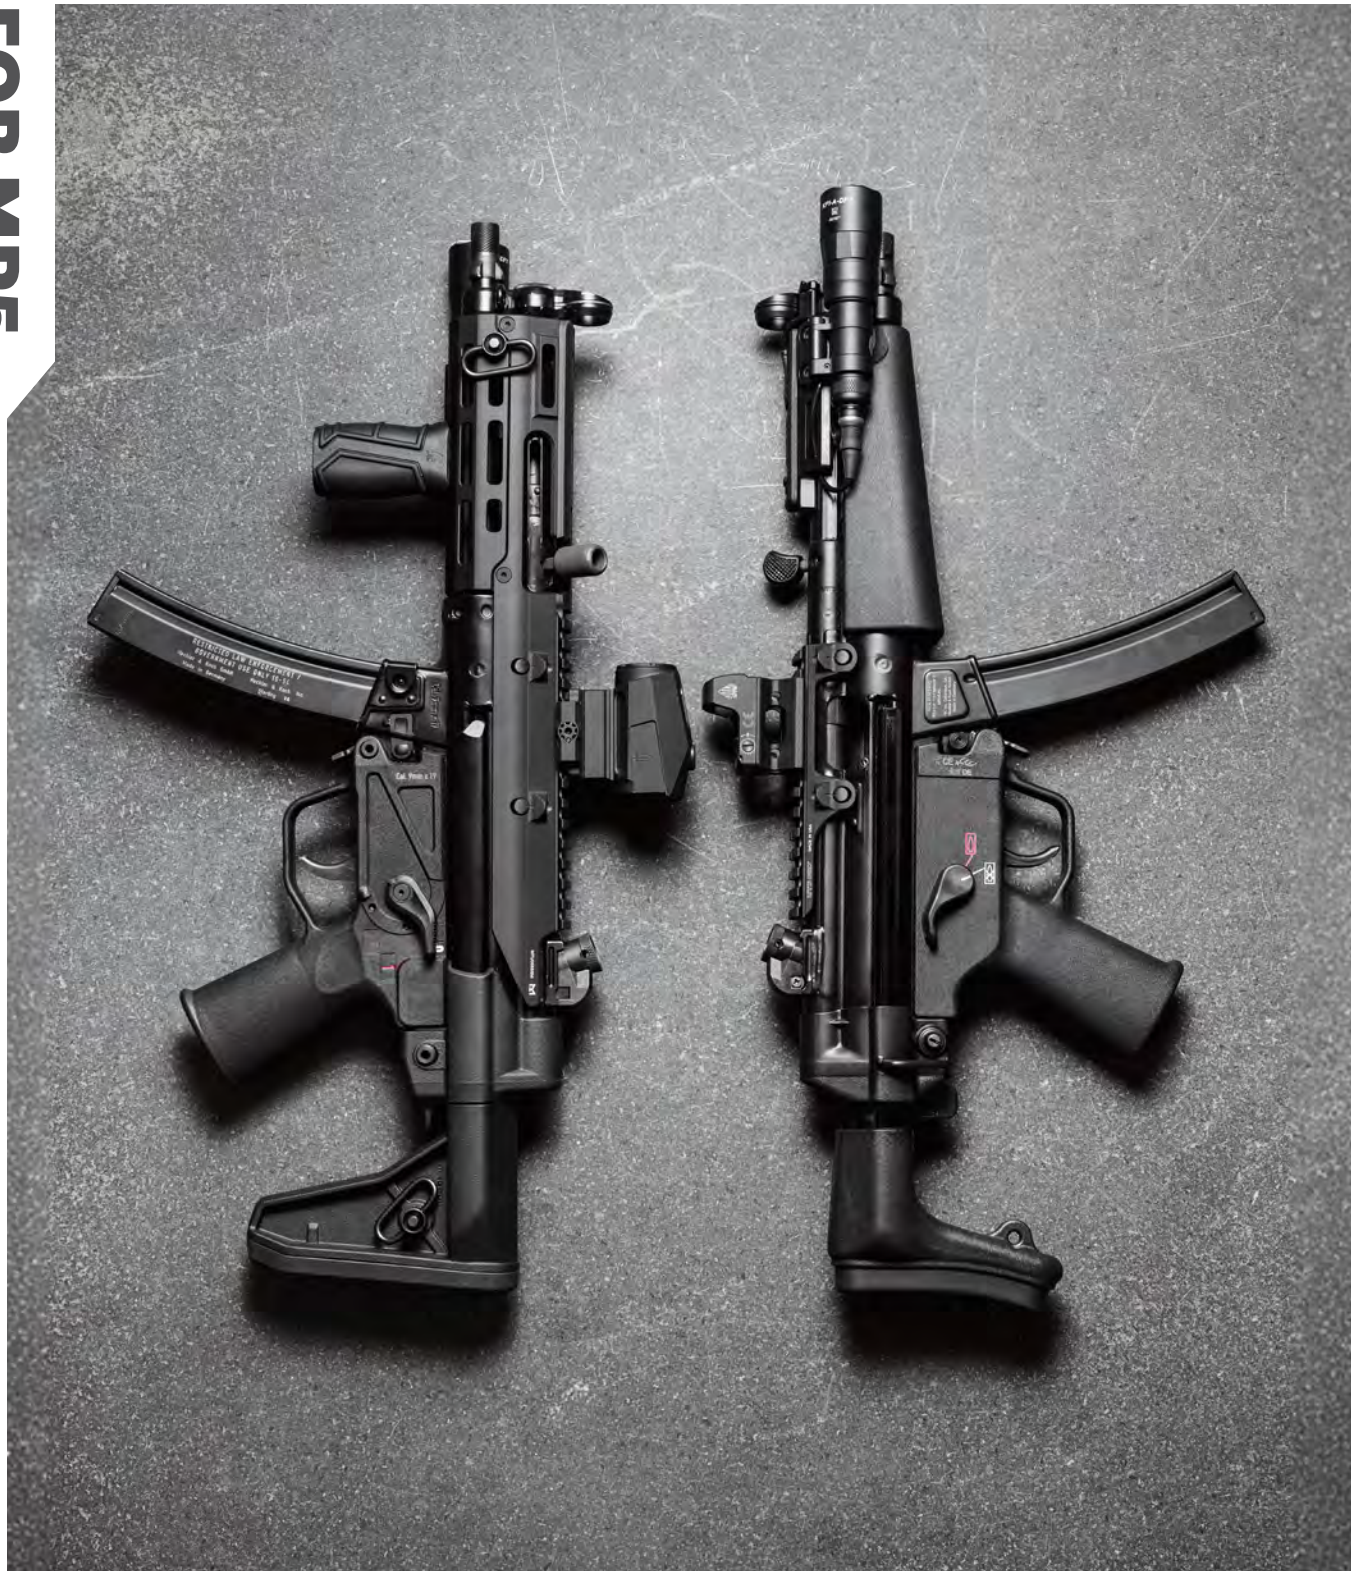

UTG PRO® MONOLITHIC HANDGUARDS

UTG Pro released the Monolithic M-LOK® Handguard for MP5® in 2023, hitting a historic platform with a dash of modern innovation: the optics rail and the handguard, combined into one, complete with a rock-solid, patented locking system. Professional and civilian communities caught on, testing the monolithic handguard around the world. Shooter feedback was incorporated directly into machining updates, expanding the charging handle cutout to accommodate a wider range of tolerances, and increasing compatibility of the K-version across multiple manufacturers. Shooter-driven design, proudly made in Michigan.

FROM UTG PRO®



SD MONOLITHIC HANDGUARDS

Further modernizing the iconic platform, the much-requested SD Monolithic features an extended-length cylindrical forend compatible with K suppressors and up. Its two-inch inner diameter provides the necessary clearance most suppressors will require or in addition to running a suppressor cover or with M-LOK® accessories installed.

EXTENDED COCKING HANDLE

Durable one-piece steel constructed charging handle. Provides just the right amount of additional length and grip texturing for improved manipulation. Pairs well with our Monolithic handguards or works great standalone.





LOW PROFILE CLAW MOUNT

Mirroring the monolithic handguard with its extended Picatinny rail, machined cutout for serial number identification, and its tried-and true patented mounting interface, the UTG Pro claw mount is now also compatible with large-platform models, such as the G3/91, when reversely mounted.

M-LOK® LIGHT MOUNT

Made to pair with the claw mount, the UTG Pro M-LOK® Light Mount is the no-frills M-LOK® compatible light mount for MP5® pattern pistols and rifles, including the MP5SD. Whether fully modernizing or keeping it classic, the light mount securely attaches to the front sight without interfering with handguards.



UTG PRO® MONOLITHIC M-LOK® HANDGUARDS

SUPPRESSOR DEDICATED NEW

Monolithic design combines M-LOK® and optics mount real estate into one.

Extended 4.2" cylindrical handguard compatible with most K-length suppressors and up.

Two-inch inner diameter provides the necessary clearance for most bare or covered suppressors or when having M-LOK® accessories installed.

Patented user-friendly claw mount interface.

Improved handhold and M-LOK® real estate.

Compatible with 9mm receiver MP5® and MP5K clones.

US PAT. 11656059 | US PAT. 11796282



Length 18.65" (473.7 mm)
Width 2.323" (59 mm)
Height 2.87" (72.8 mm)
Weight 15.7 oz (445.2 g)
M-LOK® Slots 34 (Full) / 12 (Half)
Inner Ø 2.1" (53.3 mm)

FOR MP5® /MTU055SSMSD

Length 15.38" (396.7 mm)
Width 2.323" (59 mm)
Height 2.87" (72.8 mm)
Weight 12 oz (340.3 g)
M-LOK® Slots 25 (Full) / 11 (Half)
Inner Ø 2.1" (53.3 mm)

FOR MP5K /MTU055SSMKSD

STANDARD

Monolithic design combines M-LOK® and optics mount real estate into one.

Patented user-friendly claw mount interface.

Compatible with 9mm receiver MP5® and MP5K clones.

US PAT. 11656059 | US PAT. 11796282



Length 13.65" (346.7 mm)
Width 1.69" (42.9 mm)
Height 2.07" (52.6 mm)
Weight 9.6 oz (272 g)
M-LOK® Slots 17 (Full) / 5 (Half)

FOR MP5® /MTU055SSM

Length 11" (279 mm)
Width 1.69" (42.9 mm)
Height 2.07" (53 mm)
Weight 6.9 oz (196 g)
M-LOK® Slots 8 (Full) / 3 (Half)

FOR MP5K /MTU055SSMK

EXTENDED PICATINNY NEW

Monolithic design combines M-LOK® and optics mount real estate into one.

Developed for military and LEO partners and featuring an extended Picatinny frontend for use with legacy lights and QD tri-lug muzzle devices.

Patented user-friendly claw mount interface.

Compatible with 9mm receiver MP5® and clones.

US PAT. 11656059 | US PAT. 11796282



Length 15.90" (404 mm)
Width 1.63" (41 mm)
Height 2.75" (70 mm)
Weight 10.5 oz (298 g)
M-LOK® Slots 19 (Full) / 5 (Half)
Inner Ø 1.33" (34 mm)

FOR MP5® /MTU055SSME

UTG PRO® ACCESSORIES FOR MP5® & MP5K

M-LOK® LIGHT MOUNT

Attaches securely to front sight, does not interfere with handguards.
M-LOK® slots at 11, 12, and 1 o'clock positions.
Lightweight aluminum construction.
For MP5® pattern only, not compatible with K pattern receivers.
US PAT. 12281873 | US PAT. 12410989

Length 4.86" (123 mm)
Width 1.56" (40 mm)
Height 0.67" (17 mm)
Weight 1.6 oz (45 g)
M-LOK® Slots T2.5 / L1 / R2

FOR MP5® /MTU058SSM



CLAW MOUNT

Low profile and extended Picatinny rail.
Machined cutout for serial number identification.
User-friendly claw mount interface.
Lightweight matte black anodized aluminum construction.
Compatible with MP5® and MP5K pattern pistols and rifles.
Compatible with large-platform models, such as the G3/91, when reversely installed.

Length 5.43" (138 mm)
Width 1.63" (41 mm)
Height 1.20" (30 mm)
Weight 2 oz (57 g)
Picatinny Slots 13

FOR MP5®/MP5K /MTU056



EXTENDED COCKING HANDLE NEW

Durable one-piece steel construction.
Extended 1" handle with nonslip knurling.
Optimized for use with UTG Pro monolithic M-LOK® handguards.
Compatible with 9mm receiver MP5®, MP5K, and clones.

Length 2.08" (52.8 mm)
Width 0.5" (12.7 mm)
Weight 1.05 oz (30 g)

FOR MP5®/MP5K /CHMP5E





THE AKM TODAY

The venerable AK platform, a workhorse then and with just a touch of modern enhancements, retains its status when pushed forward to meet today's demand for a go-to rifle of proven reliability.

Harness its full potential with your preference of a Picatinny quad rail or M-LOK® handguard to mount your illumination devices. Stock up dependable, easy to find, and affordable magazines and use the savings towards bumping up your ammo count. Mount up your tried-and-true optic on a quick release side mount that adjusts to most if not all varying side rails out in the wild. Have your AK adjust to your LOP whether training in plain clothes or donning on plates and have it fold and stow out of the way, but always at the ready when grabbing it on the go.



UTG PRO® AK SIDE FOLDING STOCKS NEW 922R Compliant

The UTG Pro AK Side Folder is an impact and heat-resistant glass fiber-reinforced side-folding polymer stock for the AK platform. Compatible with side-mounted optics with its fold-to-the-right design, the stock positively locks into place when deployed and unlocks via a left-sided push-button. When folded, a passive detent keeps the stock securely in place.

The five-position adjustable length of pull (LOP) is configurable to deploy directly to the user's preferred position via spring-loaded activation. An angled nonslip rubberized recoil pad keeps the stock tight in the shoulder pocket and rounding out the features are QD sling swivel cups at the front and rear of the stock.



FOR STANDARD STRAIGHT TANG

Length of Pull (LOP) 13.59"–16.42" (345–417 mm)
LOP Increment 5 Position | 0.71" (18 mm) Per Position
Width 1.25" (32 mm)
Height 5.35" (138 mm)
Weight 19.5 oz (553 g)
Right-side Folding
US PAT. 11067360 | US PAT. 11592264 | US PAT. 11598604

/RBU47FS01

FOR YUGO PATTERN

Length of Pull (LOP) 13.25"–16.1" (336.5–408.9 mm)
LOP Increment 5 Position | 0.71" (18 mm) Per Position
Width 1.25" (32 mm)
Height 5.35" (138 mm)
Weight 19.5 oz (553 g)
Right-side Folding
US PAT. 11067360 | US PAT. 11598604

/RBU47FS02

UTG PRO® AKM DROP-IN HANDGUARDS **922R** Compliant



UNIVERSAL SUPER SLIM M-LOK®

Compatible with most Romanian, Chinese, and US AKM pattern rifles.

Docter® footprint MRDS plate and 9 slot Picatinny rail section included.

US PAT. 10962324

Length 6.20" (157 mm)
Width 1.61" (41 mm)
Height 2.63" (67 mm)
Weight 9.7 oz (275 g)
M-LOK® Slots 15
6061-T6 Aluminum

/MTU053SSM




UNIVERSAL

Compatible with most Romanian, Chinese, and US AKM pattern rifles.

T-marked Picatinny rails with left and right integral QD sling swivel sockets.

Length 8.43" (214.1 mm)
Width 2.05" (52.7 mm)
Height 3.1" (78.7 mm)
Weight 10.1 oz (286.3 g)
Picatinny Slots T14 / B14 / L14 / R14
6061-T6 Aluminum

/MTU009

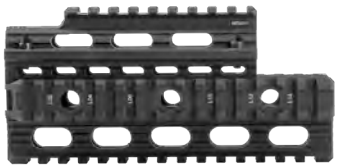

FOR YUGO M70

Compatible with Yugo M70 and also, N-PAP after removal of rear handguard retainer.

T-marked Picatinny rails with left and right integral QD sling swivel sockets.

Length 6.5" (165 mm)
Width 2.05" (52 mm)
Height 3.1" (79 mm)
Weight 9.5 oz (269 g)
Picatinny Slots T14 / B14 / L14 / R14
6061-T6 Aluminum

/MTU011

AK RECEIVER MOUNTS



UTG® ACCU-SYNC® QR SIDE MOUNT

Tool-free tension-adjustable quick release (QR) lever mount compatible with majority of side receiver rails.

Iron sight accessible channel.

US PAT. 11703308 | US PAT. D949276 | US PAT. D949277

Length 6.69" (170 mm)
Width 1.91" (48.5 mm)
Height 3.14" (80 mm)
Weight 5.4 oz (153 g)
Picatinny Slots 16
M-LOK® Slots 1 (Full) / 2 (Half)

/MT-UAK01



UTG PRO® QD SIDE MOUNT

Quick detachable lever mount.

Iron sight accessible channel.

6 slot removable side accessory rail.

Length 6.5" (165 mm)
Width 1.8" (46 mm)
Height 3.3" (84 mm)
Weight 6.2 oz (176 g)
Picatinny Slots 16

/MTU016



UTG® AK STEEL SIDE PLATE

Compatible with both milled and stamped receivers.

Permanent modification to receiver required, consulting gunsmith recommended.

Length 4.1" (104 mm)
Width 0.98" (24. 9 mm)
Height 0.25" (6.5 mm)
Weight 2.4 g (0.88 oz)

/TL-M47SR

AK MAGAZINE



STEEL Reinforced

UTG® AK/AKM WINDOWED POLYMER MAGAZINE

Steel rear locking lug and reinforced front lug and spine.

High visibility blue follower and stainless-steel spring.

Raised bosses for added grip retention

Windowed with round count indicators at 10, 15, 20, 25, and 30.

Removable flared floor plate for easy disassembly and maintenance.

US PAT. D849178

Length 2.5" (64 mm)
Width 1.26" (32 mm)
Height 9.13" (232 mm)
Weight 7 oz (198 g)

/RBT-AKM30



MICHIGAN MADE BILLET RECEIVERS


UTG Pro billet receiver sets are constructed from 7075-T6 aluminum finished in a matte black type III class 2 hard coat anodize. Receivers feature lightening cuts in applicable areas to reduce weight and influence the overall receiver aesthetics with more subtle ergonomic improvements, such as melted contours and dehorned corners, bridging together function and form.

DEFINED EXECUTION

Outside of the few included proprietary and patent-pending parts, namely our true ambidextrous bolt-catch and release, common parts compatibility remains intact with standard mil-spec and most aftermarket parts dropping right into our uppers and lowers. Commonly found threaded steel pins replace the per usual roll pins making for an easier time during assembly, parts swapping, general maintenance, and come included.

A captured buffer detent and rear takedown pin detent and spring design conveniently prevents the easily inadvertent launch of the buffer detent and bending of the rear takedown pin spring when installing or removing the receiver end plate and buffer tube assembly.

Our upper receiver is M4 feed ramp cut and features one additional Picatinny slot compared to what is standard for a total of 14 T-marked slots. Making all the difference for optic applications such as when running with a magnifier, rear sight, or both.

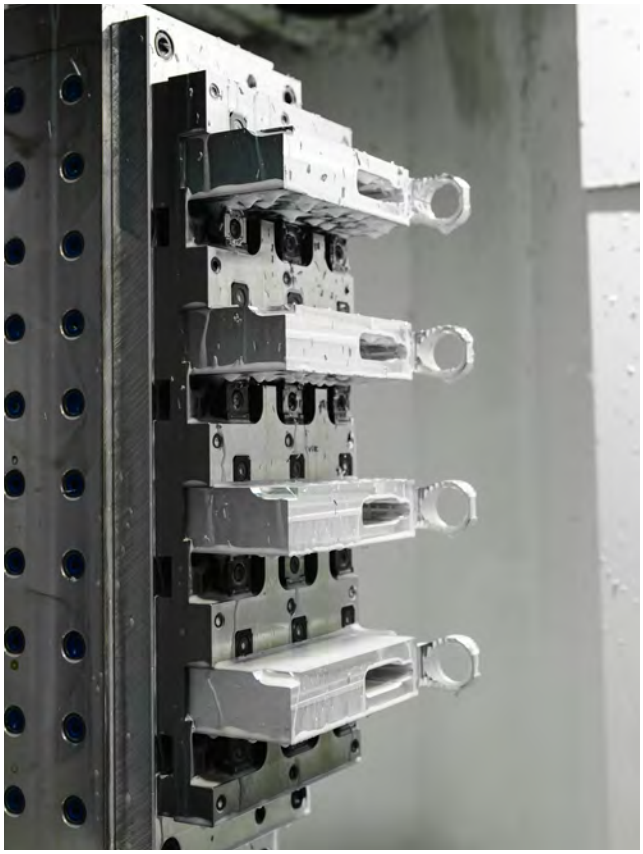

Whether preferring our standard or true ambidextrous lower receiver, both feature improvements in ergonomics to include three different trigger finger indexing points. A contoured cutout in the trigger guard for small hands, an extended shelf built into the magazine release fencing for medium hands, and a contoured sweep that transitions into the shelf of the magazine well's flaring for large hands. We hail from Michigan, so the integral trigger guard is winterized or in other words oversized for gloved use. That includes shooting gloves. A shortened height, but flared mag-well cleans up reloads and ensures compatibility with most if not all magazines and drums. UTG Pro lower receivers are all multi-caliber marked.



The UTG Pro AMBI lower receiver supplements not just a dominantly right or left-handed shooter, but a shooter that may find themselves having to shoot either handed depending upon their environment and situation. Whether in a professional, competitive, recreational, or rightful civilian capacity this is applicative to all of us.

From a battery of arms standpoint, our AMBI lower receiver is identical in manipulation on the left and right side of the receiver sans the forward assist. All controls from the right-side bolt catch and release to the left-side magazine release are where one expects them to be. Additionally, controls remain functionally like a standard mil-spec AR15. A paddle-style bolt-catch or a push-button magazine release remains as such and is immediately intuitive.

UTG PRO® AR15 BILLET RECEIVERS 7075-T6 Billet

TRUE AMBIDEXTROUS

True ambidextrous multi-caliber marked lower with left and right-side bolt catch, bolt release, and magazine release.
Mirrored battery of arms, manipulation of all ambi. controls are near identical in position and manipulation.
Oversized trigger guard and enlarged and flared magwell.
M4 feed ramp cut upper with forward assist and T-marked 14 slot Picatinny flat top.
Captured rear takedown pin and buffer detent assembly.
Threaded steel pins for bolt catch and forward assist.

UPPER /FUR001
AMBI LOWER ONLY /FLR002
AMBI RECEIVER SET /FCR02





STANDARD

Oversized trigger guard and enlarged and flared magwell.
M4 feed ramp cut upper with forward assist and T-marked 14 slot Picatinny flat top.
Multi-caliber marked lower with captured rear takedown pin and buffer detent assembly.
Threaded steel pins for bolt catch and forward assist.

UPPER /FUR001
LOWER ONLY /FLR001
RECEIVER SET /FCR01







INTEGRIX®

BREAKING THE BARRIER

INTRODUCING INTEGRIX®, THE NEW PREMIUM BRAND OF OPTICS FROM LEAPERS, INC.

Integrix was in development for over a decade before the release of its very first rifle scope in 2023. Our mission? To break the price barrier to high performance optics.

Manufacturing and engineering are integrated in-house: from proprietary optical and mechanical design, to manufacturing, assembly, testing and validation.

The result is high quality glass, at an unbeatable price. By owning our manufacturing end to end, we eliminate the middleman and pass that efficiency back to our customers.

Integrix closes the gap between the manufacturer and the customer. The same people who define the requirements make the scope. The engineering team manages the assembly line and conducts live fire testing. They hunt and compete alongside customers in the field to integrate shooter feedback and deliver a product with integrity.





THE INTEGRIX® STANDARD

WORLD-CLASS OPTOMECHANICAL DESIGN, DEVELOPED AND MADE IN-HOUSE.

The Integrix Standard delivers over 92% light transmission for best-in-class visibility across mirage and low light conditions. Optical designs are painstakingly engineered for a well-balanced image with edge-to-edge clarity and minimized aberrations. Demanding standards for HD image quality and brightness across higher magnifications where it matters most: no dimming of the target and immersive, uninterrupted surveillance.

Great design demands equally precise execution. All Integrix models are tested twice across our Taiwan and U.S. factories and verified in-house using world-class measurement and diagnostic equipment - from concentricity of the machining to the air gap between lenses, and the torque of a single click of the turret. Each model must pass collimator verification and live fire regimens before going to production. Performance is proven, not assumed: in the lab, at the range, and in the field.

INTEGRIX®

FEATURES



WIDE OPEN FOV

Wide field of view to maximize the information seen around your targets and the immediate environment.



OVER 92% LIGHT TRANSMISSION

Over 92% light transmission for maximum visibility and bright image across mirage and low light conditions.



PREMIUM GLASS MATERIAL

Premium multi-coated German SCHOTT and Japanese OHARA glass for high-definition image quality.



EDGE-TO-EDGE CLARITY & CONTRAST

Clear high-contrast picture on-axis and off-axis for uninterrupted surveillance from edge to edge.



CONSTANT EYE RELIEF

Constant comfortable eye box for easy target acquisition and full immersion from low to high magnifications.



PATENTED EASY-TO-USE ZERO STOP

Patented zero stop on mid to long range models, designed to be the easiest to reset on the market.



RED/GREEN ILLUMINATION

Red and green adjustable illumination with 12 hour auto shutoff.

RIGOROUS TESTING




EXTREME CLIMATE PROOF

20 hours of four corners environmental testing from -40°F to +160°F (-40°C to +70°C) at low and high humidity.



IP67 RATED PROTECTION

Dust-tight and water-resistant, capable of withstanding immersion in up to 1 meter of water for 30 minutes.



OPTIMIZED OPTICAL DESIGN

World-class optical design for minimized aberration and distortion across the color spectrum and FOV.



PRECISION TRACKING

Precise windage and elevation adjustments multi-validated across live fire, box testing, and collimator methods.



RETICLE ACCURACY

Precision etched reticles with double-validated dimensions for holdover and ranging accuracy.



.338 LAPUA MAGNUM RATED


Recoil endurance over 300+ rounds of .338 Lapua Magnum per sample, validated for zero retention every 100 rounds.



.30 CAL SPRINGER AIR GUN RATED

Recoil endurance over 300+ rounds through a Hatsan .30 Cal Carnivore for twice the validation.

RETICLES

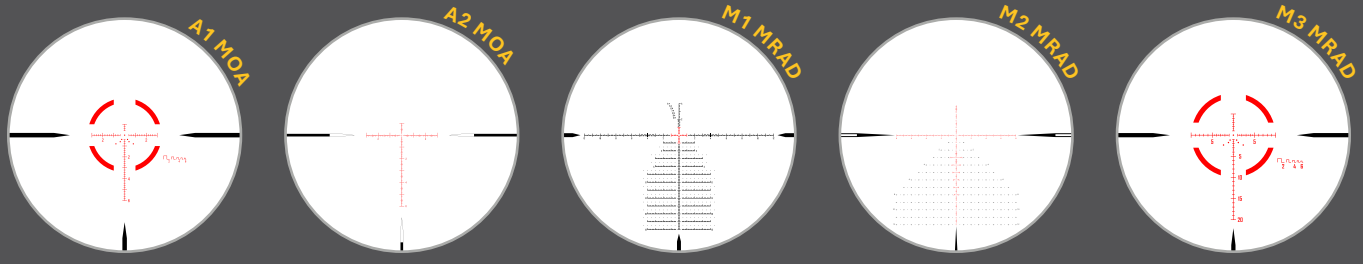

INTEGRIX® SCOPES

iX8 1-8X28 LPVO

Integrix iX8 1-8X28 delivers a 1X with the best image quality possible out to 8X for the perfect crossover. The finely optimized eyebox and FOV make close quarter engagements and target acquisition second nature.



First Focal Plane (FFP)
34 mm Tube
Length 10.91" (277 mm)
Weight 25.3 oz (716 g)
FOV 115.5'–14.1' @ 100 yds
FOV 38.5–4.7 m @ 100 m
Parallax Fixed @ 100 yds (91.4 m)
Elevation Adj. Range 111 MOA / 32.5 MRAD
Windage Adj. Range 52 MOA / 15 MRAD
Red / Green Illumination

A1 MOA /IX801FA1
M3 MRAD /IX801FM3

iX6 3-18X44 MID POWER

Integrix iX6 3-18X44 is an ultra-compact optic weighing just 29.7 ounces (841 grams). Whether hunting or building a DMR, this optimized optic is the preferred choice when agility and accuracy intersect.

US PAT. 12001007 | US PAT. D979005 | US PAT. D989909 | US PAT. D989910



First Focal Plane (FFP)
34 mm Tube
Length 11.89" (302 mm)
Weight 29.7 oz (841 g)
FOV 37.7'–6.3' @ 100 yds
FOV 12.6–2.1 m @ 100 m
Parallax 30 yds (27.4 m)–∞
Elevation Adj. Range 111 MOA / 32.5 MRAD
Windage Adj. Range 52 MOA / 15 MRAD
Red / Green Illumination
Zero Stop

A2 MOA /IX603FA2
M1 MRAD /IX603FM1

iX6 4.5-27X56 LR/ELR NEW

Integrix iX6 4.5-27X56 is purpose-built for competitive shooters and seasoned hunters who demand precision long-range. HD image clarity, minimized aberrations, and over 92% light transmission.

US PAT. 12001007 | US PAT. D979005 | US PAT. D989909 | US PAT. D989910 | US PAT. D1064165



First Focal Plane (FFP)
34 mm Tube
Length 14.13" (359 mm)
Weight 33.7 oz (956 g)
FOV 25.1'–4.2' @ 100 yds
FOV 8.4–1.4 m @ 100 m
Parallax 30 yds (27.4 m)–∞
Elevation Adj. Range 32.5 MRAD
Windage Adj. Range 14 MRAD
Red / Green Illumination
Zero Stop

M1 MRAD /IX645FM1
M2 MRAD /IX645FM2

iX6 6-36X56 LR/ELR NEW

Integrix iX6 6-36X56 offers 32.5 Mils of elevation and 14 Mils of windage travel with maximum FOV and image quality to dominate extreme long-range shooting. Parallax starts at 10 yds and reaches out to infinity.

US PAT. 12001007 | US PAT. D979005 | US PAT. D989909 | US PAT. D989910 | US PAT. D1064165



First Focal Plane (FFP)
34 mm Tube
Length 15.08" (383 mm)
Weight 39.5 oz (1121 g)
FOV 22.5'–3.9' @ 100 yds
FOV 7.5–1.3 m @ 100 m
Parallax 10 yds (9.14 m)–∞
Elevation Adj. Range 32.5 MRAD
Windage Adj. Range 14 MRAD
Red / Green Illumination
Zero Stop

M1 MRAD /IX606FM1
M2 MRAD /IX606FM2



INTEGRIX®

FUNDAMENTALS. DESIGNED TO WIN.

Developed in partnership with champion shooters Nick Till and James Fox, the Integrix iXF 4.5X28 Service Rifle scope launched in July 2025. The market has not seen a new launch from top performing brands in years, and Integrix is delivering upgrades to raise the level of Service Rifle competitions across the country.

A4 MOA: THE MARKSMAN'S APERTURE

The A4 reticle features a 0.875 MOA center dot and 2 aperture options: a 7 MOA or groundbreaking 6.5 MOA inner diameter. The smallest aperture available on the market, the A4 gives expert marksmen the ultimate edge.

PRECISION TURRETS

For maximum durability, internal pins and gears are steel-on-steel for precision clicks and the adjustment screw abutting the erector tube to adjust aim is made of brass. All precision-machined, quality checked, and dual-tested.

INDUSTRY-LEADING FIELD OF VIEW

The Integrix iXF 4.5X28 has industry-leading FOV in its category, pushing the capabilities of what a fixed 4.5X power scope can offer. Angular FOV sits at 5.72°, which at 4.5X power is 30 ft at 100 yards (10 m at 100 m).

THE INTEGRIX IMAGE STANDARD

Integrix delivers edge-to-edge image quality and over 92% light transmission for optimal visibility through mirage and low light conditions. Lenses are made using German SCHOTT and Japanese OHARA glass.

TESTED IN THE LAB AND IN THE FIELD

Tested in the field across conditions with Nick Till and James Fox, Integrix scopes are 3X Nitrogen-purged for fog, IP67 dustproof and waterproof and endure Four Corners environmental testing from -40°F to +160°F (-40°C to +70°C).

CUSTOM-MADE ACCESSORIES

Listening to shooter feedback, the first set of accessories available for sale include: the UTG Pro P.O.I 34mm Service Rifle Mount, direct-thread clear and tinted lens reducers and carbon fiber sunshades.

INTEGRIX® SERVICE RIFLE SCOPES






iXF 4.5X28 NEW

Second Focal Plane (SFP)
34 mm Tube
Length 9.06" (230 mm)
Weight 18.3 oz (520 g)
FOV 30' @ 100 yds
FOV 10 m @ 100 m
Parallax Fixed @ 200 yds (182.9 m)
Elevation Adj. Range 120 MOA
Windage Adj. Range 120 MOA
Red / Green Illumination
US PAT. 12305959

A4-7 MOA /IXF45SA4-7
A4-6.5 MOA /IXF45SA4-65

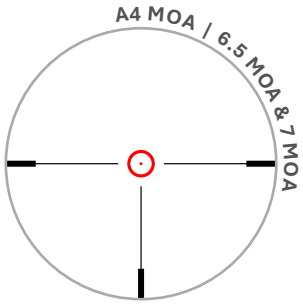

COMPATIBLE ACCESSORIES FOR SERVICE RIFLE SCOPES


INTEGRIX® CARBON FIBER SUNSHADE - 28MM NEW

Designed for Integrix iXF 4.5X28 34mm SFP service rifle scope.
Blocks unwanted light from hitting lens preventing lens flare and glare.
Physically protects lens from rain, dust, dirt, and other debris.
Threads directly to end of objective.
Durable and ultra lightweight carbon fiber construction.



Length 4" (101.6 mm)
Sunshade Length 3" (76.2 mm)
Outer Ø 1.57" (40 mm)
Weight 1.6 oz (45 g)
Aluminum, Carbon Fiber

OVERSIZED /IXSS01

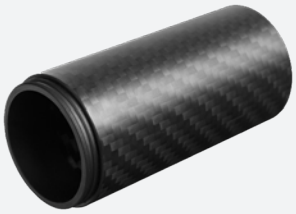

Length 3" (76.2 mm)
Sunshade Length 2.75" (69.85 mm)
Outer Ø 1.38" (35 mm)
Weight 0.9 oz (25.5 g)
Aluminum, Carbon Fiber

FLUSH /IXSS02

UTG PRO® P.O.I® SERVICE RIFLE MOUNT NEW

Patented locking plate with dual spring-loaded guide rods for repeatable zero.
1.35" center height and 3.7" offset tailored for Service Rifle competition.
Square Picatinny recoil stops for secure zero hold.
US PAT. D771218 | EU PAT. EP2761064-0001

Inner Ø 34 mm
Center Height 1.35" (34 mm)
Offset 3.7" (94 mm)
7075-T6 Aluminum

PICATINNY /RI34135C




INTEGRIX® LENS REDUCERS NEW

Designed for Integrix iXF 4.5X28 34mm SFP service rifle scope.
Precision-machined, centered aperture for use when aiming.
Enables shooters to center their eye behind the scope and rid parallax.
Matte black anodized aluminum ring directly threads (M47 X 0.5) to scope ocular end.
Remains compatible with Integrix polymer lens caps.
Clear and tinted non-opaque acrylic lens included.

Outer Ø 1.93" (49 mm)
Thickness 0.28" (7.1 mm)
Aperture 0.15" (3.9 mm)
Weight 0.4 oz (11 g)

/IXLR01





ACCUSHOT PRO™

Derived from high-performance Integrix DNA, Accushot Pro is the natural progression of legacy UTG optics loved by plinkers and hunters alike. The smart choice for sportsmen looking to level up their performance and invest in their equipment, from tactical competition to cross-disciplinary hunting.


ACCUSHOT PRO™ SCOPES

AS6 1-6X24 LPVO NEW

The compact AS6 1-6X24 LPVO runs from a 1X to 6X for quick, comfortable target acquisition even at maximum magnification. Suitable for your AR, AK, or general purpose rifle.

First Focal Plane (FFP)
34 mm Tube
Length 10.12" (257 mm)
Weight 23.8 oz (676 g)
FOV 115.5'–18.9' @ 100 yds
FOV 38.5–6.3 m @ 100 m
Parallax Fixed @ 100 yds (91.4 m)
Elevation Adj. Range 111 MOA
Windage Adj. Range 52 MOA
Red / Green Illumination

A1 MOA /AS601FA1

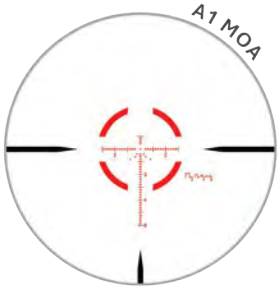



UTG® SCOPES

BUG BUSTER®

3-9X32

Second Focal Plane (SFP)
1" Tube
Length 8.11" (206 mm)
Weight 14 oz (397 g)
Parallax 3 yds (2.74 m)–∞
Red/Green Illumination
US PAT. 8397421

WIRE MIL-DOT /SCP-M392AOLWQ



3-12X32

Second Focal Plane (SFP)
1" Tube
Length 8.07" (205 mm)
Weight 12.7 oz (360 g)
Parallax 3 yds (2.74 m)–∞
Non-Illumined

WIRE MIL-DOT /SCP-M312AOWQ | Picatinny
WIRE MIL-DOT /SCP-M312AOD | Dovetail



OP3

3-12X44

Second Focal Plane (SFP)
30 mm Tube
Length 10.12" (257 mm)
Weight 20.7 oz (587 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894

UMOA /OP3-GM3124UMOA



4-16X44

Second Focal Plane (SFP)
30 mm Tube
Length 10.67" (271 mm)
Weight 21.4 oz (607 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination

UMOA /OP3-GM4164UMOA



SCP3

1-8X28

Second Focal Plane (SFP)
30 mm Tube
Length 9.80" (249 mm)
Weight 18 oz (510 g)
Parallax Fixed @ 100 yds (91.4 m)
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894

BG4 /SCP3-18IEBG4



3-12X44

Second Focal Plane (SFP)
30 mm Tube
Length 10.04" (255 mm)
Weight 23.2 oz (658 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894

WIRE MIL-DOT /SCP3-UM312AOIEW



4-16X44

Second Focal Plane (SFP)
30 mm Tube
Length 10.63" (270 mm)
Weight 21.8 oz (618 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8397421 | US PAT. 8437079 | EU PAT. EP2520894

WIRE MIL-DOT /SCP3-UM416AOIEW




4-16X44


Second Focal Plane (SFP)
30 mm Tube
Length 14.37" (365 mm)
Weight 23.4 oz (663 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894


WIRE MIL-DOT /SCP3-U416AOIEW



RETICLES







COMPATIBLE ACCESSORIES

RUBBER SCOPE EYESHADE

Fits scope with approximately 3" eye relief. Adaptor kit includes 3 inserts of varying thickness to fit scopes with eyepiece diameter of 36 mm, 40 mm, 41.5 mm, or 43 mm.
/SCP-ES403



PARALLAX INDEX WHEEL

60 MM / SCP3 SCOPES /SCP-SW060B
80 MM / SCP3 SCOPES /SCP-SW080B
80 MM / OP3 SCOPES /OP3-SW080



UTG® SCOPES

TRUE HUNTER®

4-16X40

Second Focal Plane (SFP)
1" Tube
Length 14.65" (372 mm)
Weight 22.3 oz (632 g)
Parallax 5 yds (4.57 m)–∞
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894

WIRE MIL-DOT /SCP-U4164AOIEW



6-24X50

Second Focal Plane (SFP)
1" Tube
Length 15.28" (388 mm)
Weight 26.5 oz (751 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8397421 | US PAT. 8437079 | EU PAT. EP2520894

WIRE MIL-DOT /SCP-U6245AOIEW



CROSSBOW

1.5-6X36 OP3

Second Focal Plane (SFP)
30 mm Tube
Length 8.31" (211 mm)
Weight 16 oz (454 g)
Parallax 10 yds (9.14 m)–∞
Red/Green Illumination

130 HUNTER BDC /OP3-G1563CRWQ



4X32 True Hunter®

Second Focal Plane (SFP)
1" Tube
Length 7.72" (196 mm)
Weight 12.3 oz (349 g)
Parallax Fixed @ 50 yds (45.7 m)
Red/Green Illumination
US PAT. 8397421

PRO 5-STEP /SCP-M4CR5WQ



LONG EYE RELIEF

2-7X44 Scout Rifle Scope

Second Focal Plane (SFP)
30 mm Tube
Length 10.87" (276 mm)
Weight 25.4 oz (720 g)
Parallax 10 yds (9.14 m)–∞
IE® 36-Color Illumination
US PAT. 8437079 | EU PAT. EP2520894

ETCHED GLASS MIL-DOT /SCP3-274LAOIEW




2-7X32 True Hunter® Handgun Scope


Second Focal Plane (SFP)
1" Tube
Length 9.37" (238 mm)
Weight 14 oz (397 g)
Parallax Fixed @ 35 yds (32 m)
Red/Green Illumination


PDC /SCP-27PRGW





RETICLES












DIMENSIONS

A. Overall Length
B. Total Mounting Space
C. Front Mounting Space
D. Rear Mounting Space
E. Ocular Tube Length
F. Objective Tube Length
G. Objective Diameter
H. Eyepiece Diameter
I. Sunshade Offset Length
K. Tube Diameter

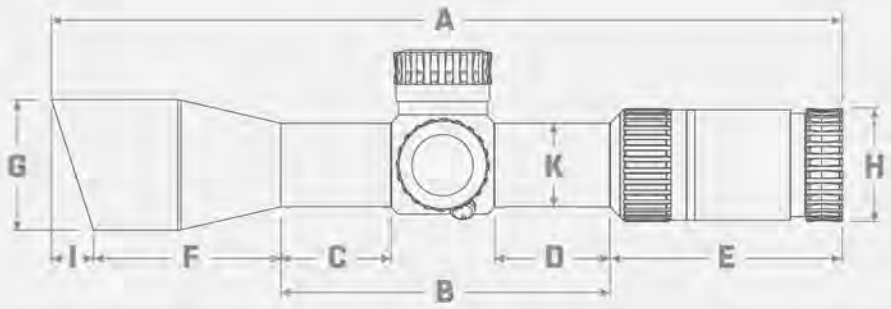

	INTEGRIX IX8 LPVO	INTEGRIX IX6 MID POWER	INTEGRIX IX6 LR/ELR		INTEGRIX IXF SERVICE RIFLE
	IX8 1-8X28	IX6 3-18X44	IX6 4.5-27X56	IX6 6-36X56	IXF 4.5X28
A	10.91" (277 mm)	11.89" (302 mm)	14.13" (359 mm)	15.08" (383 mm)	9.06" (230 mm)
B	6.46" (164 mm)	5.28" (134 mm)	5.71" (145 mm)	6.22" (158 mm)	4.92" (125 mm)
C	2.17" (55 mm)	1.77" (45 mm)	1.97" (50 mm)	2.20" (56 mm)	1.97" (50 mm)
D	2.64" (67 mm)	1.85" (47 mm)	1.97" (50 mm)	2.20" (56 mm)	1.38" (35 mm)
E	3.39" (86 mm)	3.46" (88 mm)	3.46" (88 mm)	3.74" (95 mm)	2.95" (75 mm)
F	1.06" (27 mm)	3.15" (80 mm)	4.96" (126 mm)	5.12" (130 mm)	1.18" (30 mm)
G	1.38" (35 mm)	2.09" (53 mm)	2.56" (65 mm)	2.56" (65 mm)	1.38" (35 mm)
H	1.81" (46 mm)	1.81" (46 mm)	1.81" (46 mm)	1.89" (48 mm)	1.85" (47 mm)
K	1.34" (34 mm)	1.34" (34 mm)	1.34" (34 mm)	1.34" (34 mm)	1.34" (34 mm)

	ACCUSHOT PRO™ AS6 LPVO
	AS6 1-6X24
A	10.12" (257 mm)
B	6.65" (169 mm)
C	3.39" (86 mm)
D	1.65" (42 mm)
E	3.46" (88 mm)
F	0
G	1.34" (34 mm)
H	1.77" (45 mm)
K	1.34" (34 mm)

	UTG® BUG BUSTER®		UTG® OP3		UTG® SCP3			
	SCP-M392AOLWQ	SCP-M312AOWQ SCP-M312AOD	OP3-GM3124UMOA	OP3-GM4164UMOA	SCP3-18IEBG4	SCP3-UM312AOIEW	SCP3-UM416AOIEW	SCP3-U416AOIEW
A	8.11" (206 mm)	8.07" (205 mm)	10.12" (257 mm)	10.67" (271 mm)	9.80" (249mm)	10.04" (255 mm)	10.63" (270 mm)	14.37" (365 mm)
B	3.35" (85 mm)	3.70" (94 mm)	4.02" (102 mm)	4.25" (108 mm)	4.53" (115 mm)	4.02" (102 mm)	4.41" (112 mm)	6.77" (172 mm)
C	1.06" (27 mm)	1.34" (34 mm)	1.26" (32 mm)	1.38" (35 mm)	1.61" (41 mm)	1.32" (33.5 mm)	1.57" (40 mm)	2.95" (75 mm)
D	1.06" (27 mm)	1.20" (30.5 mm)	1.18" (30 mm)	1.38" (35 mm)	1.61" (41 mm)	1.40" (35.5 mm)	1.54" (39 mm)	2.44" (62 mm)
E	2.24" (57 mm)	2.24" (57 mm)	3.07" (78 mm)	3.07" (78 mm)	3.82" (97 mm)	2.91" (74 mm)	3.15" (80 mm)	3.86" (98 mm)
F	2.52" (64 mm)	2.13" (54 mm)	3.03" (77 mm)	3.35" (85 mm)	1.46" (37 mm)	3.11" (79 mm)	3.07" (78 mm)	3.74" (95 mm)
G	1.77" (45 mm)	1.54" (39 mm)	2.09" (53 mm)	2.09" (53 mm)	1.38" (35 mm)	2.09" (53 mm)	2.13" (54 mm)	2.09" (53 mm)
H	1.54" (39 mm)	1.54" (39 mm)	1.57" (40 mm)	1.57" (40 mm)	1.61" (41 mm)	1.57" (40 mm)	1.57" (40 mm)	1.69" (43 mm)
I	0	0	0	0	0.43" (11 mm)	0.55" (14 mm)	0.59" (15 mm)	0.98" (25 mm)
K	1.00" (25.4 mm)	1.00" (25.4 mm)	1.18" (30 mm)	1.18" (30 mm)	1.18" (30 mm)	1.18" (30 mm)	1.18" (30 mm)	1.18" (30 mm)

	UTG® TRUE HUNTER		UTG® CROSSBOW		UTG® LONG EYE RELIEF	
	SCP-U4164AOIEW	SCP-U6245AOIEW	OP3-G1563CRWQ	SCP-M4CR5WQ	SCP3-274LAOIEW	SCP-27PRGW
A	14.65" (372 mm)	15.28" (388 mm)	8.31" (211 mm)	7.72" (196 mm)	10.87" (276 mm)	9.37" (238 mm)
B	6.02" (153 mm)	6.50" (165 mm)	3.50" (89 mm)	3.54" (90 mm)	4.06" (103 mm)	3.66" (93 mm)
C	2.28" (58 mm)	2.64" (67 mm)	1.16" (29.5 mm)	1.18" (30 mm)	1.34" (34 mm)	1.30" (33 mm)
D	2.44" (62 mm)	2.64" (67 mm)	1.08" (27.5 mm)	1.18" (30 mm)	1.42" (36 mm)	1.22" (31 mm)
E	3.66" (93 mm)	3.66" (93 mm)	2.91" (74 mm)	2.05" (52 mm)	3.82" (97 mm)	3.35" (85 mm)
F	4.96" (126 mm)	5.12" (130 mm)	1.89" (48 mm)	2.13" (54 mm)	2.99" (76 mm)	2.36" (60 mm)
G	2.05" (52 mm)	2.36" (60 mm)	1.73" (44 mm)	1.65" (42 mm)	2.09" (53 mm)	1.56" (39.5 mm)
H	1.61" (41 mm)	1.61" (41 mm)	1.71" (43.5 mm)	1.50" (38 mm)	1.83" (46.5 mm)	1.71" (43.5 mm)
I	0	0	0	0.39" (10 mm)	0.55" (14 mm)	0
K	1.00" (25.4 mm)	1.00" (25.4 mm)	1.18" (30 mm)	1.00" (25.4 mm)	1.18" (30 mm)	1.00" (25.4 mm)

SCOPE SPECIFICATIONS

	INTEGRIX® iX8 LPVO		INTEGRIX® iX6 MID POWER		INTEGRIX® iX6 LR/ELR				INTEGRIX® iXF SERVICE RIFLE		ACCUSHOT PRO™ AS6 LPVO
	iX801FA1	iX801FM3	iX603FA2	iX603FM1	iX645FM1	iX645FM2	iX606FM1	iX606FM2	iXF45SA4-65	iXF45SA4-7	AS601FA1
Magnification x Objective Lens Dia.	1–8X28		3-18X44		4.5-27X56		6-36X56		4.5X28		1-6X24
Focal Plane	First Focal Plane (FFP)		First Focal Plane (FFP)		First Focal Plane (FFP)				Second Focal Plane (SFP)		First Focal Plane (FFP)
Reticle	A1 MOA	M3 MRAD	A2 MOA	M1 MRAD	M1 MRAD	M2 MRAD	M1 MRAD	M2 MRAD	A4 6.5 MOA	A4 7 MOA	A1 MOA
Tube Dia.	34 mm		34 mm		34 mm				34 mm		34 mm
Eye Relief	3.74" (95 mm)		3.94" (100 mm)		3.94" (100 mm)		3.54" (90 mm)		3.7" (94 mm)		3.54" (90 mm)
Exit Pupil	10–3.5 mm		11–2.5 mm		11–2.1 mm		9.2–1.6 mm		6.2 mm		9.5–4 mm
Linear FOV @ 100 yds	115.5'–14.1'		37.7'–6.3'		25.1'–4.2'		22.5'–3.9'		30'		115.5'–18.9'
Linear FOV @ 100 m	38.5–4.7 m		12.6 m - 2.1 m		8.4–1.4 m		7.5–1.3 m		10 m		38.5 - 6.3 m
Angular FOV	21.8°–2.7°		7.2°–1.2°		4.8°–0.8°		4.3°–0.7°		5.72°		21.8°–3.6°
Light Transmission	92%		92%		92%				92%		90%
Elevation Travel	111 MOA (U 65 MOA, D 46 MOA)	32.5 MRAD (U 19 MRAD, D 13.5 MRAD)	111 MOA (U 65 MOA, D 46 MOA)	32.5 MRAD (U 19 MRAD, D 13.5 MRAD)	32.5 MRAD (U 19 MRAD, D 13.5 MRAD)				120 MOA (U 60 MOA, D 60 MOA)		111 MOA (U 65 MOA, D 46 MOA)
Windage Travel	52 MOA	15 MRAD	52 MOA	15 MRAD	14 MRAD				120 MOA		52 MOA
Travel Per Revolution	50 MOA	10 MRAD	24 MOA	10 MRAD	10 MRAD				24 MOA		40 MOA
Click Value	1/2 MOA	0.1 MRAD	1/4 MOA	0.1 MRAD	0.1 MRAD				1/4 MOA		1/2 MOA
Turret Type	Push-Pull Lockable		Push-Pull Lockable, Zero Stop		Push-Pull Lockable, Zero Stop				Adjustable		Push-Pull Lockable, Zero Stop
Diopter	-3D to +2D		-3D to +2D		-3D to +2D				-3D to +2D		-3D to +2D
Parallax	Fixed @ 100 yds (91.4 m)		30 yds (27.4 m)–∞		30 yds (27.4 m)–∞		10 yds (9.14 m)–∞		Fixed @ 200 yds (182.9 m)		Fixed @ 100 yds (91.4 m)
Weight	25.3 oz (716 g)		29.7 oz (841 g)		33.7 oz (956 g)		39.5 oz (1121 g)		18.3 oz (520 g)		23.8 oz (676 g)
Caliber Rating	.338 Lapua Magnum		.338 Lapua Magnum		.338 Lapua Magnum				.338 Lapua Magnum		.338 Lapua Magnum
IP Rating	IP67		IP67		IP67				IP67		IP67
Fogproof	Nitrogen Gas Purged		Nitrogen Gas Purged		Nitrogen Gas Purged				Nitrogen Gas Purged		Nitrogen Gas Purged
Functional Temperature	-40°F to +160°F (-40°C to +70°C)		-40°F to +160°F (-40°C to +70°C)		-40°F to +160°F (-40°C to +70°C)				-40°F to +160°F (-40°C to +70°C)		-40°F to +160°F (-40°C to +70°C)
Illumination	Red / Green (10 Settings Each)		Red / Green (8 Settings Each)		Red / Green (8 Settings Each)				Red / Green (8 Settings Each)		Red / Green (10 Settings Each)
Battery	CR2032 3V		CR2032 3V		CR2032 3V				CR2032 3V		CR2032 3V

	UTG® BUG BUSTER®			UTG® OP3		UTG® SCP3			
	SCP-M392AOLWQ	SCP-M312AOWQ	SCP-M312AOD	OP3-GM3124UMOA	OP3-GM4164UMOA	SCP3-18IEBG4	SCP3-UM312AOIEW	SCP3-UM416AOIEW	SCP3-U416AOIEW
Magnification x Objective Lens Dia.	3-9X32	3-12X32		3-12X44	4-16X44	1-8X28	3-12X44	4-16X44	
Focal Plane	Second Focal Plane (SFP)			Second Focal Plane (SFP)		Second Focal Plane (SFP)			
Reticle	Wire Mil-Dot			Etched Glass UMOA		Etched Glass BG4	Wire Mil-Dot		
Tube Dia.	1"			30 mm		30 mm			
Eye Relief	3.2" (81 mm)	3.3" (84 mm)		3.54" (90 mm)	3.23" (82 mm)	3.35" (85 mm)	3.0" (76 mm)	3.0" (76 mm)	3.0" (76 mm)
Exit Pupil	10.6–3.6 mm	10.6–2.7 mm		14.7–4.5 mm	11–3 mm	26.5–3.4 mm	13–3.9 mm	11–2.8 mm	10.2–2.8 mm
Linear FOV @ 100 yds	37.7'–14'	31'–10'		32'–10'	26.2'–7.85'	99.5'–13'	32'–10'	26.2'–7.85'	24.4'–6.8'
Linear FOV @ 100 m	12.6–4.7m	10.3–3.1m		10.7–3.3m	8.7–2.6m	33.1–4.4m	10.7–3.3m	8.7–2.6m	8.2–2.3m
Angular FOV	7.2°–2.7°	5.9°–1.9°		6.1°–1.9°	5°–1.5°	18.8°–2.5°	6.1°–1.9°	5°–1.5°	4.7°–1.3°
Elevation Travel	60 MOA (U 30 MOA, D 30 MOA)			80 MOA (U 40 MOA, D 40 MOA)		80 MOA (U 40 MOA, D 40 MOA)			
Windage Travel	60 MOA	60 MOA		80 MOA		80 MOA			
Travel Per Revolution	18 MOA	24 MOA		26 MOA		30 MOA	18 MOA		
Click Value	1/4 MOA	1/4 MOA		1/4 MOA		1/4 MOA			
Diopter	-2D to +2D			-2D to +2D		-2D to +2D			
Parallax	3 yds (2.74 m)–∞			10 yds (9.14 m)–∞		Fixed @ 100 yds (91.4 m)	10 yds (9.14 m)–∞		
Weight	14 oz (397 g)	12.7 oz (360 g)		20.7 oz (587 g)	21.4 oz (607 g)	18 oz (510 g)	23.2 oz (658 g)	21.8 oz (618 g)	23.4 oz (663 g)
Illumination	Red / Green	Non-Illuminated		IE® 36-Color		IE® 36-Color			
Battery	CR1620 3V	-		CR2032 3V		CR2032 3V			
Rings Included	RQ2W1154 Picatinny/Med.		RT2D1154 Dovetail/Med.	RG2W3154 Picatinny/Med.		AIR32234 Picatinny/High	RG2W3154 Picatinny/Med.		

	UTG® TRUE HUNTER®		UTG® CROSSBOW		UTG® LONG EYERELIEF	
	SCP-U4164AOIEW	SCP-U6245AOIEW	OP3-G1563CRWQ	SCP-M4CR5WQ	SCP3-274LAOIEW	SCP-27PRGW
Magnification x Objective Lens Dia.	4-16X40	6-24X50	1.5-6X36	4X32	2-7X44	2-7X32
Focal Plane	Second Focal Plane (SFP)		Second Focal Plane (SFP)		Second Focal Plane (SFP)	
Reticle	Wire Mil-Dot		Etched Glass 130 Hunter BDC	Wire PRO 5-Step	Etched Glass Mil-Dot	Wire PDC
Tube Dia.	1"		30 mm	1"	30 mm	1"
Eye Relief	3" (76 mm)		4.35" (108 mm)	3.8" (97 mm)	9.5" (241 mm)	3.8" (351 mm)
Exit Pupil	10–2.5 mm	8.3–2.2 mm	24–6.2 mm	8 mm	22–6.3 mm	16–5 mm
Linear FOV @ 100 yds	23'–6'	14.4'–4.1'	52.5'–13.98'	27.2'	32'–10'	19.2'–7'
Linear FOV @ 100 m	7.7–1.9 m	4.7–1.4 m	17.5–4.7 m	9.1 m	10.5–3.1 m	4.4–2.3 m
Angular FOV	4.4°–1.1°	2.7°–0.8°	10°–2.7°	5.2°	6°–1.9°	2.5°–1.3°
Elevation Travel	60 MOA (U 30 MOA, D 30 MOA)		80 MOA (U 40 MOA, D 40 MOA)	60 MOA (U 30 MOA, D 30 MOA)	80 MOA (U 40 MOA, D 40 MOA)	60 MOA (U 30 MOA, D 30 MOA)
Windage Travel	60 MOA		80 MOA	60 MOA	80 MOA	60 MOA
Travel Per Revolution	15 MOA		36 MOA	20 MOA	18 MOA	15 MOA
Click Value	1/4 MOA		1/4 MOA	1/4 MOA	1/4 MOA	
Diopter	-2D to +2D		-2D to +2D		-2D to +2D	
Parallax	5 yds (4.57 m)–∞	10 yds (9.14 m)–∞	10 yds (9.14 m)–∞	Fixed @ 50 yds (45.7 m)	10 yds (9.14 m)–∞	Fixed @ 35 yds (32 m)
Weight	22.3 oz (632 g)	26.5 oz (751 g)	16 oz (454 g)	12.3 oz (349 g)	25.4 oz (720 g)	14 oz (397 g)
Illumination	IE® 36-Color		Red / Green		IE® 36-Color	Red / Green
Battery	CR2032 3V		CR1632 3V	CR1620 3V	CR2032 3V	CR1620 3V
Rings Included	RGWM-25H4 Picatinny/High	RQ2W1204 Picatinny/High	RG2W3154 Picatinny/Med.	RQ2W1104 Picatinny/Low	RG2W3154 Picatinny/Med.	RGWM-25M4 Picatinny/Med.



UTG® ACCU-SYNC® DOT SIGHTS

RED 3 MOA DOT | QUICK DETACHABLE | MANUAL BRIGHTNESS | 6061-T6 ALUMINUM | IPX7 WATERPROOF

Includes Quick Release (QR) low mount and lower 1/3 co-witness riser.
Compatible with Mini ACOG® footprint.

2.24" LENGTH

Lens Ø 0.71" (18 mm)
Length 2.24" (57 mm)
Width 1.50" (38 mm)
Center Height 0.89" (25.4 mm) with Low Mount / 1.62" (41 mm) with Riser
Weight 4.87 oz (138 g) with Low Mount | 5.54 oz (157 g) with Riser
8 Brightness Settings
Battery Life 30,000 hrs
Battery Type CR2032 3V

RED /OP-DS2018R

2.66" LENGTH

Lens Ø 0.79" (20 mm)
Length 2.66" (67.5 mm)
Width 1.67" (42.35 mm)
Center Height 1" (25.4 mm) with Low Mount / 1.54" (39.1 mm) with Riser
Weight 4.87 oz (138 g) with Low Mount | 5.54 oz (157 g) with Riser
8 Brightness Settings
Battery Life 30,000 hrs
Battery Type CR2032 3V

RED /OP-DS2521R



UTG® OP3 MICRO MRDS

SINGLE DOT RETICLE | GLASS LENS | 6061-T6 ALUMINUM | IPX7 WATERPROOF



OP3 MINI MICRO

RED 3 MOA DOT | CONSTANT-ON AUTOMATIC BRIGHTNESS

FOR SHIELD RMSC FOOTPRINT

Window Size 0.85" x 0.59" (23 x 15 mm)
Length 1.60" (41 mm)
Width 0.94" (24 mm)
Height 0.89" (22.55 mm)
Weight 0.7 oz (20 g)
Battery Life 30,000+ hrs
Battery Type CR2032 3V

RED /OT-RDM16R



OP3 MICRO

4 MOA DOT | MANUAL BRIGHTNESS | CO-WITNESS WITH MOST SUPPRESSOR HEIGHT IRON SIGHTS

FOR DOCTER®/VENOM®/NOBLEX® FOOTPRINT

Low Profile Picatinny Mount Included
Window Size 0.9" x 0.65" (23 x 16.5 mm)
Length 1.9" (48.25 mm)
Width 1.14" (29 mm)
Height 1.03" (26.15 mm)
Weight 1.2 oz (35 g)
1 MOA per Click
8 Brightness Settings
Battery Life 55,000+ hrs (Red) / 20,000+ hrs (Green)
Battery Type CR2032 3V

RED /OP-RDM20R
GREEN /OP-RDM20G

FOR RMR® FOOTPRINT

Low Profile Picatinny Mount Included
Window Size 0.9" x 0.65" (23 x 16.5 mm)
Length 1.9" (48.25 mm)
Width 1.14" (29 mm)
Height 1.03" (26.15 mm)
Weight 1.27 oz (35 g)
1 MOA per Click
8 Brightness Settings
Battery Life 55,000+ hrs
Battery Type CR2032 3V

RED /OP-RMR20R



OP3 MICRO SL/SLS

RED 3 MOA DOT | CO-WITNESS WITH MOST SUPPRESSOR HEIGHT IRON SIGHTS | SIDE LOADING BATTERY

FOR DOCTER®/VENOM®/NOBLEX® FOOTPRINT

Low Profile Picatinny Mount Included
Window Size 0.9" x 0.65" (23 x 16.5 mm)
Length 1.9" (48.25 mm)
Width 1.33" (33.8 mm)
Height 1.03" (26.15 mm)
Weight 1.3 oz (37 g)
1 MOA per Click
8 Brightness Settings
Battery Life 15,000 hrs
Battery Type CR1632 3V

MANUAL BRIGHTNESS /OP-RDM20CT
MANUAL & AUTOMATIC BRIGHTNESS /OP-RDM20CTS

FOR RMR® FOOTPRINT

Low Profile Picatinny Mount Included
Window Size 0.9" x 0.65" (23 x 16.5 mm)
Length 1.9" (48.25 mm)
Width 1.33" (33.8 mm)
Height 1.03" (26.15 mm)
Weight 1.3 oz (37 g)
1 MOA per Click
8 Brightness Settings
Battery Life 15,000 hrs
Battery Type CR1632 3V

MANUAL & AUTOMATIC BRIGHTNESS /OP-RMR20CTS

UTG® ITA DOT SIGHTS

INSTANT TARGET ACQUISITION | RED/GREEN ILLUMINATION | 6061-T6 ALUMINUM | PICATINNY



6" LENGTH

Bidirectional Lower 1/3 QD Mount
Center Height 1.65" (42 mm)
Weight 13.1 oz (371 g)
1/2 MOA Per Click
Battery Type CR1620 3V
US PAT. 8397421

T-DOT /SCP-TDTDQ



4.2" LENGTH

Lower 1/3 Adjustable Offset QD Mount
Center Height 1.26" (32 mm) / 1.65" (42 mm) w/Riser
Weight 8.7 oz (247 g)
1/2 MOA Per Click
Battery Type CR1620 3V
US PAT. 8397421

SINGLE DOT /SCP-DS3840W

T-DOT /SCP-DS3840TDQ



3.9" LENGTH

Lower 1/3 Adjustable Offset QD Mount
Center Height 1.18" (30 mm) / 1.57" (40 mm) w/Riser
Weight 8.3 oz (235 g)
1/2 MOA Per Click
Battery Type CR1620 3V
US PAT. 8397421

SINGLE DOT /SCP-DS3039W



3.8" LENGTH

Integral Thumb Nut Mount
Center Height 1" (25.5 mm)
Weight 9.4 oz (266 g)
1/2 MOA Per Click
Battery Type CR2032 3V

SINGLE DOT /SCP-RD40RGW-A



3.8" LENGTH

Integral QD Mount
Center Height 1" (25.5 mm)
Weight 8.4 oz (238 g)
1/2 MOA Per Click
Battery Type CR2032 3V
US PAT. 8397421

CIRCLE DOT /SCP-RG40CDQ





2.6" LENGTH


Integral QD Mount
Center Height 1" (25 mm)
Weight 4.9 oz (139 g)
1/2 MOA Per Click
Battery Type CR1620 3V
US PAT. 8397421

SINGLE DOT /SCP-DS3026W

RETICLES







UTG® 3X QD FLIP-TO-SIDE MAGNIFIER

Objective Ø 1" (25.4 mm)
Length 4.3" (109 mm)
Center Height 1.65" (42 mm)
Weight 11.8 oz (306 g)
Eye Relief 2 mm
Field of View 45' @ 100 yds
Perfect Match with: SCP-DS3840W, SCP-DS3039W, SCP-DS3840TDQ
Match with 0.60" Riser: SCP-RD40RGW-A
Match with 0.75" Riser: SCP-RG40CDQ
US PAT. 8397421 | US PAT. D672839 | EU PAT. EP1984576-0001

3X MAGNIFIER /SCP-MF3WEQS





UTG PRO® P.O.I® SCOPE MOUNTS

Proudly made in USA, UTG Pro P.O.I rings boast a patented steel locking interface controlled by dual spring-loaded guide rods for easy and solid installation. Top and bottom rings are precision-cut from a single piece of 6061-T6 Aluminum using Palletec-automated Mazak HCN4000 horizontal milling machines. By machining the top ring, bottom ring, and Picatinny interface in one operation centricity is guaranteed for your optic and your rail. No compromise on the most important tolerances and priced affordably out of Livonia, Michigan.

UTG® ACCU-SYNC® CANTILEVER MOUNTS

UTG Accu-Sync Cantilever mounts are a staple for any tactical build and available across 1 inch, 30 mm and 34 mm sizes at a multitude of heights and offsets. The base torx screw-locking model features lightening cuts for weight savings and is a historical best seller. The Quick Release option includes tool-free adjustment, lockable levers, and saloon-style locking direction to minimize snag. MOA compensation also available across 20, 30, and 40 MOA angles.

UTG PRO® P.O.I® SCOPE MOUNTS

TORX SCREW LOCKING MOUNT | PATENTED P.O.I LOCKING PLATE WITH DUAL SPRING-LOADED GUIDE RODS **.50 BMG** Rated



CANTILEVER MOUNT NEW 7075-T6 Aluminum

Patented locking plate with dual spring-loaded guide rods for repeatable zero.
1.35" center height and 3.7" offset tailored for Service Rifle competition.
Square Picatinny recoil stops for secure zero hold.
US PAT. D771218 | EU PAT. EP2761064-0001

34 MM Ø | Picatinny
Center Height 1.35" (34 mm)
Offset 3.7" (94 mm)

SERVICE RIFLE /RI34135C (ADDITIONAL SKUS COMING SOON)



2-PIECE RINGS

EU PAT. EP2691725-0001 | EU PAT. EP2761064-0001 | US PAT. D771218

1" Ø | Picatinny
Center Height 0.91" (23 mm)
/RWU012510
Center Height 1.1" (28 mm)
/RWU012515
Center Height 1.3" (33 mm)
/RWU012520

30 MM Ø | Picatinny
Center Height 0.98" (25 mm)
/RWU013010
Center Height 1.18" (30 mm)
/RWU013015
Center Height 1.46" (37 mm)
/RWU013022

34 MM Ø | Picatinny
Center Height 1" (25 mm)
/RWU013408
Center Height 1.26" (32 mm)
/RWU013415
Center Height 1.46" (37 mm)
/RWU013420

1" Ø | Dovetail
Center Height 1.1" (28 mm)
/RDU012515
Center Height 1.3" (33 mm)
/RDU012520

30 MM Ø | Dovetail
Center Height 0.98" (25 mm)
/RDU013010
Center Height 1.18" (30 mm)
/RDU013015
Center Height 1.46" (37 mm)
/RDU013022

UTG® ACCU-SYNC® CANTILEVER MOUNTS

TORX SCREW LOCKING MOUNT | 6061-T6 ALUMINUM | PICATINNY **.338 LAPUA MAGNUM** Rated

1" Ø
Center Height 1.22" (31 mm) | Offset 1.34" (34 mm)
/AIR11834
Center Height 1.22" (31 mm) | Offset 1.97" (50 mm)
/AIR11850
Center Height 1.38" (35 mm) | Offset 1.34" (34 mm)
/AIR12234
Center Height 1.38" (35 mm) | Offset 1.97" (50 mm)
/AIR12250

30 MM Ø
Center Height 1.3" (33 mm) | Offset 1.34" (34 mm)
/AIR31834
Center Height 1.3" (33 mm) | Offset 1.97" (50 mm)
/AIR31850
Center Height 1.46" (37 mm) | Offset 1.34" (34 mm)
/AIR32234
Center Height 1.46"(37 mm) | Offset 1.97" (50 mm)
/AIR32250

34 MM Ø
Center Height 1.54" (39 mm) | Offset 1.97" (50 mm)
/AIR42250



UTG® ACCU-SYNC® QR CANTILEVER MOUNTS

LOCKING QUICK RELEASE LEVER MOUNT | TOOL-FREE TENSION ADJUSTMENT | PICATINNY **.338 LAPUA MAGNUM** Rated



UTG® ACCU-SYNC® ANTI-CANT LEVELERS

Magnetic flip-to-side anti-cant bubble leveler easily seen through peripherals without having to break target focus and or adjust cheek weld.

Compatible with UTG Accu-Sync cantilever mounts only.

US PAT. 11293721

1" Ø /MT-RTF1
30 MM Ø /MT-RTF3
34 MM Ø /MT-RTF4

Includes cover plate and Docter® and RMR® footprint compatible optic plates.



1" Ø /MT-RTR1
30 MM Ø /MT-RTR3
34 MM Ø /MT-RTR4



1" Ø

Center Height 1.22" (31 mm) | Offset 1.34" (34 mm)
/AIR11834Q

Center Height 1.22" (31 mm) | Offset 1.97" (50 mm)
/AIR11850Q

Center Height 1.38" (35 mm) | Offset 1.97" (50 mm)
/AIR12250Q

30 MM Ø

Center Height 1.46" (37 mm) | Offset 1.34" (34 mm)
/AIR32234Q

Center Height 1.46" (37 mm) | Offset 1.97" (50 mm)
/AIR32250Q

34 MM Ø

Center Height 1.54" (39 mm) | Offset 2.76" (70 mm)
/AIR42270Q

MOA COMPENSATION

70 MM OFFSET

20 MOA | 0.33° Tilted Degree
34 MM Ø /AIR420MOA
30 MM Ø /AIR320MOA

30 MOA | 0.50° Tilted Degree
34 MM Ø /AIR430MOA
30 MM Ø /AIR330MOA

40 MOA | 0.67° Tilted Degree
34 MM Ø /AIR440MOA
30 MM Ø /AIR340MOA





2-PIECE RINGS

1" Ø

Center Height 0.89" (22.7 mm)
/AQR110

Center Height 1.09" (27.7 mm)
/AQR115

Center Height 1.29" (32.7 mm)
/AQR120

30 MM Ø

Center Height 0.98" (25 mm)
/AQR310

Center Height 1.18" (30 mm)
/AQR315

Center Height 1.46" (37 mm)
/AQR322

34 MM Ø

Center Height 1.26" (32 mm)
/AQR415

Center Height 1.46" (37 mm)
/AQR420

Center Height 1.54" (39 mm)
/AQR422

Center Height 1.93" (49 mm)
/AQR432

UTG® SCOPE MOUNTS

2-PIECE PICATINNY RINGS | Twist Lock

1" Ø

Center Height 0.91" (23 mm)
/RG2W1104

Center Height 1.1" (28 mm)
/RG2W1154

Center Height 1.3" (33 mm)
/RG2W1204

30 MM Ø

Center Height 0.98" (25 mm)
/RG2W3104

Center Height 1.18" (30 mm)
/RG2W3154

Center Height 1.46" (37 mm)
/RG2W3224



2-PIECE PICATINNY RINGS | Hex Thumb Nut

1" Ø

Center Height 0.91" (23 mm)
/RGWM-25L2

Center Height 1.06" (27 mm)
/RGWM-25M4

Center Height 1.22" (31 mm)
/RGWM-25H4

30 MM Ø

Center Height 0.94" (24 mm)
/RGWM-30L4

Center Height 1.14" (29 mm)
/RGWM-30M4

Center Height 1.46" (37 mm)
/RGWM-30H4



2-PIECE DOVETAIL RINGS | Hex

1" Ø

Center Height 1.06" (27 mm)
/RGPM-25M4

Center Height 1.34" (34 mm)
/RGPM-25H4

30 MM Ø

Center Height 1.14" (29 mm)
/RGPM-30M4

Center Height 1.42" (36 mm)
/RGPM-30H4



DOVETAIL INTEGRAL MOUNT | Hex

1" Ø

Center Height 1.06" (27 mm)
/RGPM2PA-25M4

Center Height 1.34" (34 mm)
/RGPM2PA-25H4



1" Ø | Offset Mount

Center Height 1.34" (34 mm)
Offset 1.50" (38 mm)
/RGPMOFS38-25H4



RECEIVER MOUNTS



UTG PRO®
FOR RUGER® 10/22®

Length 4.67" (119 mm)
Picatinny Slots 11
6061-T6 Aluminum

/MTU030T22



UTG PRO®
FOR MOSSBERG® 500®/590®

Length 5.5" (139.7 mm)
Picatinny Slots 13
6061-T6 Aluminum

/MTU029SG



UTG PRO®
FOR REMINGTON® 870™/1100™

Length 6.1" (155 mm)
Picatinny Slots 14
6061-T6 Aluminum


/MTU028SG



UTG®
FOR REMINGTON® 700®

Picatinny Slots 6
Steel

LONG ACTION /MNT-RM700
SHORT ACTION /MNT-RM700S



UTG®
FOR SPRINGFIELD ARMORY® M14/M1A

Length 6.10" (155 mm)
Picatinny Slots 15
Aluminum

/MNT-914V2

UTG® SHOTGUN SIDE SADDLE MOUNTS

FOR MOSSBERG® 500® / 590® / 590M®

Removable 4-Capacity shot shell carrier included.

6061-T6 Aluminum

FOR MOSSBERG® 500®/590® /MT-MB590
FOR MOSSBERG® 590M® /MT-MB590M



FOR REMINGTON® 870™

Removable 4-Capacity shot shell carrier included.

Compatible with 12 Gauge Remington® 870™ and 870 DM shotguns with up to a 3.5" chambering.

6061-T6 Aluminum

/MT-RM870



UTG® SUPER SLIM PICATINNY RISER MOUNTS

U.S. PATENT: www.leapers.com/patents

3-SLOT

Length 1.6" (40.6 mm)
6061-T6 Aluminum

0.50" SADDLE HEIGHT /MT-RSX5S
0.75" SADDLE HEIGHT /MT-RSX7S
0.83" SADDLE HEIGHT /MT-RSX8S
1.00" SADDLE HEIGHT /MT-RSX1S



13-SLOT

Length 5.5" (139.7 mm)
6061-T6 Aluminum

0.50" SADDLE HEIGHT /MT-RSX5L
0.75" SADDLE HEIGHT /MT-RSX7L
0.83" SADDLE HEIGHT /MT-RSX8L
1.00" SADDLE HEIGHT /MT-RSX1L
20 MOA COMPENSATED /MT-RSX20MOA







UTG® DOVETAIL TO PICATINNY MOUNTS



FOR ROUND/FLAT DOVETAIL RECEIVER

Compatible with 9–11mm flat or rounded Dovetail rails.

US PAT. 10352656 | EU PAT. EP3196588

Length 5.71" (145 mm)
Picatinny Slots 14
Saddle Height 0.59" (15 mm)
Cantilevered Offset 2" (51.8 mm)
6061-T6 Aluminum

/MNT-DTW145



FOR FLAT DOVETAIL RECEIVER

Compatible with 9–11mm flat Dovetail rails.

US PAT. D837330

Length 3.94" (100 mm)
Picatinny Slots 9
Saddle Height 0.56" (14.32 mm)
6061-T6 Aluminum

/MNT-PMTOWL-A



SNAP-ON RAIL ADAPTOR

Spring-loaded adjustable Dovetail width from 9–11mm.

US PAT. 8752325

Length 1" (25.4 mm)
Picatinny Slots 1 Each
Aluminum and Steel

SET OF 2 /MNT-DT2PW01

UTG® DEDICATED PICATINNY OPTIC MOUNTS



45° OFFSET

FOR DOCTER® FOOTPRINT /RDM-2045
FOR RMR® FOOTPRINT /MT-RMR45



LOW PROFILE

FOR RMR® FOOTPRINT /MT-RMRXS

LOW PROFILE & ABSOLUTE CO-WITNESS

FOR RMR® FOOTPRINT /MT-RMRKIT



ABSOLUTE CO-WITNESS

FOR DOCTER® FOOTPRINT /RDM-20AC
FOR RMR® FOOTPRINT /MT-RMRAC



LOWER 1/3 CO-WITNESS

FOR RMR® FOOTPRINT /MT-RMR13C



FOR AIMPOINT® MICRO FOOTPRINT /MT-T1AC



FOR AIMPOINT® MICRO FOOTPRINT /MT-T113C

UTG® DEDICATED DOVETAIL OPTIC MOUNTS


FOR GLOCK® REAR SIGHT DOVETAIL

FOR DOCTER® FOOTPRINT /RDM-20GL
FOR RMR® FOOTPRINT /MT-RMRGL



FOR 9–11MM FLAT/ROUND DOVETAIL | LOW PROFILE

FOR DOCTER® FOOTPRINT /RDM-20XSD





CARRY HANDLES



UTG PRO® FORGED CARRY HANDLE 7075-T6 Forged

Classic, rock-solid, timeless, but built by modern-day precision manufacturing.

A2 Dual Aperture with 6/3 Drum
Length 7" (177.3 mm)
Width 1.14" (28.9 mm)
Center Height 1.42" (36 mm)
Weight 9.2 oz (261 g)
7075-T6 Aluminum, Steel

REAR /TLURS001



UTG® ENHANCED CARRY HANDLE

Staked and knurled thumb wheels with flathead and M6 hex interface.
Squared Picatinny recoil stops.

A2 Dual Aperture with 6/3 Drum
Length 7" (177.3 mm)
Width 1.27" (31.14 mm)
Center Height 1.42" (36 mm)
Weight 7.37 oz (209 oz)
6061-T6 Aluminum, Steel

REAR /MT-950X

FLIP-UP SIGHTS

UTG PRO® SIGHTS

Stowed Height 0.58" (14.7 mm)
Center Height 1.42" (36 mm)
Weight 1.3 oz (37 g)

FRONT /TLUFS55

Stowed Height 0.58" (14.7 mm)
Center Height 1.42" (36 mm)
Weight 1.5 oz (43 g)

REAR /TLURS55



UTG® SUPER SLIM SIGHTS

Stowed Height 0.57" (14.55 mm)
Center Height 1.42" (36 mm)
Weight 1.3 oz (37 g)

FRONT /MNT-755

Stowed Height 0.58" (14.7 mm)
Center Height 1.42" (36 mm)
Weight 1.6 oz (45 g)

REAR /MNT-955



UTG® ACCU-SYNC® SPRING-LOADED SIGHTS

US PAT. 10119784 | US PAT. D863490 | US PAT. D863489

Stowed Height 0.65" (16.5 mm)
Center Height 1.42" (36 mm)
Weight 1.2 oz (34 g)

FRONT /MNT-757

Stowed Height 0.68" (17.3 mm)
Center Height 1.42" (36 mm)
Weight 1.4 oz (39.69 g)

REAR /MNT-957



UTG® ACCU-SYNC® 45° SIGHTS

US PAT. 10030935 | US PAT. D851203 | US PAT. D852920

Center Height 1.42" (36 mm)
Weight 1.2 oz (33 g)

FRONT /MT-745

Center Height 1.42" (36 mm)
Weight 1.3 oz (37 g)

REAR /MT-945



UTG® SUPER SLIM FIXED SIGHTS



FRONT SIGHT

Center Height 1.42" (36 mm)
Weight 1.1 oz (31 g)

FRONT /MT-754X



HIGH PROFILE FRONT SIGHT

Brings sight center height to 1.42" (36 mm) on lowered offset railed gas blocks.

Weight 1.2 oz (34 g)

FRONT /MT-750X



REAR SIGHT

Center Height 1.42" (36 mm)
Weight 3.5 oz (99 g)

REAR /MT-950RS03

COMPATIBLE ACCESSORIES

UTG® AR FRONT SIGHT TOOL

Steel construction with knurled nonslip grip.

For use with 4-Prong A2 and 5-Prong A1 front sight posts.

/SCP-A1245-A





UTG PRO® M-LOK® FREE FLOAT HANDGUARDS

SUPER SLIM SD

1.65" (41.96 MM) INNER DIAMETER FOR SUPPRESSED USE

US PAT. 10670369



10" LENGTH

Weight 13.7 oz (388.39 g)
Picatinny Slots T25
M-LOK® Slots 35

`/MTU045XLM`

14" LENGTH

Weight 17.09 oz (484.49 oz)
Picatinny Slots T35
M-LOK® Slots 49

`/MTU046XLM`

15" LENGTH

Weight 18.29 oz (518.51 g)
Picatinny Slots T38
M-LOK® Slots 56

`/MTU047XLM`

UTG PRO® M-LOK® FREE FLOAT HANDGUARDS

FORERUNNER TITANIUM Barrel Nut

US PAT. 10670369




10" LENGTH
Weight 7.3 oz (207 g)
Picatinny Slots T6
M-LOK® Slots 19
/MTU045SPM

14" LENGTH
Weight 9.5 oz (269.32 g)
Picatinny Slots T6
M-LOK® Slots 25 (Full) / 7 (Half)
/MTU046SPM

15" LENGTH
Weight 10.3 oz (292 g)
Picatinny Slots T6
M-LOK® Slots 28 (Full) / 3 (Half)
/MTU047SPM

ARWEN

US PAT. 10670369

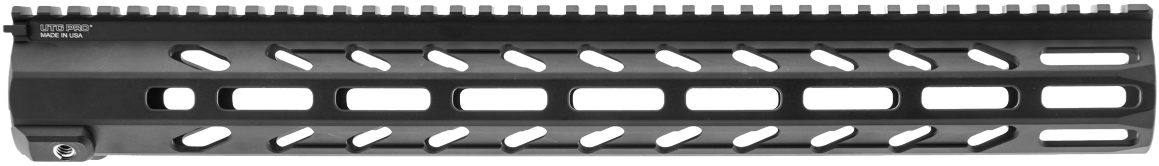

5" LENGTH
Weight 6 oz (170.1 g)
Picatinny Slots T11
M-LOK® Slots 10
/MTU049SEM

10" LENGTH
Weight 9.4 oz (266.5 g)
Picatinny Slots T24
M-LOK® Slots 19
/MTU045SEM

14" LENGTH
Weight 12.1 oz (343 g)
Picatinny Slots T34
M-LOK® Slots 25 (Full) / 3 (Half)
/MTU046SEM

15" LENGTH
Weight 13.1 oz (371.4 g)
Picatinny Slots T38
M-LOK® Slots 28 (Full) / 3 (Half)
/MTU047SEM

17" LENGTH
Weight 14.4 oz (408.23 g)
Picatinny Slots T43
M-LOK® Slots 34
/MTU048SEM

ULTRA SLIM


US PAT. 8806792



15" LENGTH
Weight 11.5 oz (326 g) | Picatinny Slots T6 | M-LOK® Slots 32
/MTU019SSM3

SUPER SLIM

US PAT. 8806792

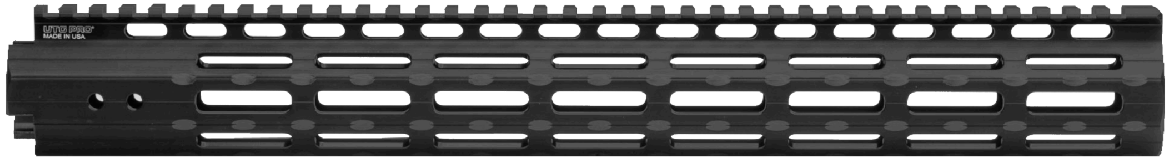

15" LENGTH
Weight 12.8 oz (363 g) | Picatinny Slots T37 | M-LOK® Slots 56

BLACK ANODIZED /MTU019SSM
FDE CERAKOTE /MTU019SSMD


UTG PRO® DROP-IN HANDGUARDS

QUAD RAILS

CARBINE-LENGTH

Length 6.67" (169.5 mm) | Weight 11.3 oz (320.35 g)
Picatinny Slots T16/B16/L16/R16

/MTU001

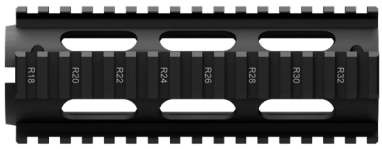

CARBINE-LENGTH Extended Top Rail

Length 7.28" (185 mm) | Weight 11.3 oz (320.35 g)
Picatinny Slots T18/B17/L16/R16


/MTU001T



CARBINE-LENGTH 10.5" with FSP Cutout

Length 10.52" (267.2 mm) | Weight 17 oz (481.9 g)
Picatinny Slots T20/B24/L26/R26


/MTU015



MID LENGTH

Length 8.68" (221 mm) | Weight 14.7 oz (417 g)
Picatinny Slots T20/B20/L20/R20

/MTU007



SUPER SLIM M-LOK®

CARBINE-LENGTH Extended Top Rail

Length 7.28" (185 mm) | Weight 6.2 oz (176 g)
Picatinny Slots T18
M-LOK® Slots 24 (Full) / 4 (Half)
US PAT. D851199

/MTU001SSM



CARBINE-LENGTH 15" with FSP Cutout

Length 15" (381 mm) | Weight 12.4 oz (352 g)
Picatinny Slots T30
M-LOK® Slots 45 (Full) / 10 (Half)
US PAT. D851200

/MTU015SSM



UTG PRO® SUPER SLIM FOREND FOR RUGER® PC CARBINE™

Lower 1/3 co-witness Docter® footprint optic mount included.

Length 6.5" (165.1 mm)
Width 1.57" (40 mm)
Height 1.6" (40.82 mm)
Weight 9.3 oz (263.65 g)
M-LOK® Slots 8

/MTU050SSM







UTG® GOLIATH™ BIPODS

Newly launched in 2025 with an ARCA addition in 2026, the UTG Goliath bipod is purpose-built for precision. Extra wide, low, and sturdy, rigorously tested and .50 cal rated. Available in 2 heights: 8-12 inches and an extra low profile 6-8 inches weighing in at sub 25 ounces. Oversized and shooter-customizable separated pan and tilt levers. Positive and tactile leg locking mechanisms. From bearing load prone to higher intensity positioning, the Goliath is the ultimate tool to steady your shooting.



UTG® OVER BORE BIPODS

A staple in UTG big bore bipods, the UTG Over Bore mounts over top of your barrel for a wider stance, lower center of gravity, and a more stable shooting position. Well-loved by shooters of all types, the over bore QD mount is now sold separately to configure multiple builds with ease.



UTG® RECON 360® TL BIPODS

The UTG Recon 360 TL is our best-selling bipod line. Available in M-LOK® and Picatinny versions, the Recon 360 system features a customizable tension adjustment lever for smooth 360 degree panning and an additional 15 degree in tilt angle. Picatinny model includes swivel stud mount adaptor.



UTG PRO® TBNR® BIPODS

The UTG Pro TBNR bipod, because The Best Never Rest. 6061-T6 Aluminum with extra strength inner legs of 7075-T6, Mil-spec Type III hard coat anodized. Heat treated steel-on-steel lockup. Patented height adjustable spiral guided leg extension. 360 degree panning and 19 degree tilt in any direction. Proudly made in USA.



UTG® RECON FLEX® BIPODS

The UTG Recon Flex is a unique 2-piece bipod design for an ultra-slim and lightweight portable solution. Legs directly attach to M-LOK® handguards to streamline your stowed position. 5-position foldable and extendable, legs feature one-piece locking sliders for easy manipulation.

UTG® BIG BORE BIPODS

GOLIATH™ BIPOD .50 BMG Rated



Lockable three-position foldable and center height adjustable and lockable legs.
Stable 60° open angle with tension adjustable 40° tilting and 28° panning.
Durable matte black anodized aluminum and steel reinforced construction.
QD rubber oversized feet for added traction, compatible with most aftermarket QD foot pads.
Tool-free tension adjustable Quick Release Picatinny base.

PICATINNY

Open Angle 60°
Foldable Positions 0°, 45°, 90°
Panning 28°
Tilting 40°
Weight 27 oz (773 g) / 24.5 oz (695 g)

8"–12" /TL-BPFS02Q
6"–8" /TL-BPFS03Q

ARCA NEW

Open Angle 60°
Foldable Positions 0°, 45°, 90°
Panning 28°
Tilting 40°
Weight 29 oz (823 g) / 26 oz (745 g)

8"–12" /TL-BPFS02ARC
6"–8" /TL-BPFS03ARC

BIG BORE BIPOD .50 BMG Rated



Steel reinforced matte black anodized aluminum construction withstands big bore calibers up to .50 BMG.
Tension adjustable 35° panning and 55° left and right tilt with wide 70° open angle for increased stability.
Lockable three-position foldable and center height adjustable from 9.5"–14.0".
Serrated and rotatable steel foot pads with wide surface area.
Lockable notched legs with automatic leg retraction.

PICATINNY

Open Angle 70°
Foldable Positions 0°, 45°, 90°
Panning 35°
Tilting 55°
Weight 34.9 oz (989.4 g)

9.5"–14" /TL-BPFS01-A

OVER BORE BIPOD .50 BMG Rated



Wide open angle and lower center of gravity improves stability.
12 o'clock mounted quick detachable Picatinny base.
Lockable three-position foldable and center height adjustable from 7"–11" with lockable notched leg extensions.
22° panning and 44° tension adjustable left and right tilt.
Steel reinforced matte black anodized aluminum construction.

PICATINNY

Open Angle 70°
Foldable Positions 0°, 45°, 90°
Panning 22°
Tilting 44°
Weight 24.1 oz (683 g)

7"–11" /TL-BPOB01-A

COMPATIBLE ACCESSORY

OVER BORE BIPOD QD MOUNT



Quick detachable Picatinny mount for the UTG Over Bore Bipod (one piece included with TL BPOB01-A). Allows a single Over Bore Bipod to be quickly removed and attached between multiple rifles.

/TL-BPAD2

UTG PRO® TBNR® BIPOD

Lockable three-position foldable with steel-on-steel lockup.

Patented height adjustable spiral guided leg extensions with steel ball bearing detent ring locks manages height adjustment and retention.

Interchangeable foot pads compatible with most aftermarket pads with QD locking detent.

US PAT. 10323897 | US PAT. 10690434



M-LOK®

Open Angle 50°
Foldable Positions 0°, 45°, 90°
Panning 360°
Tilting 19°
Weight 19.0 oz (539 g) / 17.2 oz (488 g)

8.5"–11" /TLUBP01M
7"–9" /TLUBP02M-A

PICATINNY

Open Angle 50°
Foldable Positions 0°, 45°, 90°
Panning 360°
Tilting 19°
Weight 19.7 oz (559 g) / 18.3 oz (519 g)

8.5"–11" /TLUBP01
7"–9" /TLUBP02-A

UTG® RECON 360® TL BIPOD

Lockable three-position foldable legs with lockable leg extensions and nonslip rubberized foot pads.
Tension adjustable 360° panning and 15° left, right, forward, and rearward tilt.
User configurable and re-adjustable tension adjustment throw lever.
Durable matte black anodized aluminum construction.

US PAT. D758521 | US PAT. D758522



M-LOK®

Open Angle 50°
Foldable Positions 0°, 45°, 90°
Panning 360°
Tilting 15°
Weight 8.9 oz (252 g) / 11.3 oz (319 g) / 15.3 oz (434 g)

5.5"–7" /TL-BPM02-B
6.5"–9" /TL-BPM01-B
8"–12" /TL-BPM03-B


PICATINNY

Swivel stud to Picatinny adaptor included.
Open Angle 50°
Foldable Positions 0°, 45°, 90°
Panning 360°
Tilting 15°
Weight 10.9 oz (309 g) / 12.2 oz (346 g) / 14.5 oz (411 g)

5.5"–7" /TL-BP02-B
7"–9" /TL-BP01-B
8"–12" /TL-BP03-B

UTG® RECON FLEX® BIPODS

5 Position bidirectional folding with Recon Flex® II featuring automatic leg extension deployment.
Directly attaches to M-LOK® handguards at 3 and 9 o'clock.
Requires 2 M-LOK® slots per leg to mount.

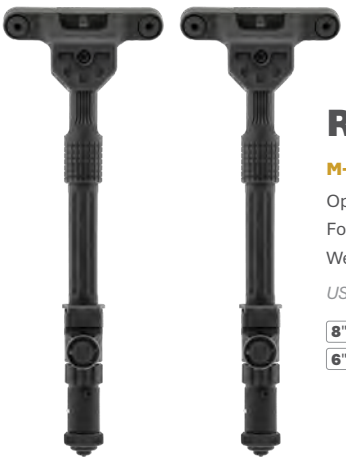

RECON FLEX® II

M-LOK®

Open Angle 50°
Foldable Positions 0°, 45°, 90°, 135°, 180°
Weight 11.1 oz (314.7 g)

7"–9" /TL-BPDM03



RECON FLEX®

M-LOK®

Open Angle 50°
Foldable Positions 0°, 45°, 90°, 135°, 180°
Weight 13.8 oz (391.2 g) / 10.8 oz (306 g)

US PAT. 10295292

8"–11" /TL-BPDM02
6"–8" /TL-BPDM01

UTG® QUICK DETACH BIPODS

SUPER DUTY QD BIPOD

Heavy duty steel and aluminum construction with a matte black finish.
Height adjustable and lockable leg extensions.
Spring-loaded folding legs.
Swivel stud to Picatinny adaptor included.
US PAT. 8397421



PICATINNY | Quick Detachable

Open Angle 50°
Foldable Positions 0°, 90°
Panning 15°
Weight 13.69 oz (388 g)

6"–8" /TL-BP98Q

RUBBER ARMORED QD BIPOD

Protected rubber armored legs stand up to the harshest of environments.
Height adjustable legs lockable via thumb wheel.
5 position bidirectional folding legs.
Swivel stud to Picatinny adaptor included.
US PAT. 8397421



PICATINNY | Quick Detachable

Open Angle 50°
Foldable Positions 0°, 45°, 90°, 135°, 180°
Panning 15°
Weight 14 oz (397 g)

6"–8.5" /TL-BP20Q-A

TACTICAL OP BIPODS

Heavy duty steel and aluminum construction with a matte black finish.
Height adjustable legs with locking thumb wheel & automatic retraction.
Spring-loaded folding legs.
Swivel stud to Picatinny adaptor included.



PICATINNY | Quick Detachable

Open Angle 50°
Foldable Positions 0°, 90°
Panning 15°
Weight 12.84 oz (364 g) / 12.8 oz (363 g)
US PAT. 8397421

6.0"–7.42" /TL-BP78Q
8.22"–12.65" /TL-BP88Q

PICATINNY

Open Angle 50°
Foldable Positions 0°, 90°
Panning 15°
Weight 12 oz (342 g) / 13.51 oz (383 g)

5.8"–7.51" /TL-BP78
8.0"–12.5" /TL-BP88

COMPATIBLE ACCESSORY

SWIVEL STUD TO PICATINNY ADAPTOR

Converts a traditional sling swivel stud to accept picatinny mounted bipods.

/TL-BPAD1





TUBES & BUFFERS

UTG PRO® 6-POSITION RECEIVER EXTENSION TUBES & KITS

AR15 | TUBE KIT

- 6061-T6 | BLACK ANODIZE /TLU001-KIT
- 6061-T6 | FDE CERAKOTE /TLU001D-KIT

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.

AR15 | TUBE ONLY

- 6061-T6 | BLACK ANODIZE /TLU001
- 6061-T6 | FDE CERAKOTE /TLU001D
- 7075-T6 | BLACK ANODIZE /TLU001MS

AR308 | TUBE ONLY

- 6061-T6 | BLACK ANODIZE TLU002



UTG PRO® AR PISTOL RECEIVER EXTENSION TUBE & KIT

TUBE KIT

- 7075-T6 | BLACK ANODIZE /TLU008-KIT

Includes receiver extension tube, carbine buffer, buffer spring, QD receiver end plate, and castle nut.

TUBE ONLY

- 7075-T6 | BLACK ANODIZE /TLU008



UTG® CARBINE-LENGTH RECOIL BUFFERS

- H2 | 4.6 OZ /RB-T6BFH2
- CARBINE | 3.0 OZ /RB-T6BFHC



UTG® A2 RECEIVER EXTENSION TUBE KIT

- 6061-T6 | BLACK ANODIZE /TLT-A2KT

Includes receiver extension tube, buffer, buffer spring, stock spacer, stock spacer screw.



UTG PRO® COLLAPSIBLE STOCKS

S1 COLLAPSIBLE STOCKS & ASSEMBLIES

MIL-SPEC | WATER-RESISTANT BATTERY STORAGE | QD SLING ATTACHMENT | 6-POSITION

STOCK ASSEMBLY

BLACK / RBUS1BM

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.

STOCK ONLY

BLACK / RBUS1BMS

FDE / RBUS1DMS



S2 COLLAPSIBLE STOCKS & ASSEMBLIES

MIL-SPEC | QD SLING ATTACHMENT | 6-POSITION

STOCK ASSEMBLY

BLACK / RBUS2BM

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.

STOCK ONLY

BLACK / RBUS2BMS



S3 COLLAPSIBLE STOCKS & ASSEMBLIES

MIL-SPEC | QD SLING ATTACHMENT | 6-POSITION *US PAT. D773005*

STOCK ASSEMBLY

BLACK / RBUS3BM

FDE / RBUS3DM

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.

STOCK ONLY

BLACK / RBUS3BMS



S4 COLLAPSIBLE STOCKS & ASSEMBLIES

MIL-SPEC | QD SLING ATTACHMENT | 4-POSITION *US PAT. D818074*

STOCK ASSEMBLY

BLACK / RBUS4BM

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.

STOCK ONLY

BLACK / RBUS4BMS

FDE / RBUS4DMS



U6 COLLAPSIBLE STOCK ASSEMBLY

MIL-SPEC | 6-POSITION

STOCK ASSEMBLY

BLACK / RBU6BM

Includes receiver extension tube, carbine buffer, buffer spring, receiver end plate, and castle nut.



UTG® A2 FIXED STOCK ASSEMBLIES

STOCK ASSEMBLY

AR15 / RB-T469B

AR308 / RB-T308FB

Complete with receiver extension tube, buffer, buffer spring, stock spacer, stock spacer screw and features a standard sling loop and storage compartment with trap door.





PISTOL GRIPS



UTG PRO® AMBIDEXTROUS CONTOURED PISTOL GRIP

35° GRIP ANGLE

Weight 3.7 oz (105 g)
Impact Resistant Polymer
Grip Storage

BLACK /RBUPG01B
FDE /RBUPG01D



UTG® AMBIDEXTROUS ULTRA SLIM PISTOL GRIP

18° GRIP ANGLE

Weight 3.8 oz (108 g)
Impact Resistant Polymer
Grip Storage

/RBT-APG01B



UTG® CONTOURED PISTOL GRIP

25° GRIP ANGLE

Weight 5.1 oz (114.5 g)
Impact Resistant Polymer
Grip Storage

/RB-TPG172B

UTG® VERTICAL GRIPS



ULTRA SLIM FOREGRIPS

Height 2.4" (60 mm)
Width 0.7" (17.5mm)
Weight 1.4 oz (40 g)
6061-T6 Aluminum

M-LOK® /MT-FGM01X
PICATINNY /MT-FGP01X



SUPER SLIM FOREGRIPS

Removable red and blue anodized inserts for M-LOK® and Keymod models adds a level of personalization.

Height 3.5" (90 mm)
Width 1.1" (27.9 mm)
Weight 4.2 oz (119 g)
6061-T6 Aluminum

M-LOK® /MT-FGM01
KEYMOD /MT-FGK01
PICATINNY /MT-FGP01



COMPACT FOREGRIP

Length 1.6" (39 mm)
Width 1.078" (27.4mm)
Weight 4 oz (114 g)
Impact Resistant Polymer

M-LOK® /RB-FGM01



VERTICAL FOREGRIP

Height 5.4" (137 mm)
Width 1.7" (43 mm)
Weight 6.7 oz (190 g)
Impact Resistant Polymer

PICATINNY /RB-FGRP168B



CONTOURED VERTICAL FOREGRIP

Height 4.8" (122 mm)
Width 2.25" (57 mm)
Weight 5.1 oz (145 g)
Impact Resistant Polymer

PICATINNY /RB-FGRP172B



5-POSITION FOLDABLE FOREGRIP

Height 5.56" (141.16 mm)
Width 1.28" (32.5 mm)
Weight 6.9 oz (196 g)
Impact Resistant Polymer

PICATINNY /RB-FGRP170B

D GRIP®

QUICKLY TRANSITIONS FROM FOREGRIP TO BIPOD

Matte black aluminum construction with quick-detachable lever lock Picatinny mount.
Contoured foregrip with nonslip and heat-resistant rubberized inlays.
Ambi. quick release lever deploys bipod legs automatically.
US PAT. 8397421 | US PAT. 9169958 | EU PAT. EP2245522-0002 | EU PAT. EP2245522-0001

Foregrip Height 5.4" (137mm)
Width 1.37" (34.8 mm)
Weight 12.7 oz (360 g)
Bipod Center Height 8.2" (208 mm)
Bipod Open Angle 65°

PICATINNY /MNT-DG02Q





UTG® ULTRA SLIM ANGLED FOREGRIPS

M-LOK®

Length 3.9" (99.1 mm)
Weight 1.4 oz (39.7 g)
6061-T6 Aluminum

BLACK /MT-AFGM01
BLUE /MT-AFGM01B
RED /MT-AFGM01R

KEYMOD

Length 3.9" (99.1 mm)
Weight 1.3 oz (37 g)
6061-T6 Aluminum

BLACK /MT-AFGK01
BLUE /MT-AFGK01B
RED /MT-AFGK01R

PICATINNY

Length 3.9" (99.1 mm)
Weight 1.8 oz (52 g)
6061-T6 Aluminum

BLACK /MT-AFGP01



UTG® HAND STOPS



ANGLED INDEX MOUNTS

Reversible for left or right-side handguard installation.
Thumb indexing configurable for forward or rearward cant.
Removable spacer to accommodate handguard clearance.
US PAT. 10612880

Height 1.39" (35mm)
Weight 0.8 oz (23 g)
6061-T6 Aluminum

M-LOK®

BLACK /TL-TRM01
BLUE /TL-TRM01B
RED /TL-TRM01R



ULTRA SLIM HAND STOPS

Height 1.5" (38.1 mm)
Weight 0.7 oz (20 g)
6061-T6 Aluminum

M-LOK®

BLACK /TL-HSM01
BLUE /TL-HSM01B

KEYMOD

BLACK /TL-HSK01
BLUE /TL-HSK01B
RED /TL-HSK01R



HAND STOP/BARRICADE REST

Compatible with UTG Pro Keymod Super Slim free-float handguard.

Height 1.3" (33 mm)
Weight 1.8 oz (49 g)
6061-T6 Aluminum

KEYMOD /TL-HS02B



POLYMER MAGAZINES

Having underwent numerous rounds of fully loaded drop testing, live-fire testing in the thousands, and taking on fully automatic rates of fire and adverse temperatures, Leapers has the steadfast reliability shooters require out of a magazine. Take with you your preference of windowed or non-windowed glass fiber reinforced polymer magazines featuring high visibility blue followers and high longevity stainless steel springs. With every magazine, performance you can count on.

UTG® POLYMER MAGAZINES FOR GLOCK®

NEW GEN II OPTIMIZED MAGAZINE BODY AND FOLLOWER GEOMETRY FOR GREATER COMPATIBILITY AND FUNCTION ACROSS DIFFERENT PLATFORMS AND CLONES.

Durable and impact resistant glass fiber reinforced matte black polymer construction.
Anti-tilt high visibility blue follower and high longevity stainless steel spring for reliable feeding.
Easy disassembly and maintenance with removable flared floor plate.
Left and right side round count indicators.
Compatible with reversible magazine release for left or right-handed users.



9MM | NON-WINDOWED

17 ROUND /RBT-GL917-A **NEW**

15 ROUND /RBT-GL915-A **NEW**

33 ROUND /RBT-GL933





9MM | WINDOWED

33 round capacity with durable co-molded polymer window and debossed round count indicators at 10, 15, 20, 25, and 33.

Flared lower main body with raised bosses for additional grip retention.

US PAT. D989907

33 ROUND /RBT-PD933-A **NEW**



AR POLYMER MAGAZINES

Durable and impact resistant glass fiber-reinforced matte black polymer construction.
High visibility blue anti-tilt follower and high longevity stainless steel spring for reliable feeding.
Easy disassembly and maintenance with removable flared floor plate.

US PAT. D849178



UTG®

5.56 | NON-WINDOWED

10 ROUND /RBT-AM10



UTG PRO®

5.56 | NON-WINDOWED

30 ROUND /RBUAM01



UTG®

5.56 | WINDOWED

30 ROUND | BLACK /RBT-AM30
30 ROUND | FDE /RBT-AM30D




UTG®

.308 | WINDOWED

25 ROUND /RBT-DM25

UTG® AK/AKM WINDOWED POLYMER MAGAZINE



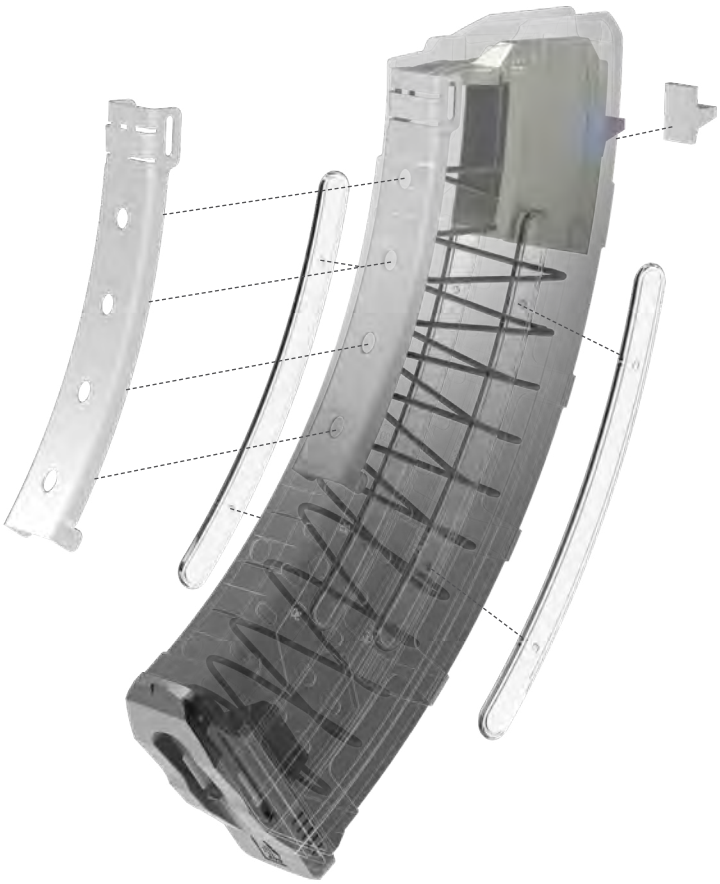

7.62X39MM | WINDOWED

Steel rear locking lug and reinforced front lug and spine.

High visibility blue follower and stainless-steel spring.

Raised bosses for added grip retention. Windowed with round count indicators at 10, 15, 20, 25, and 30.

Removable flared floor plate for easy disassembly and maintenance.

US PAT. D849178


Length 2.5" (64 mm)
Width 1.26" (32 mm)
Height 9.13" (232 mm)
Weight 7 oz (198 g)

30 ROUND / RBT-AKM30



UTG® LASERS



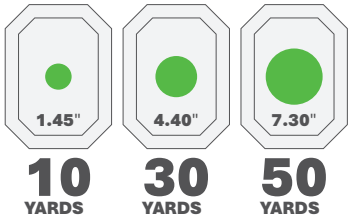

BULLDOT® GREEN LASER

The BullDot places a larger diameter dot on target allowing for quicker acquisition and shot placement under stress at various distances. With inherent higher visibility, the green BullDot laser is an ideal choice on carbines or shotguns.

Length 3.37" (86 mm)
Width 1.89" (48 mm)
Weight 4.35 oz (123 g)
Battery Type CR2
Runtime 6.5 hrs

/SCP-LS289S



COMPACT GREEN LASER

Ambi. momentary and constant on activation toggles.

Length 2.4" (61 mm)
Weight 2.1 oz (60 g)
Battery Type CR1/3N
Runtime 3 hrs

/SCP-LS279S-A



COMPACT RED LASER

Constant and pulse dot modes of operation with memory of last-used mode upon reactivation.

Length 1.2" (30 mm)
Weight 1.2 oz (34 g)
Battery Type LR48 (AG5)
Runtime 1 hr

/SCP-LS200

UTG® WEAPON LIGHTS

200 LUMEN PISTOL LIGHT

Ambi. momentary and constant on activation toggles.

IPX7 Waterproof Rated
Length 2.98" (75.7 mm)
Weight 2.6 oz (73 g)
Battery Type CR2
Runtime 1 hr

/LT-ELP120R



400 LUMEN QD GRIP LIGHT

Push button momentary and constant on activation.
Quick-detachable lever lock Picatinny mount.
US PAT. 8397421

Length 2.83" (71.9 mm)
Weight 12.35 oz (350 g)
Battery Type CR123A
Runtime 3 hrs

/MNT-EL228GPQ-A



UTG® LIGHT & LASER COMBOS



400 LUMEN LIGHT WITH RED LASER

Length 5.1" (129.54 mm)
Weight 7.5 oz (212.6 g)
Light Battery CR123A
Laser Battery LR44(AG13)
Light Runtime 3 hrs
Laser Runtime 1.3 hrs

/LT-ELP38Q-A

400 LUMEN LIGHT WITH GREEN LASER

Length 5.35" (135.89 mm)
Weight 8.6 oz (243.8 g)
Light Battery CR123A
Laser Battery CR2
Light Runtime 3 hrs
Laser Runtime 3.3 hrs

/LT-ELP39Q-A

UTG® OFFSET LIGHT MOUNTS

Compatible with 27 mm, 25.4 mm (1"), and 20 mm flashlight bodies using the included inserts.



PICATINNY /RG-FL138



M-LOK® /RG-FL27MC
KEYMOD /RG-FL27KC



UTG PRO® M-LOK® ARCA RAILS 7075-T6 Aluminum

Contoured to prevent snagging and discomfort when shooting unsupported.
M-LOK® interface spaced for installation in complete slots or in between adjacent slots.
Laser engraved positional indicator markings.
Forms a continuous rail when multiple rails are installed in line.
Compatible with standard ARCA, R-Lock, and MRAS QD adaptors and mounts.

3.1" LENGTH

Weight 1.3 oz (37 g) | M-LOK® Slots 1 | Fits into 2 M-LOK® Slots

/TLUMA01



7.9" LENGTH

Weight 2.6 oz (74 g) | M-LOK® Slots 3.5 | Fits into 5 M-LOK® Slots

/TLUMA02



9.4" LENGTH

Weight 3 oz (85 g) | M-LOK® Slots 4.5 | Fits into 6 M-LOK® Slots

/TLUMA03



14.2" LENGTH

Weight 4.1 oz (116 g) | M-LOK® Slots 7.5 | Fits into 9 M-LOK® Slots

/TLUMA04



PANEL COVERS & RAIL SECTIONS



UTG® SNAP-IN M-LOK® PANEL COVERS NEW

Heat-resistant nonslip textured polymer.
Compatible with most octagonal profile handguards.
Cable-management.

Length 1.6" (39.5 mm)
Width 1.1" (28 mm)
Weight 0.2 oz (5 g)
Fits into 1 M-LOK® Slot

SET OF 6 /RBT-CMP01



UTG® RUBBERIZED M-LOK® RAIL COVERS

Heat-resistant nonslip textured polymer.
Compatible with most octagonal profile handguards.

Length 3.15" (80 mm)
Width 1.03" (26.16 mm)
Weight 0.5 oz (14.17g)
Fits into 2 M-LOK® Slot

SET OF 4 /RB-HP30M




UTG® M-LOK® ANGLED PICATINNY MOUNT

Angled offset positions accessories at the 11 or 1 o'clock positions.
Removable spacer adjusts clearance to fit various handguard profiles.

Length 1.6" (40.64 mm)
Width 0.7" (17.78mm)
Height 1.3" (33.02mm)
Weight 1.1 oz (31.2 g)
6061-T6 Aluminum

3-SLOT /MT-MP45

UTG PRO® M-LOK® PICATINNY RAIL SECTIONS



3-SLOT

Length 1.57" (40 mm)
Weight 0.6 oz (17 g)
6061-T6 Aluminum

/MTURS10S



7-SLOT

Length 3.14" (80 mm)
Weight 1.2 oz (34 g)
6061-T6 Aluminum

/MTURS10M



4-SLOT

Length 1.57" (40 mm)
Weight 0.56 oz (16 g)
6061-T6 Aluminum

/MTURS09S



8-SLOT

Length 3.14" (80 mm)
Weight 1.16 oz (33 g)
6061-T6 Aluminum

/MTURS09M

UTG PRO® PICATINNY RAIL SECTIONS FOR G36®



SET OF 3

Includes 9-Slot x2, 13-Slot x1
9-Slot: Length 4.6" (116.8 mm) | Weight 1.5 oz (43 g)
13-Slot: Length 6" (152.4 mm) | Weight 1.9 oz (54 g)
6061-T6 Aluminum

/MTURS11

UTG® PICATINNY RAIL SECTIONS FOR G36®



SET OF 2

Includes 7-slot x2
Length 3.87" (98.3 mm)
Weight 1.27 oz (36 g)
6061-T6 Aluminum

/MNT-P501



SET OF 3

Includes 7-Slot x2, 13-slot x1
7-Slot: Length 6.09" (154.7 mm) | Weight 1.27 oz (36 g)
13-Slot: Length 3.87" (98.3 mm) | Weight 1.98 oz (56 g)
6061-T6 Aluminum

/MNT-P503



SET OF 3

Includes 13-slot x3
Length 6.09" (154.7 mm)
Weight 1.98 oz (56 g)
6061-T6 Aluminum

/MNT-P505



QD SLING SWIVEL ADAPTORS



UTG PRO® QD SLING SWIVEL ADAPTORS

Quarter turn rotational stops.
6061-T6 Aluminum

M-LOK® /TLUSW001
KEYMOD /TLUSW002



UTG® SLING SWIVEL PICATINNY ADAPTOR

Tool-free thumb nut retention.
1.25" Loop
Aluminum & Steel

/TL-SWMTP01



UTG® ANGLED QD SLING SWIVEL PICATINNY ADAPTOR

Quarter turn rotational stops.
Aluminum

/TL-SWPM01



UTG® PICATINNY/ KEYMOD QD SLING SWIVEL ADAPTOR

Aluminum

/TL-SWPK01

UTG® STEEL QD SLING SWIVELS



1.09" LOOP

Compatible Sling Width 1"
Loop Thickness 0.13"
Push Button Diameter 0.47"

/TL-QDSW08A



1.25" LOOP

Compatible Sling Width 1.25"
Loop Thickness 0.13"
Push Button Diameter 0.47"

/TL-QDSW08B



1.29" C-SHAPE LOOP

Compatible Sling Width 1.29"
Loop Thickness 0.13"
Push Button Diameter 0.47"

/TL-QDSW08C



1.38" LOOP

Compatible Sling Width 1.38"
Loop Thickness 0.17"
Push Button Diameter 0.60"

/TL-QDSW18



1.41" LOOP

Compatible Sling Width 1.41"
Loop Thickness 0.18"
Push Button Diameter 0.64"

/TL-QDSW38



UTG® AR15 ACCESSORIES

LOWER UPGRADE ACCESSORIES



OVERSIZED BOLT CATCH
/TLT-TKSBC



AMBI. 45/90 SAFETY SELECTOR
BLACK /TLT-TKSLT
BLUE /TLT-TKSLTB
RED /TLT-TKSLTR



AMBI. EXTENDED MAGAZINE RELEASE
BLACK /TLT-TKSMR
BLUE /TLT-TKSMRB
RED /TLT-TKSMRR



OVERSIZED TRIGGER GUARD
BLACK /TLT-TKSTG
BLUE /TLT-TKSTGB
RED /TLT-TKSTGR



LOWER UPGRADE KIT
/TLT-TKS01

QUICK INSTALL DUST COVER

Matte black impact and heat resistant polymer construction with steel spring-loaded detent.

Patented tool-free design quickly installs without having to remove the handguard prior.

Compatible with all .223/5.56 mil-spec and most billet upper receivers.

US PAT. 10393467

/RBT-TKSDC



QD RECEIVER END PLATE

Quarter-turn rotational overtravel stops restrict sling swivel movement.

Steel construction with matte black finish.

Compatible with mil-spec forged and most billet lower receivers.

/TL-T6TD03



UTG® MUZZLE DEVICES & GAS BLOCK

MICRO GAS BLOCK

Low profile gas block for .750" at the gas port.

Machined from 4140 steel with durable phosphate finish.

Includes gas tube roll pin, set screws, and Hex wrench.

/MNT-ARMGB01



CARBINE BLANK FIRING ADAPTOR

Durable reinforced steel construction finished in high visibility yellow.

Compatible with the 11.5"–16" AR15 and M4 carbine equipped with A1/A2 flash suppressor.

/MNT-16AD2-C



UTG® ACCESSORIES

FOR CZ® SCORPION™ EVO 3

CHARGING HANDLE

Reversible for left or right-side drop-in Installation.

Extended handle with dehorned corners and melted contours.

BLACK /TLT-CSCH01
BLUE /TLT-CSCH01B
RED /TLT-CSCH01R



SAFETY SELECTORS

Extended levers with dehorned corners and melted contours.

Ergonomic thumb safety index for ease of manipulating safety on/off.

BLACK /TLT-CSSLT01
BLUE /TLT-CSSLT01B
RED TLT-CSSLT01R



UTG® TOOLS & MAINTENANCE

BROKEN SHELL EXTRACTOR

Removes broken shell casings from a jammed chamber.

Threaded two-piece design adjusts overall length to completely engage rim of case mouth.

Steel construction.

.223/5.56 /TL-EX223
.308/7.62 X 51MM /TL-EX308



AR15 RECEIVER WEDGE

Improves accuracy and tightens upper to lower receiver fitment.

Minor trimming may be required for ideal fit.

/RB-A005



CHAMBER SAFETY FLAG

High visibility orange for immediate and reliable identification of an empty chamber.

0.2" (5.1 mm) diameter stem fits most chambers and can be cut down to fit .

Durable impact-resistant polymer construction.

SET OF 6 /RB-CSF06



AK FRONT SIGHT TOOL

Easily makes front sight windage and elevation adjustments.

Compatible with AK and SKS platforms.

Steel construction.

/SCP-WEA05



UNIVERSAL SHOTGUN FOREND WRENCH

Compatible with Remington® 870™, Mossberg® 500®, 590®, 835®, and clones.

Nickel plated steel construction.

/TL-SHWR01



AR15 CLEANING KIT

Kit includes takedown cleaning rod, bronze bore and chamber brush adaptors, patch adaptor, oil bottle, cleaning patches, and double-sided nylon brush.

Cleaning rod compatible with other 8-32 threaded adaptors.

Storable in A2 stock storage compartment or carried on the belt or web gear via included belt loop and Alice clip.

.223/5.56 /TL-A041



STEEL AR15 ARMORER'S WRENCHES



ARMORER'S WRENCH

Includes flat head screwdriver, 1/2" torque interface, 3/4", 5/8", and 7/8" wrenches in addition to wrenches specific for the USGI barrel nut, YHM® jam nut, UTG Pro super slim barrel nut, castle nut, and a1 3-prong flash hider.

AR15/AR308 /TL-ARWR01



MINI ARMORER'S WRENCH

Includes flat head screwdriver, 1/2" and 3/8" torque interfaces, 3/4" and 5/8" wrenches in addition to wrenches specific for the USGI barrel nut, castle nut, and A1 3-prong flash hider.

AR15 /TL-ARWR02



UTG® LONG GUN CASES

RAPID DEPLOYMENT PACKS

Discrete and multifunctional, UTG Rapid Deployment Packs feature a quick deployment pull tab, padded back panel and barrel catch, and internal MOLLE webbing configurable to your needs.



34" LENGTH | Single Rifle

34.5" x 14.5" (876 x 368 mm)

BLACK /PVC-PSP34B

34" LENGTH | Double Rifle

34" x 13" (864 x 330 mm)

BLACK/NAVY /PVC-PSP34BN

34" x 13" (864 x 330 mm)

BLACK/GRAY /PVC-PSP34BG

30" LENGTH | Double Rifle

30" x 12" (762 x 305 mm)

BLACK/NAVY /PVC-PSP30BN

KEEP-IT-SIMPLE KIS GUN CASES

As the name suggests, the Keep It Simple line delivers core essentials: two outer pockets, wall hanger loops, carry handle, adjustable shoulder strap, and dual #8 lockable zippers.



28" LENGTH

28" x 12.5" (711 x 317.5 mm)

/PVC-KIS28B

38" LENGTH

38" x 11" (965 x 279 mm)

/PVC-KIS38B2

MC GUN CASES

The UTG MC gun case line features durable 600D polyester construction with an outer compartment, padded main compartment with configurable retention straps, and dual #10 lockable zippers.



25" LENGTH

25" x 12" (635 x 305 mm)

/PVC-MC25B-A

32" LENGTH

32" x 12" (813 x 305 mm)

/PVC-MC32B-A

34" LENGTH

34"x 12" (864 x 305 mm)

/PVC-MC34B-A



UTG® ALL-IN-ONE RANGE BAG

The UTG Range bag features an open top with a clear zippered pocket inside, zippered size pocket with adjustable bottle pouch, and a thickly padded bottom with 4 rubber footpads. It comes with 2 removable pistol cases, 8 adjustable internal dividers, and brass bag.

21" x 9" x 8" (533 x 229 x 203 mm)

/PVC-P365B



UTG® PISTOL CASES

UTG pistol cases have a range for your needs. The double pistol case features a fully padded interior with 6 universal mag pouches and outer accessory pocket. The competition version has the addition of 2 universal detachable holsters, padded center pouch with multiple storage pockets, and elastic bands for magazines and equipment.

COMPETITION SHOOTER'S DOUBLE PISTOL CASE

11.5" x 9.5" (292 x 241 mm)

/PVC-PC05B



DOUBLE PISTOL CASE

13" x 10" (330 x 254mm)

/PVC-PC02B



SINGLE PISTOL CASE

11" x 8" (279 x 203mm)

/PVC-PC01B



DISCREET PISTOL CASE

5" x 7" (127 x 178 mm)

/PVC-PC380



UTG® BACKPACKS

TRAIL SEEKER, TRAIL CAM BACKPACK

The UTG Trail Cam backpack boasts a 28 L capacity with over 8 configurable compartments using padded hook-and-loop dividers. With additional pockets for storage, this pack is the perfect outdoor companion.

14" x 9" x 19" (356 x 229 x 483 mm)

28 Liter Capacity

9 Trail Cam Capacity

/PVC-GC01



OVERBOUND PACK

The UTG Overbound pack is the ultimate bugout bag for crossover use. Durable 600D nylon construction, optimized space saving compartments and pockets, laptop compartment with padded backing, and outer MOLLE and hook-and-loop panels.

12" x 6" x 18" (305 x 152 x 457 mm)

28 Liter Capacity

GUN METAL /PVC-P836GM



UTG® TAC VEST & HOLSTERS



547 TACTICAL VEST

Girth 40"–54" (1016–1372 mm)

Height 22"–25" (559–635 mm)

RIGHT-HANDED /PVC-V547BT
LEFT-HANDED /PVC-V547BL



SPECIAL OPS TACTICAL THIGH HOLSTER

Integral spare magazine pouch, padded wraparound thigh pad, and adjustable nonslip leg strap with buckle closure.

Adjustable belt and retention strap with buckle closures.

Compatible with most compact to full size pistols.

RIGHT-HANDED /PVC-H178B



UNIVERSAL ANKLE HOLSTER

Breathable, padded, and reinforced neoprene construction.

Adjustable hook-and-loop retention with pull tab.

Synthetic panel overlay guards against compression and unwanted ingress into trigger guard.

Compatible with most J-frame and micro-compact pistols.

Height 11.5" (292 mm)

Calf Circumference 11.5"–19" (292–483 mm)

Ankle Circumference 11.5"–15.5" (292–394 mm)

AMBIDEXTROUS /PVC-H191B



IWB BELT HOLSTER

Reinforced polyester construction with elastic hook-and-loop retention and 1.5" steel belt clip.

Compatible with most sub-compact and micro-compact pistols.

RIGHT-HANDED /PVC-H389B



BELT HOLSTER

Adjustable hook-and-loop and snap-on thumb break retention.

Reinforced and padded construction with integral spare magazine pouch.

Compatible with most compact to full size pistols.

AMBIDEXTROUS /PVC-H288B



BELT HOLSTER

Reinforced stitching and construction with integral spare magazine pouch.

Adjustable quick-release buckle retention.

Compatible with most compact to full size pistols.

RIGHT-HANDED /PVC-H270B

UTG® LONG GUN SLINGS & BELTS

BOLLA® 2 TO 1 POINT CONVERSION SLING

Sling tensions adjusts by pulling slider forward to increase slack and rearward to decrease.

Length 42"–58" (1067–1473mm)

QD SLING SWIVEL /PVC-GB508B



SINGLE POINT BUNGEE SLING

Length 42”–58” (1067–1473mm)

QD SLING SWIVEL /PVC-GB507B



TWO POINT UNIVERSAL RIFLE SLING

1.5” width nonslip textured webbing.

Length 44"–52" (1118–1321mm)

TRADITIONAL SLING LOOPS /PVC-GB605



LAW ENFORCEMENT AND SECURITY DUTY BELT

Length 30”–52” (762–1321mm)

2" BELT WIDTH /PVC-B950-A



INDEX

A

AIR11834..... 34
AIR11834Q..... 35
AIR11850..... 34
AIR11850Q..... 35
AIR12234..... 34
AIR12250..... 34
AIR12250Q..... 35
AIR31834..... 34
AIR31850..... 34
AIR320MOA..... 35
AIR32234..... 34
AIR32234Q..... 35
AIR32250..... 34
AIR32250Q..... 35
AIR330MOA..... 35
AIR340MOA..... 35
AIR420MOA..... 35
AIR42250..... 34
AIR42270Q..... 35
AIR430MOA..... 35
AIR440MOA..... 35
AQR110..... 35
AQR115..... 35
AQR120..... 35
AQR310..... 35
AQR315..... 35
AQR322..... 35
AQR415..... 35
AQR420..... 35
AQR422..... 35
AQR432..... 35
AS601FA1..... 24

C

CHMP5E..... 11

F

FCR01..... 17
FCR02..... 17
FLR001..... 17
FLR002..... 17
FUR001..... 17
FUR001..... 17

I

IX603FA2..... 21
IX603FM1..... 21
IX606FM1..... 21
IX606FM2..... 21
IX645FM1..... 21
IX645FM2..... 21
IX801FA1..... 21
IX801FM3..... 21
IXF45SA4-65..... 23
IXF45SA4-7..... 23
IXLR01..... 23
IXSS01..... 23
IXSS02..... 23

L

LT-ELP120R..... 58
LT-ELP38Q-A..... 58
LT-ELP39Q-A..... 58

M

MNT-16AD2-C..... 62
MNT-755..... 40
MNT-757..... 40
MNT-914V2..... 37
MNT-955..... 40
MNT-957..... 40
MNT-ARMGB01..... 62
MNT-DG02Q..... 52
MNT-DT2PW01..... 38
MNT-DTW145..... 38
MNT-EL228GPQ-A... 58
MNT-P501..... 60
MNT-P503..... 60
MNT-P505..... 60
MNT-PMTOWL-A..... 38
MNT-RM700..... 37
MNT-RM700S..... 37
MT-745..... 40
MT-750X..... 40
MT-754X..... 40
MT-945..... 40
MT-950RS03..... 40
MT-950X..... 39
MT-AFGK01..... 53
MT-AFGK01B..... 53
MT-AFGK01R..... 53
MT-AFGM01..... 53
MT-AFGM01B..... 53
MT-AFGM01R..... 53
MT-AFGP01..... 53
MT-FGK01..... 52
MT-FGM01..... 52
MT-FGM01X..... 52
MT-FGP01..... 52
MT-FGP01X..... 52
MT-MB590..... 37
MT-MB590M..... 37
MT-MP45..... 60
MT-RM870..... 37
MT-RMR13C..... 38
MT-RMR45..... 38
MT-RMRAC..... 38
MT-RMRGL..... 38
MT-RMRKIT..... 38
MT-RMRXS..... 38
MT-RSX1L..... 37
MT-RSX1S..... 37
MT-RSX20MOA..... 37
MT-RSX5L..... 37
MT-RSX5S..... 37
MT-RSX7L..... 37
MT-RSX7S..... 37
MT-RSX8L..... 37
MT-RSX8S..... 37
MT-RTF1..... 35
MT-RTF3..... 35
MT-RTF4..... 35
MT-RTR1..... 35
MT-RTR3..... 35
MT-RTR4..... 35
MT-T113C..... 38
MT-T1AC..... 38
MTU001..... 43
MTU001SSM..... 43
MTU001T..... 43
MTU007..... 43
MTU009..... 14
MTU011..... 14
MTU015..... 43
MTU015SSM..... 43
MTU016..... 14
MTU019SSM..... 42
MTU019SSM3..... 42
MTU019SSMD..... 42
MTU028SG..... 37
MTU029SG..... 37
MTU030T22..... 37
MTU045SEM..... 42
MTU045SPM..... 42
MTU045XLM..... 41
MTU046SEM..... 42
MTU046SPM..... 42
MTU046XLM..... 41
MTU047SEM..... 42
MTU047SPM..... 42
MTU047XLM..... 41
MTU048SEM..... 42
MTU049SEM..... 42
MTU050SSM..... 43
MTU053SSM..... 14
MTU055SSM..... 10
MTU055SSME..... 10
MTU055SSMK..... 10
MTU055SSMKSD..... 10
MTU055SSMSD..... 10
MTU056..... 11
MTU058SSM..... 11
MT-UAK01..... 14
MTURS09M..... 60
MTURS09S..... 60
MTURS10M..... 60
MTURS10S..... 60
MTURS11..... 60

O

OP3-G1563CRWQ.... 26
OP3-GM3124UMOA... 25
OP3-GM4164UMOA... 25
OP3-SW080..... 25
OP-DS2018R..... 30
OP-DS2521R..... 30
OP-RDM20CT..... 31
OP-RDM20CTS..... 31
OP-RDM20G..... 31
OP-RDM20R..... 31
OP-RMR20CTS..... 31
OP-RMR20R..... 31
OT-RDM16R..... 31

P

PVC-B950-A..... 66
PVC-GB507B..... 66
PVC-GB508B..... 66
PVC-GB605..... 66
PVC-GC01..... 65
PVC-H178B..... 66
PVC-H191B..... 66
PVC-H270B..... 66
PVC-H288B..... 66
PVC-H389B..... 66
PVC-KIS28B..... 64
PVC-KIS38B2..... 64
PVC-MC25B-A..... 64
PVC-MC32B-A..... 64
PVC-MC34B-A..... 64
PVC-P365B..... 65
PVC-P836GM..... 65
PVC-PC01B..... 65
PVC-PC02B..... 65
PVC-PC05B..... 65
PVC-PC380..... 65
PVC-PSP30BN..... 64
PVC-PSP34B..... 64
PVC-PSP34BG..... 64
PVC-PSP34BN..... 64
PVC-V547BL..... 66
PVC-V547BT..... 66

R

RB-A005..... 63
RB-CSF06..... 63
RB-FGM01..... 52
RB-FGRP168B..... 52
RB-FGRP170B..... 52
RB-FGRP172B..... 52
RB-HP30M..... 60
RB-T308FB..... 50
RB-T469B..... 50
RB-T6BFH2..... 49
RB-T6BFHC..... 49
RBT-AKM30..... 14
RBT-AKM30..... 57
RBT-AM10..... 56
RBT-AM30..... 56
RBT-AM30D..... 56
RBT-APG01B..... 51
RBT-CMP01..... 60
RBT-DM25..... 56
RBT-GL915-A..... 55
RBT-GL917-A..... 55
RBT-GL933..... 55
RBT-PD933-A..... 55
RB-TPG172B..... 51
RBT-TKSDC..... 62
RBU47FS01..... 13
RBU47FS02..... 13
RBU6BM..... 50
RBUAM01..... 56
RBUPG01B..... 51
RBUPG01D..... 51
RBUS1BM..... 50
RBUS1BMS..... 50
RBUS1DMS..... 50
RBUS2BM..... 50
RBUS2BMS..... 50
RBUS3BM..... 50
RBUS3BMS..... 50
RBUS3DM..... 50
RBUS4BM..... 50
RBUS4BMS..... 50
RBUS4DMS..... 50
RDM-2045..... 38
RDM-20AC..... 38
RDM-20GL..... 38
RDM-20XSD..... 38
RDU012515..... 34
RDU012520..... 34
RDU013010..... 34
RDU013015..... 34
RDU013022..... 34
RG2W1104..... 36
RG2W1154..... 36
RG2W1204..... 36
RG2W3104..... 36
RG2W3154..... 36
RG2W3224..... 36
RG-FL138..... 58
RG-FL27KC..... 58
RG-FL27MC..... 58
RGPM-25H4..... 36
RGPM-25M4..... 36
RGPM2PA-25H4..... 36
RGPM2PA-25M4..... 36
RGPM-30H4..... 36
RGPM-30M4..... 36
RGPMOFS38-25H4... 36
RGWM-25H4..... 36
RGWM-25L2..... 36
RGWM-25M4..... 36
RGWM-30H4..... 36
RGWM-30L4..... 36
RGWM-30M4..... 36
RI34135C..... 23
RI34135C..... 34
RWU012510..... 34
RWU012515..... 34
RWU012520..... 34
RWU013010..... 34
RWU013015..... 34
RWU013022..... 34
RWU013408..... 34
RWU013415..... 34
RWU013420..... 34

S

SCP-27PRGW..... 26
SCP3-18IEBG4..... 25
SCP3-274LAOIEW... 26
SCP3-U416AOIEW... 25
SCP3-UM312AOIEW.. 25
SCP3-UM416AOIEW.. 25
SCP-A1245-A..... 40
SCP-DS3026W..... 32
SCP-DS3039W..... 32
SCP-DS3840TDQ.... 32
SCP-DS3840W..... 32
SCP-ES403..... 25
SCP-LS200..... 58
SCP-LS279S-A..... 58
SCP-LS289S..... 58
SCP-M312AOD..... 25
SCP-M312AOWQ..... 25
SCP-M392AOLWQ.... 25
SCP-M4CR5WQ..... 26
SCP-MF3WEQS..... 32
SCP-RD40RGW-A.... 32
SCP-RG40CDQ..... 32
SCP-SW060B..... 25
SCP-SW080B..... 25
SCP-TDTDQ..... 32
SCP-U4164AOIEW... 26
SCP-U6245AOIEW... 26
SCP-WEA05..... 63

T

TL-A041..... 63
TL-ARWR01..... 63
TL-ARWR02..... 63
TL-BP01-B..... 47
TL-BP02-B..... 47
TL-BP03-B..... 47
TL-BP20Q-A..... 48
TL-BP78..... 48
TL-BP78Q..... 48
TL-BP88..... 48
TL-BP88Q..... 48
TL-BP98Q..... 48
TL-BPAD1..... 48
TL-BPAD2..... 46
TL-BPDM01..... 47
TL-BPDM02..... 47
TL-BPDM03..... 47
TL-BPFS01-A..... 46
TL-BPFS02ARC..... 46
TL-BPFS02Q..... 46
TL-BPFS03ARC..... 46
TL-BPFS03Q..... 46
TL-BPM01-B..... 47
TL-BPM02-B..... 47
TL-BPM03-B..... 47
TL-BPOB01-A..... 46
TL-EX223..... 63
TL-EX308..... 63
TL-HS02B..... 53
TL-HSK01..... 53
TL-HSK01B..... 53
TL-HSK01R..... 53
TL-HSM01..... 53
TL-HSM01B..... 53
TL-M47SR..... 14
TL-QDSW08A..... 61
TL-QDSW08B..... 61
TL-QDSW08C..... 61
TL-QDSW18..... 61
TL-QDSW38..... 61
TL-SHWR01..... 63
TL-SWMTP01..... 61
TL-SWPK01..... 61
TL-SWPM01..... 61
TL-T6TD03..... 62
TLT-A2KT..... 49
TLT-CSCH01..... 63
TLT-CSCH01B..... 63
TLT-CSCH01R..... 63
TLT-CSSLT01..... 63
TLT-CSSLT01B..... 63
TLT-CSSLT01R..... 63
TL-TRM01..... 53
TL-TRM01B..... 53
TL-TRM01R..... 53
TLT-TKS01..... 62
TLT-TKSBC..... 62
TLT-TKSLT..... 62
TLT-TKSLTB..... 62
TLT-TKSLTR..... 62
TLT-TKSMR..... 62
TLT-TKSMRB..... 62
TLT-TKSMRR..... 62
TLT-TKSTG..... 62
TLT-TKSTGB..... 62
TLT-TKSTGR..... 62
TLU001..... 49
TLU001D..... 49
TLU001D-KIT..... 49
TLU001-KIT..... 49
TLU001MS..... 49
TLU002..... 49
TLU008..... 49
TLU008-KIT..... 49
TLUBP01..... 47
TLUBP01M..... 47
TLUBP02-A..... 47
TLUBP02M-A..... 47
TLUFS55..... 40
TLUMA01..... 59
TLUMA02..... 59
TLUMA03..... 59
TLUMA04..... 59
TLURS001..... 39
TLURS55..... 40
TLUSW001..... 61
TLUSW002..... 61

Third party trademarks may be used in this catalog for the convenience of customers to indicate the fit or compatibility of the applicable Leapers items.

For Patent Information, please visit:

www.leapers.com/patents

LEAPERS.COM



LEAPERS®

MICHIGAN USA

OUR BRANDS

UTG® PRO · INTEGRIX® · ACCUSHOT PRO™ · UTG®

	USA HEADQUARTERS UTG PRO PLANT	UTG TAIWAN R&D CENTER	UTG CHINA	UTG EUROPE
ADDRESS	32700 Capitol Street, Livonia, MI 48150, U.S.A.	No.36, Qunyi Rd., Zhunan Township, Miaoli County 350, Taiwan	No.988 Xingyu Road, Nantong, Jiangsu, China	Am Bahndamm 7, 63683 Ortenberg, Germany
TELEPHONE	+ 1 734-542-1500	+ 886 (0) 37 580333	+ 86 (0) 513 81503888	+ 49 (0) 6041-969686 0
FAX	+ 1 734-542-7095	+ 886 (0) 37 580337	+ 86 (0) 513 55880076	+ 49 (0) 6041-969686 66
EMAIL	office@leapers.com	conseil@utg-taiwan.com	office@leapers.com	info@utgeurope.com
WEBSITE	www.leapers.com	www.utgtaiwan.com	www.utg.com.cn	www.utgeurope.com

LEAPERS_INC · INTEGRIXOPTICS · UTGPRO · LEAPERS_INC · LEAPERS · LEAPERS-INC-