


SCHMIDT BENDER

PRODUCT CATALOGUE v2019.01



PRECISION MAKES THE DIFFERENCE!

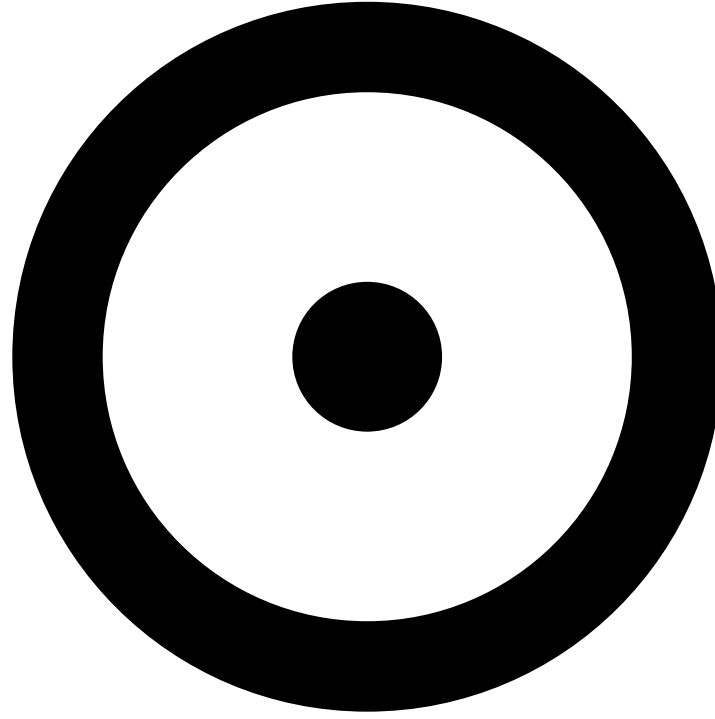

SCHMIDT BENDER HISTORY



Founders: Helmut Bender and Helmut Schmidt

L-R Werner Schmidt, Helmut Bender, Richard Schäfer, Dieter Seipp, Werner Schmidt & Helmut Schmidt

Schmidt & Bender has maintained a long track record as a pioneer in Quality and Precision, as well as Tradition and Innovation. These are synonyms for a company with a global name for ultra-high-quality riflescopes. We believe it is only those companies who determine to set themselves challenges that will experience the successful performance levels that only elite quality development and production can achieve.


Time after time, Schmidt & Bender measures itself against the best in the sector of the industry – and we do so very successfully. The overarching goal of our design and development work is to achieve our uncompromising quality targets. The manifest outcome is that we meet the highest standards of quality in all categories of riflescope development: riflescopes that set new technical standards and precision devices that impressively demonstrate our philosophy, ‘Precision Makes the Difference’!

Those committed to quality will be delighted by Schmidt & Bender riflescopes. Our sporting products are built to service the various needs and applications for hunting, long-range hunting, sporting, and competition. Our tactical products are designed and manufactured to best service the stringent specifications dictated by elite police and military forces around the globe. Schmidt & Bender assures our ongoing commitment to these quality standards. This conviction is realized through the provision of superior technology and through setting the ultimate standards of quality that others are measured against.

Furthermore, it is our conviction to quality that has earned us multiple and repeat United States Special Forces awards, in the form of contracts, for various models of our PM II tactical riflescopes. In addition to this, we are both honored and pleased to provide PM II riflescopes to Police and Military Forces around the globe. We encourage you to shoot Schmidt & Bender riflescopes – and experience the ultimate in precision shooting success.

As we move forward into 2019, Schmidt & Bender aims to set new goals for the purpose of creating a stronger business and brand in the world. We hope you enjoy the catalogue, and we suggest that you also visit our website at www.schmidt-bender.com to find out more about our products and locate your nearest stocking dealer.

SCHMIDT BENDER

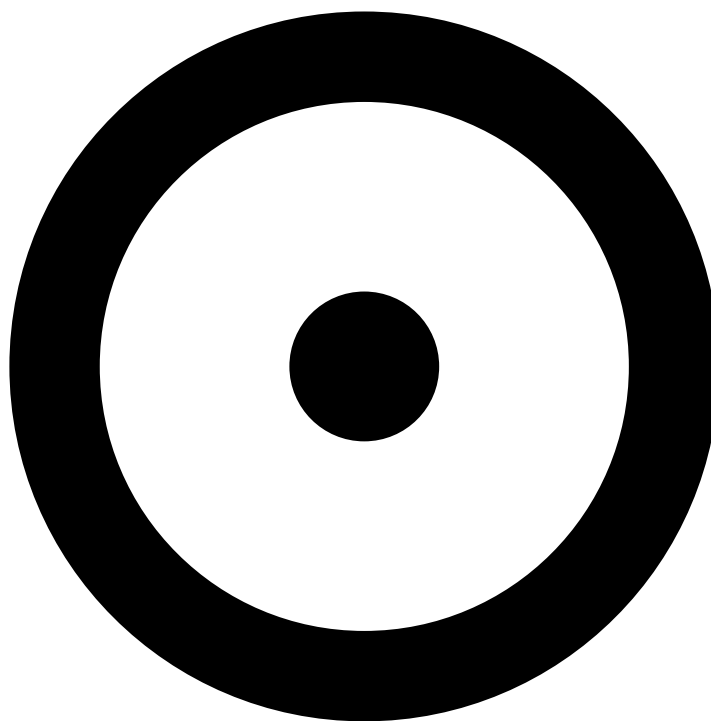

PRECISION MAKES THE DIFFERENCE!

Subject to errors and technical modifications. The General Terms and Conditions of Schmidt & Bender GmbH & Co. KG will apply. Sales and distribution via special dealers only.
ID: 971-222-013 | © Schmidt & Bender GmbH & Co. KG

| | |
|---------------------------------|----|
| HUNTING MODELS | 5 |
| Klassik | 6 |
| Zenith | 8 |
| Stratos | 11 |
| Exos | 13 |
| Polar T96 | 15 |
| Hunting Features | 18 |
| Hunting Reticles | 19 |
| PM II/COMPETITION MODELS | 21 |
| PM II ShortDot | 22 |
| PM II Ultra Short | 24 |
| PM II Ultra Bright | 26 |
| Exos (TMR) | 28 |
| PM II | 29 |
| PM II High Power | 34 |
| PM II Reticles | 36 |
| New Products | 37 |
| PM II Turret adjustments | 38 |
| Field Target II | 41 |
| Accessories | 42 |
| Specifications | 44 |
| Digital BT Concept | 51 |

HUNTING

The hunting riflescopes from Schmidt & Bender are divided into several families and models. These cover many hunting applications while accommodating various price classes. Each offers the premium standards of quality you have come to demand from Schmidt & Bender.

APPLICATION ICONS




RAISED HIDE




STALKING



DRIVEN HUNT



3-GUN & IPSC



TARGET SHOOTING

HUNTING RIFLE APPLICATION ICONS



ULTRA-LIGHT



HUNTING



LONG-RANGE



4-16x50 Klassik



2.5-10x56 Klassik



1.1-4x24 Zenith



3-12x50 Zenith



2.5-10x56 Zenith



1.5-8x42 Stratos



2.5-13x56 Stratos



1-8x24 Exos/TMR



3-21x50 Exos



NEW



2.5-10x50 Polar T96



3-12x54 Polar T96




4-16x56 Polar T96





RETICLE OPTIONS - FIRST FOCAL PLANE



A7

P3

4-16x50 Klassik

FEATURES

30
mm4
ZOOMP
PARALLAX
↔

OPTIONS

CT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATION

The big magnification, in combination with brilliant optics and the comfortable parallax compensation provides the hunter with the best equipment available for the hunting of sensitive game. Even at distances of 400–500 m this special scope has already proven its practical use. Besides hunting, this scope is also used very successfully in sport shooting/competition events.

INTENDED APPLICATIONS



HUNTING



LONG-RANGE




CLASSIC TURRET ADJUSTMENTS



CLASSIC ELEVATION BDC TURRET



RAISED HIDE




TARGET SHOOTING

For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.



RETICLE OPTIONS - FIRST FOCAL PLANE



L7F

2.5-10x56 Klassik

This scope is your ideal choice, when hide hunting for wild boars at night and for every hunting situation inhibited by poor lighting conditions. The large lens diameter helps the scope to make the best use of the last remaining light. Many hunters are surprised by the image brightness and contrast this scope generates, even in comparison to high-quality binoculars.

FEATURES

30
mm4
ZOOM

OPTIONS

CT
CAPPED
TURRET

INTENDED APPLICATIONS



HUNTING



RAISED HIDE



STALKING



DRIVEN HUNT



CLASSIC TURRET ADJUSTMENTS


For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.






RETICLE OPTIONS - SECOND FOCAL PLANE



FD7



FD0

1.1-4x24 Zenith

FEATURES

30
mm4
ZOOMFD
FLASHDOT

AUTO OFF

OPTIONS

LMZ
LIGHT METAL
WITH Z-RAILCT
CAPPED
TURRET

In this Zenith scope the reticle is located in the second focal plane, therefore not changing when using the magnification. The big field of view (36 m/100 m) makes this scope the ideal selection for the quick shot on fleeting game. With more training the hunter may, when aiming at short distances, leave both eyes open, thus always remaining on top of things. The scope will be an ideal support for the hunter during driven wild boar or buffalo hunting or when hunting other game that is well able to defend itself.

INTENDED APPLICATIONS




ULTRA-LIGHT



HUNTING



POSICON TURRET ADJUSTMENTS



VERSION WITH LMZ-RAIL




STALKING



DRIVEN HUNT



RETICLE OPTIONS - FIRST FOCAL PLANE



FD7 P3 MilDot FD



3-12x50 Zenith

FEATURES

30
mm

4
ZOOM



FD
FLASHDOT

AUTO OFF

OPTIONS

LMZ
LIGHT METAL
WITH Z-RAIL

CT
CAPPED
TURRET


BDC
BULLET DROP
COMPENSATION

With its large magnification power the 3-12x50 Zenith permits the hunter to make accurate shots at long distances and to hunt for rather small targets. On top of that, with its enhanced luminous sensitivity the scope is qualified in particular for the use at dusk. With its harmonic form the scope will give each rifle a very defined and sleek appearance.

INTENDED APPLICATIONS



HUNTING



LONG-RANGE



RAISED HIDE



STALKING




DRIVEN HUNT



POSICON TURRET ADJUSTMENTS



CLASSIC ELEVATION BDC TURRET



VERSION WITH LMZ-RAIL

For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.





RETICLE OPTIONS - FIRST FOCAL PLANE



FD7



FEATURES

30
mm4
ZOOMFD
FLASHDOT

AUTO OFF

OPTIONS

LMZ
LIGHT METAL
WITH Z-RAILCT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATION

2.5-10x56 Zenith

The 2.5-10x56 Zenith that won the iF DESIGN AWARD in 2003 is a compact and at the same time very powerful scope. With its magnification of up to 10x and a lens diameter of 56 mm it is perfectly suited for hide hunting by night and when hunting under poor light conditions. Due to its rather short design the scope is particularly suited for retrofitting on older rifles and on already existing mounts.

INTENDED APPLICATIONS



HUNTING



RAISED HIDE



STALKING




DRIVEN HUNT



POSICON TURRET ADJUSTMENTS



CLASSIC ELEVATION BDC TURRET



VERSION WITH LMZ-RAIL

For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.



RETICLE OPTIONS - FIRST FOCAL PLANE



1.5-8x42 Stratos

30
mm

5
ZOOM



FD
FLASHDOT



FEATURES

OPTIONS


LMZ
LIGHT METAL
WITH Z-RAIL

CT
CAPPED
TURRET

BDC
BULLET DROP
COMPENSATION

The 1.5-8x42 Stratos is a universal, super fast scope for every conceivable application featuring an ultra-bright FlashDot in the first focal plane. The scope features a large sized exit pupil for fast target acquisition. Its harmonic exterior design makes the scope the ideal selection for high-quality hunting rifles.

INTENDED APPLICATIONS



ULTRA-LIGHT



HUNTING



STALKING




DRIVEN HUNT



POSICON TURRET ADJUSTMENTS



LOCKABLE ELEVATION BDC
TURRET (BDC II)



VERSION WITH LMZ-RAIL


For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.





RETICLE OPTIONS - FIRST FOCAL PLANE



FD7

2.5-13x56 Stratos

30
mm5
ZOOM

FEATURES



OPTIONS



The 2.5-13x56 Stratos is a very powerful super fast scope for the raised hide in broad daylight and at night, featuring an ultra-bright FlashDot in the first focal plane. In addition, this scope offers an optional bullet drop compensation (BDC II) for long distance shooting.

INTENDED APPLICATIONS



HUNTING



LONG-RANGE



RAISED HIDE




STALKING



DRIVEN HUNT



POSICON TURRET ADJUSTMENTS

LOCKABLE ELEVATION BDC
TURRET (BDC II)


VERSION WITH LMZ-RAIL

For more detailed adjustment information, please see page 18.


Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - SECOND FOCAL PLANE



FD7



FD0



CQB2

EXOS TMR



1-8x24 Exos

Few can stand their ground as a true 'Lone Wolf'.


Enter the exclusive Exos 1-8x24 rifle scope with a true 1x magnification setting and a true 8x zoom magnification range. At the 1x setting, the hunter can have both eyes open while looking through and beyond this brilliant optical sight – ever so important for dangerous game hunting. The Exos serves double duty as a 2-in-1 function for both dangerous game as well as distant and fleeting game. In a 1-8x rifle scope, none other can truly compare!

EXOS TMR – perfect for CQC and 3-Gun

See further information on page 28.



POSICON TURRET ADJUSTMENTS

LOCKABLE ELEVATION BDC
TURRET (BDC II)

VERSION WITH LMZ-RAIL

FEATURES

30
mm8
ZOOMFD
FLASHDOTCC
CLOSE
COMBAT
MODE

AUTO OFF

-25°

OPTIONS

LMZ
LIGHT METAL
WITH Z-RAIL

POSICON

CT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATIONTHROW LEVER
COMPATIBLE

INTENDED APPLICATIONS



ULTRA-LIGHT




HUNTING



STALKING



DRIVEN HUNT



3-GUN & IPSC


For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.





RETICLE OPTIONS - SECOND FOCAL PLANE



FEATURES

34
mm7
ZOOMD
DIFFRACTIVEBDC
BULLET DROP
COMPENSATION

AUTO OFF

P
PARALLAX

3-21x50 Exos

The 3-21x50 Exos is the latest addition to the Exos line. The focus is on intuitive functionality, such as 11-step illumination technology including an automatic switch-off and the reliability of all components. The 'S-Spring Technology' developed by Schmidt & Bender stands for a precise and repeatable bullet drop compensation (BDC) with precise tactile clicks. Our integrated locking mechanism excludes unintentional adjustment. The 3-21x50 Exos is equipped with a second focal plane illuminated reticle suitable for daylight and convinces at short distances for the quick shot as well as for the precise long-range hunting shot. The patented 'Minimum Deviation System' ensures that any possible deviation from the point of impact is minimal. This makes the new Exos an ideal companion and a real all-rounder for all hunting situations.

INTENDED APPLICATIONS



HUNTING



LONG-RANGE



NEW LOCKABLE SINGLE TURN II

CAPPED FLAT WINDAGE ADJUSTMENT
WITH A ZERO CLICK (ZC)

RAISED HIDE




STALKING

For more detailed adjustment information, please see pages 39 to 40.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - SECOND FOCAL PLANE



D7

RETICLE OPTIONS - FIRST FOCAL PLANE



L7



2.5-10x50 Polar T96

34
mm4
ZOOM96%
TransmissionD
DIFFRACTIVE

AUTO OFF

LMZ
LIGHT METAL
WITH Z-RAILCT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATION

FEATURES

OPTIONS

Schmidt & Bender ushers in a new era of high-transmission scopes with the 'Polar' scope line. Never before has a transmission of over 96 % been achieved with a 4x zoom variable scope. Only this makes it possible to use the very last light of the evening for a successful hunt at dusk. The 2.5-10x50 Polar is an ideal scope for the raised hide. With its 34 mm tube and the optional lockable elevation BDC turret, it offers an unbelievable adjustment range for long-distance shots.

INTENDED APPLICATIONS



HUNTING



RAISED HIDE




STALKING



DRIVEN HUNT



POSICON TURRET ADJUSTMENTS

LOCKABLE ELEVATION BDC
TURRET (BDC II)

VERSION WITH LMZ-RAIL


For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.






RETICLE OPTIONS - SECOND FOCAL PLANE




D7

RETICLE OPTIONS - FIRST FOCAL PLANE



P4FL



L7

3-12x54 Polar T96

34
mm4
ZOOM96%
TransmissionD
DIFFRACTIVE

AUTO OFF

FEATURES

OPTIONS

LMZ
LIGHT METAL
WITH Z-RAILP
PARALLAXCT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATION

With its transmission of more than 96 %, the 3-12x54 Polar T96 is the ideal riflescope for use at the raised stand in the evening and for shooting at medium distances. An optimized optional parallax adjustment and dusk-proof reticles in the first or second focal plane coupled with the optional lockable elevation BDC turret device make this riflescope a real highlight that leaves nothing more to be desired. The comfortable field of view of 12.5 m/100 m and large, 12 mm exit pupil ensure a good overview at any time. With its new, attractive design including more rounded edges and a high-quality all-metal construction, this riflescope is a real eye-catcher on any weapon.

INTENDED APPLICATIONS




HUNTING



LONG-RANGE



POSICON TURRET ADJUSTMENTS

LOCKABLE ELEVATION BDC
TURRET (BDC II)


VERSION WITH LMZ-RAIL



RAISED HIDE



STALKING




TARGET SHOOTING

For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - SECOND FOCAL PLANE



D7

RETICLE OPTIONS - FIRST FOCAL PLANE



P4FL

L7

4-16x56 Polar T96

34
mm4
ZOOM96%
TransmissionP
PARALLAX
↔D
DIFFRACTIVE⏻
AUTO OFFLMZ
LIGHT METAL
WITH Z-RAILCT
CAPPED
TURRETBDC
BULLET DROP
COMPENSATION

For those disciplined to hunt the prime and precious first and last minutes of legal light, the 4-16x56 Polar defines with its light transmission value of at least 96 %, a new standard of low-light hunting. Dark timber and overcast days are no match for the Polar, as it always yields a brilliant image. Rich in features, the 4-16x56 Polar offers various configurations and options, and it is available with first and second focal plane illuminated reticle designs. One highlight for sure is the popular P4FL reticle in FFP which makes this scope ideal for hunting and for competition shooting alike.

INTENDED APPLICATIONS




HUNTING



LONG-RANGE




POSICON TURRET ADJUSTMENTS

LOCKABLE ELEVATION BDC
TURRET (BDC II)

VERSION WITH LMZ-RAIL



RAISED HIDE



TARGET SHOOTING

For more detailed adjustment information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.





Posicon Turret Adjustments

Posicon adjustments are color-coded and enable you to identify the position of the adjustment of the reticle within the scope at a glance. This is truly a unique feature to Schmidt & Bender and serves as yet another gauge to our commitment to superb engineering and quality standards.

Beneath the capped turret, the Posicon finger adjustable turret serves as a valuable indicator while sighting in rifles.

With the indicator in the green range, the reticle is inside the square, or ideal, adjustment range, eliminating any possibility of binding the adjustment within the scope body.

The red range indicates adjustment settings are in the reserved, but usable, limits. At the same time, it serves as a warning that use of this reserve precludes the use of the full range of adjustment in the opposing adjustment's direction (e.g., elevation vs. windage travel adjustment).

This means that the gunsmith or hunter is informed when zeroing in the rifle that there is still sufficient adjustment range available in each direction. After the rifle has been sighted in, the silver perimeter ring, with an index mark, can be rotated to serve as a zero indicator.




Classic Turret Adjustments

To make the position of the reticle visible in the available adjustment range, the rotational display was developed.

The display on the turrets for height/elevation and lateral/windage adjustment shows the position of the reticle in the form of a black dot in its white window.

Before zeroing the riflescope on the rifle, the user can check at a glance to ensure that the black dot is located under the letter M (for Midpoint/Middle).

This ensures that there is a uniformly large adjustment range to all sides for zeroing the sights.



Version with LMZ-Rail

The scopes in the Polar T96, Stratos, Exos and Zenith lines can also be ordered in a version with rail mounting possibility. A common solution is the LMZ (Light Alloy Zeiss Compatible)-rail with an internal prism.

Bullet Drop Compensation (BDC) Turret

BDC adjustments are used to quickly adjust the reticle position to another distance beyond the original zero without removing the elevation caps. These are primarily suited to long-distance shooting or hunting. With one simple movement, it is possible to adjust the reticle to enable accurate hits on distant targets. The Classic BDC design affords a simple procedure for the initial sight-in period. The Classic BDC can be released easily using the coin slot and then reset to zero.

New lockable elevation and windage BDC II Turrets

The new lockable adjustment is released with a conventional Allen key, and a retaining screw prevents the adjustment cap from getting lost.



Classic Elevation BDC turret



Lockable elevation BDC turret (BDC II)

Diffractive Reticle


The diffractive reticle technology is used to enable a very bright and distinct point of illumination to be maintained in the center of the second focal plane reticle.

In contrast to the FlashDot, this is not a projection via a beam splitter. Instead, it works by deflecting light onto an ultra-thin grid. As a consequence, the center dot does not disappear when switched off, but it does achieve the same brightness as the FlashDot without reducing light transmission as a result of the longer distance through the lens in the beam splitter. Schmidt & Bender wants you to realize the true quality of the Polar T96 optical system and not lose that light transmission capability that you have paid for.


FlashDot Technology

The FlashDot illumination system is a projection from a beam splitter and allows an exceptionally clear and well-defined illuminated center dot. It enables the hunter to cleanly and accurately acquire the target via an illuminated center dot. This dot is visible in both daylight and at night. The illuminated stages range from nighttime operation to ultra-bright for daylight use. Regardless of the ambient light, the dot always renders a discreet, clean and distinct circular image. This allows for the aiming point to not be distracting, but rather accurate and easy on the eye. When the illuminated dot is not required, it will vanish completely, while the reticle and target may be viewed clearly without shadows or interfering lines. This is a major benefit for those in need of aiming reference illumination.

HUNTING AND COMPETITION FIRST FOCAL PLANE (FFP) RETICLES

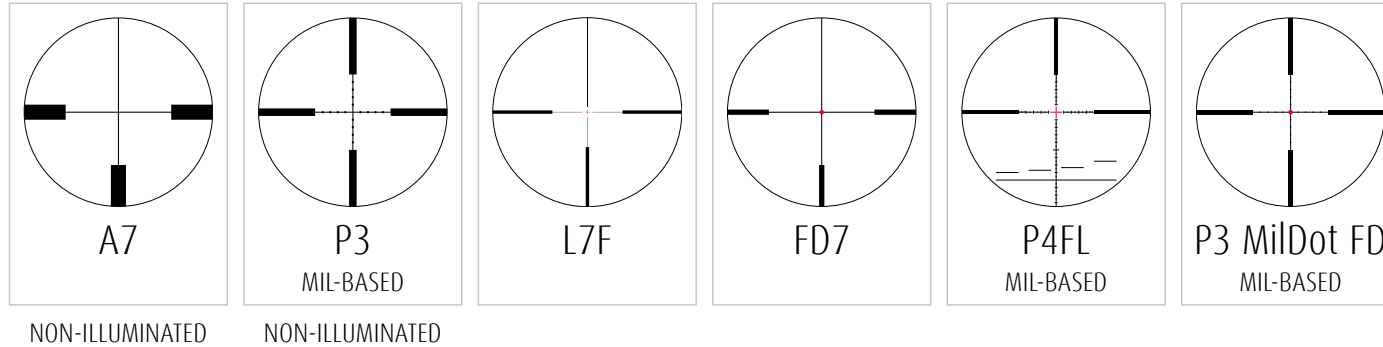

HUNTING SECOND FOCAL PLANE (SFP) RETICLES

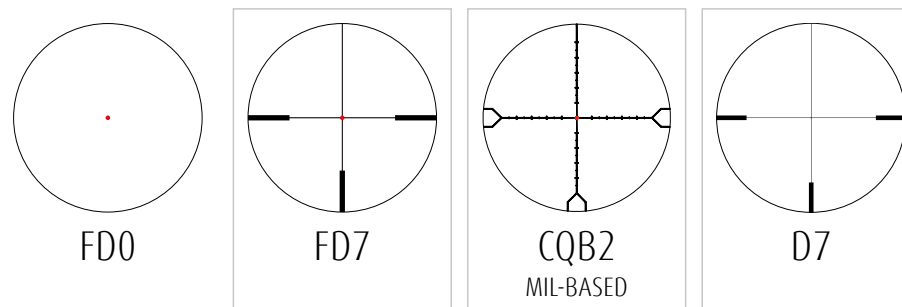

PM II MODELS

APPLICATION ICONS



LE & TACTICAL



3-GUN & IPSC



TARGET SHOOTING

Schmidt & Bender PM II are intended for use by police, military and competition shooters worldwide.

They are developed in close collaboration with various Special Forces from Police and Military as well as competition shooters around the globe. All PM II riflescopes share outstanding reliability and precision, enabling the perfect shot over short, medium, long and ultra-long distances.

The versatile riflescopes in the PM II product line cover every conceivable application scenario: from the use of a

PM II ShortDot scope on an assault rifle in house-to-house combat or 3-Gun & IPSC Competition to the use of a PM II High Power riflescope on a .50 BMG to engage tactical targets over extremely long distances and Ultra Long-Range Shooting Competition (ELR, KO2M etc.).


The world leadership role played by Schmidt & Bender PM II riflescopes was underscored significantly when it was used to win the Precision Sniper Rifle competition of the American Special Forces, drawn from Army, Navy, Air Force and Marine Corps back in 2011. Prior to that, the 3-12x50 PM II emerged as the victor from a two-year test conducted by the U.S. Marine Corps (USMC) involving 25 other products, after which it became the scope adopted

by the USMC. The riflescopes in the PM II lines fall into various subgroups. The products in the ShortDot line comprise the 'short' optical sights with either a 30 mm or 34 mm main tube, designed for use over short and medium distances. The other products in the PM II line comprise the optical sights using a 34 mm main tube for shooting over medium and long distances. These sights are available in a range of different variations in respect of their power zoom range, reticle placement design, and reticle illumination feature. This ensures that they can satisfy the most demanding needs associated with the harshest of applications. PM II riflescopes exceed the expectations of every customer when it comes to downrange performance and precision.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.



1-8x24 PM II ShortDot CC



1-8x24 PM II ShortDot Dual CC



NEW



3-20x50 PM II Ultra Short



5-20x50 PM II Ultra Short



3-12x54 PM II Ultra Bright



4-16x56 PM II Ultra Bright



1-8x24 Exos TMR



10x42 PM II



3-12x50 PM II



3-20x50 PM II



5-25x56 PM II



12-50x56 PM II



3-27x56 PM II High Power



5-45x56 PM II High Power



TACTICAL RIFLE APPLICATION ICONS



SHORT-RANGE



MID-RANGE



LONG-RANGE




**ULTRA
LONG-RANGE**





RETICLE OPTIONS - SECOND FOCAL PLANE



CQB2

1-8x24 PM II ShortDot CC

30
mm

8
ZOOM



FD
FLASHDOT

CC
CLOSE
COMBAT
MODE



-25°

ST
SINGLE TURN

LT
LOCKING
TURRETS

OPTIONS

RAL
COLOR YOUR
SCOPE

The 1-8x24 PM II ShortDot CC integrates a true red dot sight with the patented CC mode into one riflescope. Simply turn the magnification adjustment beyond the soft click at 1.1x to 'CC', and the system becomes parallax-free with a true 1x magnification for near distances of 7-10 m. The bright red dot in the second focal plane then serves as the aiming mark, while the fine CQB2 reticle is for tactical use at higher magnifications. All of this is accompanied by a generous eye box for quick acquisition.



Single Turn (ST) elevation and windage turret, with Locking Turret, with a Sub-Zero Click (SZC)


INTENDED APPLICATIONS




SHORT-RANGE



MID-RANGE



LE & TACTICAL



3-GUN & IPSC


For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

WINNER OF
THE G28
CONTRACT



FIRST FOCAL PLANE RETICLE COMBINED WITH RED DOT IN THE SECOND FOCAL PLANE



1-8x24 PM II ShortDot Dual CC

| FEATURES | | | | | | | | | | OPTIONS | |
|----------|----------------|--------------------|---------------|---------------|----------------------|--|--|--|--|-------------------------|----------------|
| 30 mm | 8 ZOOM | | D DIFFRACTIVE | DUAL | CC CLOSE COMBAT MODE | | | | | RAL COLOR YOUR SCOPE | 25m WATERPROOF |
| -46° | ST SINGLE TURN | LT LOCKING TURRETS | | ZC ZERO CLICK | | | | | | MTC MORE TACTILE CLICKS | |

This is a most technically advanced day scope, with a true 8x zoom, as well as a true 1x power setting. At 1x setting, it is an ideal both-eyes-open optical sight. When zoomed to 8x, the operator can easily identify and engage distant targets.

It incorporates a first focal plane Mil Dot-based reticle for accurate ranging and compensation for hold-offs, hold-under, and hold-over. It offers an adjustable intensity illumination in the form of a distinctive and highly visible center dot in the second focal plane. The elevation and windage turrets are lockable to protect the zero position against unintentional adjustment. These combined features create the most advanced multipurpose close combat and mid-range day scope design.



Ultra flat Single Turn with optional MTC and locking for elevation and Ultra flat Single Turn with a Zero Click (ZC) and locking for windage

F

For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

INTENDED APPLICATIONS




SHORT-RANGE



MID-RANGE



LE & TACTICAL




3-GUN & IPSC



WINNER
OF THE
US ARMY CSASS
CONTRACT




RETICLE OPTIONS - SECOND FOCAL PLANE



P3L

P4FL

RETICLE OPTIONS - FIRST FOCAL PLANE

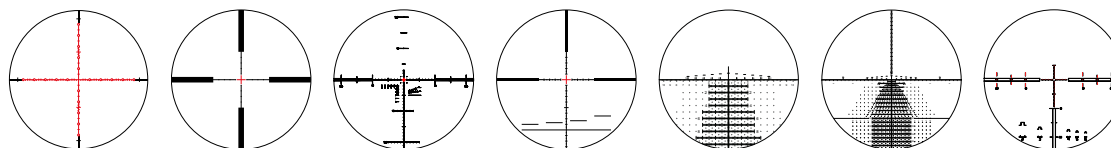

H2CMR

P3L

MSR2

P4FL


H59

Tremor3


MDR

3-20x50 PM II ULTRA SHORT

FEATURES

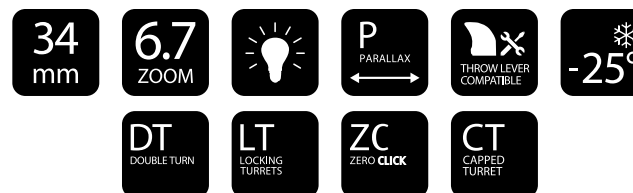

OPTIONS



The 3-20x50 PM II Ultra Short, with its 34.5 cm length, is the significantly shortened version of the normal 3-20x50 PM II. It was developed for use with attachments on short rifles. The low-profile elevation turret with a large 35 MIL/84 MOA adjustment range can easily be combined with a red dot sight for close distances. The precise parallax adjustment, the brilliant optical performance and a large field of view on low power makes this Ultra Short a perfect scope for medium- and long-range targets.

INTENDED APPLICATIONS



MID-RANGE



LONG-RANGE



E

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)




J

Capped flat windage adjustment with a Zero Click (ZC)



LE & TACTICAL




TARGET SHOOTING

For more detailed turret information, please see pages 38 and 39.


Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - FIRST FOCAL PLANE



P4FL



H59



Tremor3

5-20x50 PM II
ULTRA SHORT

The 5-20x50 PM II Ultra Short was developed for use with attachments on short rifles. With a length of less than 30 cm, it is a true lightweight and very popular among competition shooters. The low-profile elevation turret with a large 35 MIL/84 MOA adjustment range can easily be combined with a red dot sight for close distances. The precise parallax adjustment, the brilliant optical performance and a large field of view on low power makes this Ultra Short a perfect scope for medium- and long-range targets.

FEATURES



OPTIONS



INTENDED APPLICATIONS




MID-RANGE



LONG-RANGE



LE & TACTICAL



TARGET SHOOTING



D



E



J


For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.





RETICLE OPTIONS - FIRST FOCAL PLANE

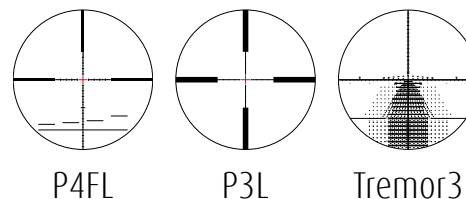


3-12x54 PM II ULTRA BRIGHT

FEATURES



OPTIONS



The new 3-12x54 PM II Ultra Bright is the first scope within the new PM II Ultra Bright line. Transmission is remarkable at more than 96 % and, combined with a field of view of 12.5 m/100 m, this scope is the ideal device for ambitious tactical and competition shooters. The focus is on precise shooting particularly under low light conditions at medium and long distances.

INTENDED APPLICATIONS



MID-RANGE



LONG-RANGE



E

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)




J

Capped flat windage adjustment with a Zero Click (ZC)



LE & TACTICAL




TARGET SHOOTING

For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - FIRST FOCAL PLANE

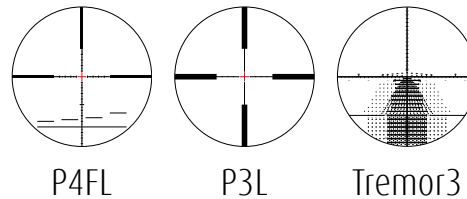


4-16x56 PM II ULTRA BRIGHT

The new 4-16x56 PM II Ultra Bright is the second scope within the new PM II Ultra Bright line. Transmission is remarkable at more than 96 % and, combined with a field of view of 9.4 m/100 m, this scope is the ideal device for ambitious tactical and competition shooters. The focus is on precise shooting particularly under low light conditions at medium and long distances.

FEATURES

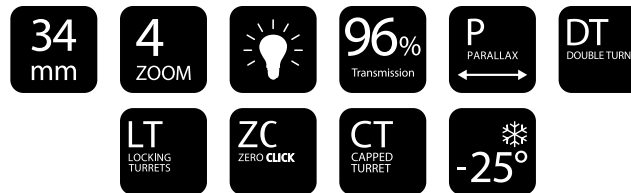


OPTIONS



INTENDED APPLICATIONS



LE & TACTICAL



TARGET SHOOTING



Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)



Capped flat windage adjustment with a Zero Click (ZC)


For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.






RETICLE OPTIONS - SECOND FOCAL PLANE

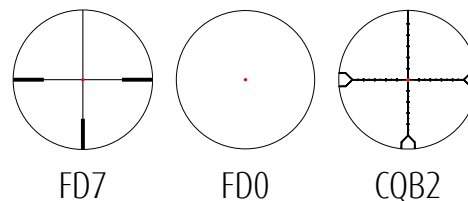

EXOS TMR



FEATURES

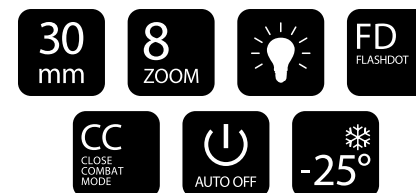

OPTIONS



1-8x24 Exos TMR

EXOS TMR – perfect for CQC and 3-Gun


The Exos can also be equipped with our new tactical magnification ring (TMR). Due to the design of the throw lever, and the design of the tactical magnification ring (TMR), the operator can select the optimal location to install the throw lever where it best suits their intended application and needs. In combination with our CQB2 reticle and the BDC II turret the Exos TMR is perfect for CQC & 3-Gun.



POSICON TURRET ADJUSTMENTS



LOCKABLE ELEVATION BDC TURRET (BDC II)



VERSION WITH LMZ-RAIL

INTENDED APPLICATIONS



SHORT-RANGE



MID-RANGE



LE & TACTICAL




3-GUN & IPSC

For more detailed turret information, please see page 18.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.



RETICLE OPTIONS - FIRST FOCAL PLANE



P3

10x42 PM II

The ideal scope for open country and long shots. Also well suited for target shooting, as its high magnification allows identification of shots on target without the necessity of a spotting scope. A good choice for flat-shooting rifles in small and medium calibers.

FEATURES

30
mmST
SINGLE TURN


INTENDED APPLICATIONS




MID-RANGE



LE & TACTICAL



TARGET SHOOTING



A

Single Turn (ST) elevation and windage on the PM II sights, with a Sub-Zero Click (SZC)

For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.







UNITED STATES MARINE CORPS




RETICLE OPTIONS - FIRST FOCAL PLANE



P3



P3L



P4FL

3-12x50 PM II

FEATURES



OPTIONS



The 3-12x50 PM II is probably the most proven and tested scope worldwide and is in use by most military units around the globe. With its brilliant optical performance and proven mechanics this scope is very versatile, permitting to realize distances of up to 1500 m.

INTENDED APPLICATIONS



SHORT-RANGE



MID-RANGE




A

Single Turn (ST) elevation and windage on the PM II sights, with a Sub-Zero Click (SZC)



B


Double Turn (DT) elevation adjustment with visual rotational indicator, with a Sub-Zero Click (SZC)




LE & TACTICAL

For more detailed turret information, please see pages 38 and 39.


Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

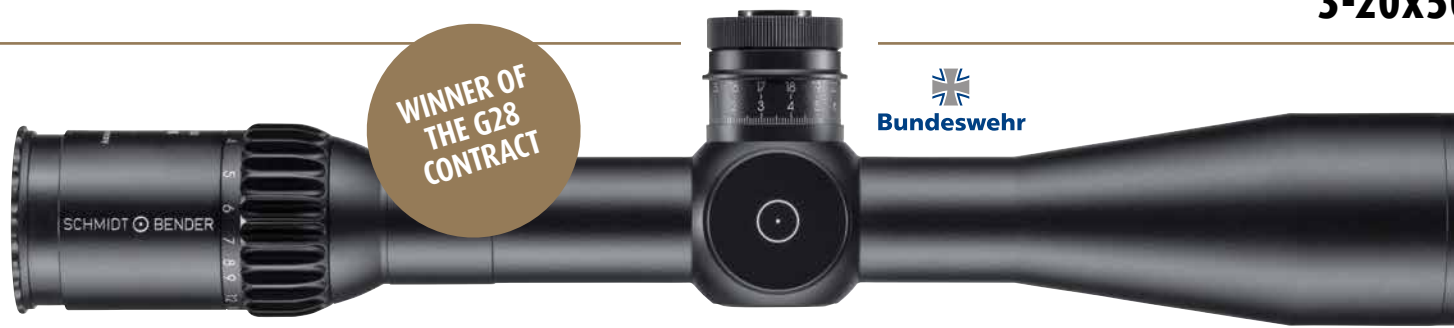

RETICLE OPTIONS - SECOND FOCAL PLANE




RETICLE OPTIONS - FIRST FOCAL PLANE

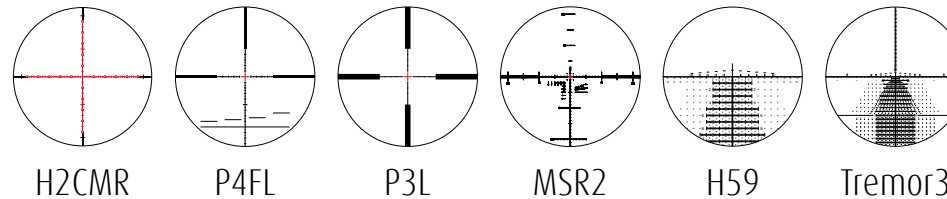

FEATURES




OPTIONS



3-20x50 PM II

3-20x50 PM II is in use by the German Army and other military units around the globe. The variable magnification from 3 to 20x permits the scope to be used universally on a multitude of rifles with many different calibers. Due to its rather comprehensive total adjusting range of 26 MIL/64 MOA the scope may even be used at very large distances.

INTENDED APPLICATIONS

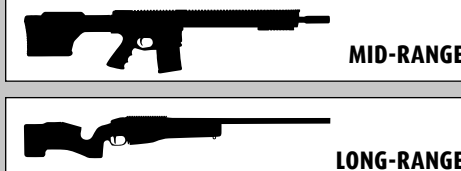

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Lockable Turret (LT), with a Sub-Zero Click (SZC)



Single Turn with Zero Click (ZC) and locking function


For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.






RETICLE OPTIONS - SECOND FOCAL PLANE



P3L

P4FL

RETICLE OPTIONS - FIRST FOCAL PLANE

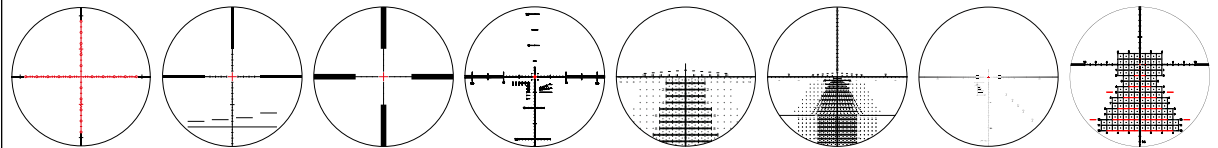

H2CMR

P4FL

P3L

MSR2

H59

Tremor3

LRR-MIL

GR²ID



FEATURES

34 mm

5 ZOOM

P PARALLAX



-25°

DT DOUBLE TURN

OPTIONS

RAL COLOR YOUR SCOPE

MTC MORE TACTILE CLICKS

ST SINGLE TURN

LT LOCKING TURRETS

ZC SUB ZERO CLICK

-46°

25m WATERPROOF

5-25x56 PM II

The 5-25x56 PM II model is setting the benchmark for the industry in terms of optical quality and mechanical reliability. Due to its great magnification range and well-engineered performance it is very popular among military/police units as well as competition shooters which are demanding the best of the best. That is why Schmidt & Bender has been supplying the Special Forces of Army, Navy, Air Force and Marines with the Schmidt & Bender 5-25x56 PMII PSR scope since 2011.

INTENDED APPLICATIONS



LONG-RANGE



ULTRA LONG-RANGE



B



C




A



I



LE & TACTICAL




TARGET SHOOTING

For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - SECOND FOCAL PLANE



SPORTF

P4F

RETICLE OPTIONS - FIRST FOCAL PLANE



P4F

12-50x56 PM II

The 12-50x56 PM II is the ideal scope for making shots at larger distances. The tried and true parallax compensation already used successfully in many other Schmidt & Bender scopes permits the user to focus on targets at a distance between 10 m and infinity.

FEATURES

34
mm4
ZOOMP
PARALLAX
↔

-25°


OPTIONS

DT
DOUBLE TURNMT
MULTITURN

INTENDED APPLICATIONS



LONG-RANGE

ULTRA
LONG-RANGE

TARGET SHOOTING



H

Multi-Turn (MT) elevation
turret with a Sub-Zero Click
(SZC)



B

Double Turn (DT) elevation or
windage adjustment with
visual rotational indicator,
with a Sub-Zero Click (SZC)

For more detailed turret information, please see pages 38 and 39.


Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.






US SOCOM


RETICLE OPTIONS - FIRST FOCAL PLANE




H2CMR




P4FL



H59



Tremor3



LRR-MIL

3-27x56 PM II HIGH POWER

FEATURES

34
mm

9
ZOOM

P
PARALLAX



-25°

DT
DOUBLE TURN

LT
LOCKING
TURRETS

ZC
SUB ZERO CLICK

OPTIONS

MTC
MORE
TACTILE
CLICKS

RAL
COLOR YOUR
SCOPE

-46°

25m
WATERPROOF

THROW LEVER
COMPATIBLE

The 3-27x56 PM II High Power was developed as part of a US SOCOM request for proposal for shooting at extremely distant targets. With its unique 9x zoom, at 27x magnification it can provide excellent resolution for even the smallest targets at a great distance thanks for its brilliant optics. The lower 3x magnification provides a field of view of 13 m/100 m and is thus well suited for observation.

INTENDED APPLICATIONS



LONG-RANGE



ULTRA
LONG-RANGE




Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Lockable Turret (LT), with a Sub-Zero Click (SZC)



Single Turn with Zero Click (ZC) and locking function



LE & TACTICAL




TARGET SHOOTING

For more detailed turret information, please see pages 38 and 39.


Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.




RETICLE OPTIONS - FIRST FOCAL PLANE




H2CMR



P4FL



Tremor3



LRR-MIL

5-45x56 PM II HIGH POWER

FEATURES

34
mm

9
ZOOM

P
PARALLAX



-25°

DT
DOUBLE TURN

LT
LOCKING
TURRETS

ZC
SUB ZERO CLICK

OPTIONS

MTC
MORE
TACTILE
CLICKS

RAL
COLOR YOUR
SCOPE

-46°

25m
WATERPROOF

The 5-45x56 PM II High Power is the latest addition to the High Power line. Apart from the unusual magnification range, the optic design has been improved allowing a wider field of view on 5x magnification. This is our giant among long range riflescopes.

INTENDED APPLICATIONS




LONG-RANGE



ULTRA
LONG-RANGE



LE & TACTICAL



TARGET SHOOTING



E

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)









J

Capped flat windage adjustment with a Zero Click (ZC)








For more detailed turret information, please see pages 38 and 39.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

PM II AND COMPETITION FIRST FOCAL PLANE (FFP) RETICLES








NON-ILLUMINATED




NON-ILLUMINATED

PM II AND COMPETITION SECOND FOCAL PLANE (SFP) RETICLES




NON-ILLUMINATED

NON-ILLUMINATED

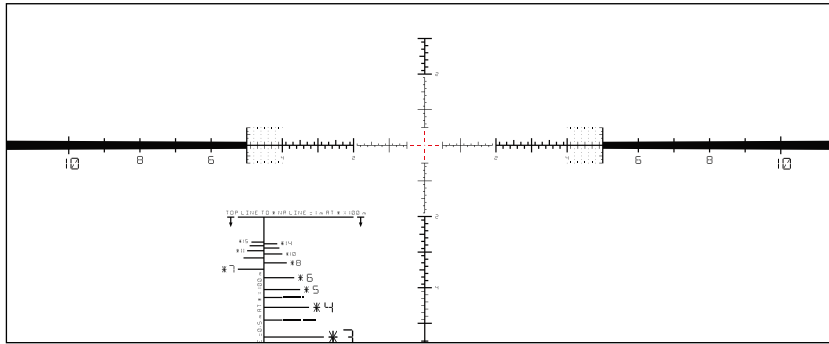


LRR-MIL

The Long Range Reticle - Milliradian (LRR-Mil) was specially developed for shooting at long distances. Because of this, with the design of this first level of the reticle we paid particular attention to achieving the smallest metric coverage, using a new illumination technology. The sniper has an ultra-fine daylight central red dot at his disposal. This has a cover of about 1.6 cm at a distance of 1 km. The integrated 0.1 mrad marks measuring up to 5 mrad from the center makes the exact measurement of target sizes and exact shot corrections possible. The range estimate indicator in the lower left quadrant enables fast distance measurement for objects of 1 m height and 0.5 m width. Magnification indicators are available in the lower right quadrant.

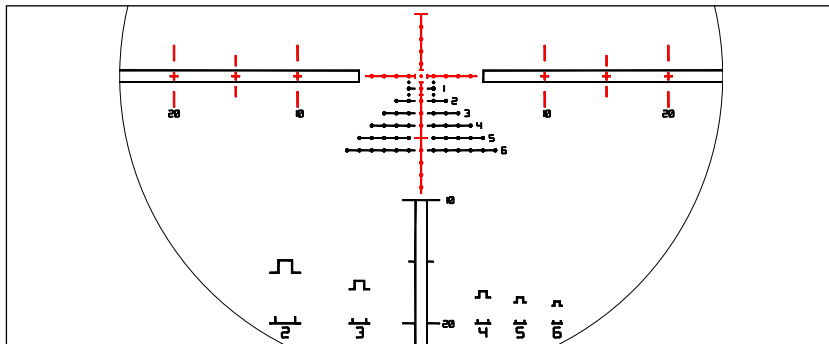

MDR-T6

The Mil Dot Reticle - Tactical 6 (MDR-T6) is a Mil Dot-based reticle, which will be available initially in the 1-8x24 PM II ShortDot Dual CC. For elevation and windage correction, markings are located below the center for quick corrective action. Thus, depending on the caliber, shot deviation of over 500 m and windage of more than 8 m/s can be compensated. The reticle also has markers for estimating object speeds, as well as versatile range estimate indicators for different distances.

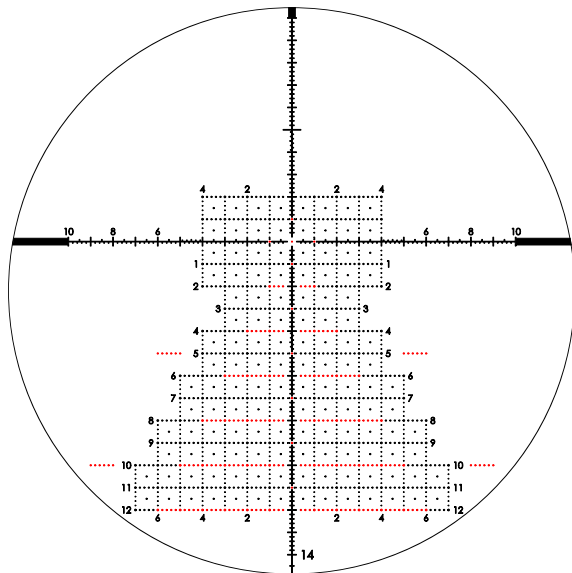

GR²ID

The GR²ID reticle has been designed in collaboration with international Precision Rifle Competitors, where focus has been on providing as much information to the competitor as possible, while reducing perceived clutter to a minimum.

The GR²ID reticle features 4 distinct areas of design; the Base Reticle, the Ballistic Grid, the Hold Over/Under Grid and the Illumination Tree.

The Hold Over/Under Grid is a new addition to reticle design. This came about from a need of Practical Precision Rifle Competitors wanting to dial out the elevation and windage of a mid ranged target in order to then use the reticle to either hold over or under in engaging multiple targets in a stage.

Less to dial, Less to remember = Faster stage times.



ADJUSTMENT TURRETS FOR ELEVATION AND WINDAGE

The riflescopes in the PM II product line are offered with various versions of elevation and windage adjustment turrets. There are many types of adjustment configurations available. Our most popular adjustments are offered in the catalogue; others are available, via special order, on our website. We offer several options to include Single Turn or Double Turn, lockable or non-lockable, with either tactile or visible rotational indicators, more tactile clicks and with Zero Click and Sub-Zero Click functions. Distinctions are further made in terms of the units of measure for the adjustments; we offer centimeter/milliradian or MOA values. The turret's direction of rotation can be counterclockwise, or clockwise. Special order configurations can incorporate extended lead times. Please note the catalogued list of options regarding the types of turrets that we offer:



ELEVATION



WINDAGE

A

Single Turn (ST) elevation and windage on the PM II sights, with a Sub-Zero Click (SZC)

This is the basic version for the military PM II models. The individual clicks are clearly tactile when turned and can be set precisely and individually.



ELEVATION



WINDAGE

B

Double Turn (DT) elevation or windage adjustment with visual rotational indicator, with a Sub-Zero Click (SZC)

This is one of our most popular and sought-after turret designs. It provides a visible rotational indicator and has two rotational settings. The indicator changes color during the transition to the second rotation from black to yellow, which corresponds to the yellow font on the turret. It is ideally capable of providing the adjustment travel needed for long-range shots.



C

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Lockable Turret (LT), with a Sub-Zero Click (SZC)

This represents a highly sophisticated and lockable tactical turret design. It has a tactile rotational indicator that appears on the top of the turret during the transition to the second rotation. In addition, at every 10th click, the tactile response is more pronounced, making fast adjustment possible without having to look at the turret. (MTC optional). The locking action is triggered by pulling up the outer ring of the turret, and it is set by pressing it down again. A red symbol indicates the locked position.



D

Single Turn (ST) elevation and windage adjustment with optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)

This recent development of a lockable Single Turn turret is discernably flat and features an incredible 170 clicks with a more pronounced click at every 10th click (MTC optional). The locking action is triggered by pulling up the outer ring of the turret, and it is set by pressing it down again. A red symbol indicates the locked condition. Furthermore, it incorporates a Zero Click. This represents an incredibly low-profile adjustment option for the 5-20x50 PM II Ultra Short model.



E

Double Turn (DT) elevation adjustment with tactile rotational indicator and optional More Tactile Clicks (MTC) function, Ultra flat Lockable Turret (LT), with a Zero Click (ZC)
This represents a substantial recent development in a lockable double-turn turret. It incorporates an exceptionally low-profile design, and it features an incredible 350 cm click value (35 Mils total travel) with a more pronounced click at every 10th click (MTC optional). The second turn is indicated by a gold-colored pin, which is both visible and tactile, that appears out of the top of the turret. The locking action is triggered by pulling up the outer ring of the turret, and it is set by pressing it down again. A red symbol indicates the locked condition. Furthermore, it incorporates a Zero Click. This turret represents the ultimate in compact design.



ELEVATION

Ultra flat Single Turn with optional MTC and locking for ShortDot

This is a flat version of a Single Turn with MTC for ShortDot riflescopes (MTC optional). The locking mechanism is released by pulling up the outer ring, and fixed into place by pressing down again. In this state the word 'Locked' in red lettering is visible. The flat construction allows a clear view of the target with both eyes open.



WINDAGE

F

Ultra flat Single Turn with a Zero Click (ZC) and locking for ShortDot

This is the flat version of a Single Turn with ZC for ShortDot riflescopes. The locking mechanism is released by pulling up the outer ring, and fixed into place by pressing down again. In this state the word 'Locked' in red lettering is visible. The flat construction allows a clear view of the target with both eyes.



G

Single Turn (ST) elevation and windage turret, with Locking Turret, with a Sub-Zero Click (SZC)

This straightforward and highly effective elevation and windage adjustment is for specific PM II models. The individual clicks are clearly tactile when turned and can be set precisely and individually. It also incorporates a Locking Turret design. The locking feature and turret are operated by pulling up on the perimeter of the turret, adjusting to your chosen setting, and pushing it down into place to lock it again.



H

Multi-Turn (MT) elevation turret with a Sub-Zero Click (SZC)

This is an exceptionally clever elevation turret design which represents an easy-to-read and reference rotational indicator setting. It allows the operator to keep track of the elevation's revolution count via a window at the top perimeter of the turret. Behind each window, the revolution count is displayed in numerical fashion from 1 to 5.



I

Single Turn with Zero Click (ZC) and locking function

This turret has a more noticeable click on the zero, allowing a quick return to the starting position. The locking mechanism is released by pulling out the outer ring, and fixed into position by pressing it back in. In this state the word 'Locked' in red lettering is visible.



J

Capped flat windage adjustment with a Zero Click (ZC)

This special turret is intended primarily for use with a tactical reticle. With this, after the riflescope has been zeroed, there is no further windage adjustment required. The turret can then be protected from accidental adjustments by installation of the cap.



NEW TURRET GENERATION II

The new turret generation II is the further development of our previous standard turrets. They all have a lever with which you can choose between different functional modes. For the elevation turrets there are three modes to choose from. In the starting position of the lever, the turret is locked against unintentional adjustment. This is represented by the color red in a window next to the index marking. In the second mode, MTC is ready for use and the turret can be adjusted as usual. Here green is displayed in the viewing window. The third mode enables the deactivation of the MTC, which is indicated by black in the viewing window. The windage turret can be switched between lock mode and the Zero Click adjustment mode. It also has a viewing window – the current state being signified by the colors red and green. For elevation correction we have the Single Turn II, the Double Turn II with a visual indicator, the Double Turn II+ with a tactile revolution indicator and the Multi Turn II – which possesses both of these. For windage correction we have in our selection the Single Turn II, Double Turn II and Double Turn II+ to choose from. Depending on the tower, adjustment ranges of 0.1 or 0.05 mrad or 1/4 or 1/8 MOA can be selected.



Single Turn II with MTC or ZC and lock

In addition to the precise and clearly noticeable clicks, the basic version offers a fast and clearly recognizable engraving. This turret offers the advantages of the new square shape and is equipped with the Mode Lever. Note: The 3-21x50 Exos Single Turn II Locking is without MTC.



Double Turn II with visual revolution indicator, MTC or ZC and lock

This turret has two turns and thus provides sufficient adjustment for shots at long distances. The transition to the second revolution is indicated in the window of the revolution indicator through a change from black to yellow. This turret also offers the advantages of the new square shape and is equipped with the Mode Lever.



Double Turn II+ with tactile turn indicator, MTC or ZC and lock

This is a flatter version with a tactile turn indicator that can be seen and felt as you transition through to the second turn on the turret. The flat design allows for the attachment of a red dot sight on the scope mount without obscuring the view through the turret. This turret has the advantages of the new square shape and is equipped with the Mode Lever.




Multi Turn II with tactile and visible revolution indicator, MTC and locking

This version has five turns. This provides a fine and precise adjustment of 0.05 mrad or 1/8 MOA per click, providing a wide adjustment range. In order to be able to recognize the exact rotational position, the turret is equipped with visual and tactile indicators. This turret also has the advantages of the new square shape and is equipped with the Mode Lever.




RETICLE OPTIONS - SECOND FOCAL PLANE



Sport FT2L Sport FT3L

RETICLE OPTIONS - FIRST FOCAL PLANE



Sport FT1L



FEATURES

OPTIONS



12.5-50x56 FIELD TARGET II


In close collaboration with sports marksmen, Schmidt & Bender has developed the 12.5-50x56 Field Target II riflescope specifically for precision competition and marksmanship applications.

The Field Target II model represents an enhanced version of the original Field Target model. The well-proven, zero-backlash parallax compensation of our tactical riflescopes enables us to achieve superlative levels of measuring precision between 9 m and 70 m. Ambient heating of the scope, caused by sunlight, is minimized by the optional, aesthetically pleasing silver-colored and satin-finished surface. The Field Target II has been developed with a level of stability and precision never before achieved for sports marksmen. We offer several specific Field Target reticles, available in both first and second focal plane designs. The riflescope includes advanced turret adjustment features, a liquid level, an indicator for the parallax setting, and a magnetic clip-on sidewheel. The parallax compensation is engraved from 9 meters to infinity, making the scope also suitable for other competitive marksmanship disciplines. It is the perfect asset for sports marksmen and championship competitors.

INTENDED APPLICATIONS



FIELD TARGET



TARGET SHOOTING





Killflash honeycomb filter

The honeycomb filters available for different sizes of objective lens minimize reflections from the objective lens frontline, preventing the marksman from being detected.

- Killflash honeycomb filter 24 mm (Black/RAL 8000)
- Killflash honeycomb filter 50 mm (Black/RAL 8000)
- Killflash honeycomb filter 56 mm (Black/RAL 8000)



Yellow filter

Our yellow filters are made from high-quality glass and can be screwed into place in front of the objective lens if required.

- Yellow filter 50 mm
- Yellow filter 56 mm



Polarization filter

The polarization filter can be attached to the ocular of the scope, making it possible to see through panes of glass.



Polarization filter

This new kind of polarization filter can be screwed easily into the ocular, making it possible to see through panes of glass.

- Available for the especially adapted models High Power, ShortDot, Ultrashort and 3-20x50 PM II.



Laser filter

Our laser filter is available for 532 nm (green) or 1064 nm (infrared) wavelength and can be screwed into place in front of the objective lens. The laser filter protects the shooter's eye from getting hurt by laser radiation.

- Laser filter 50 mm (Black/RAL 8000)
- Laser filter 56 mm (Black/RAL 8000)



Lens cover

These objective lens protective covers were developed specifically for the discerning marksman. They can be folded up against the tube body, and engage easily in this position. The ease of rotation of the protective cover is also assured by means of some precision detents, meaning that it can always be moved into a position in which it does not obstruct the marksman when at work.

- Lens cover 24 mm (Black/RAL 8000)
- Lens cover 24 mm (Black/RAL 8000) with mounting ring
- Lens cover 42 mm (Black)
- Lens cover 42 mm (Black) with mounting ring
- Lens cover 50 mm (Black/RAL 8000)
- Lens cover 50 mm (Black/RAL 8000) with mounting ring
- Lens cover 56 mm (Black/RAL 8000)
- Lens cover 56 mm (Black/RAL 8000) with mounting ring



Ocular cover

The protective covers for scopes can be fitted to the head of the scope and lock into this position. Without adjusting the scope, these are easy to turn and can always be positioned outside the field of view.

- Ocular cover 50 mm (Black/RAL 8000)
- Ocular cover 50 mm (Black/RAL 8000) with 43 mm mounting ring
- Ocular cover 50 mm (Black/RAL 8000) with 45 mm mounting ring



Sun shade

Sun shades are available for various objective lens diameters and in various colors, and prevent light from entering the lens at an angle and adversely affecting reflexes.

- Sun shade objective 42 mm/50 mm long
- Sun shade objective 50 mm/50 mm long
- Sun shade objective 56 mm/50 mm long
- Sun shade objective 56 mm/100 mm long



Grey filter

Our grey filters are made from high-quality glass and can be screwed into place in front of the objective lens if required.

- Grey filter 50 mm
- Grey filter 56 mm



Patches

The new Schmidt & Bender Patches can be mounted on clothes, bags and tactical equipment. This high quality patch with Velcro backing is made out of durable soft rubber PVC material. It is available in grey or tan color.



Butler Creek

The Butler Creek protective covers are the simplest form of protection for the lens elements on the scope and lens against soiling while in transit. They simply snap into place on whichever scope you care to use.

- Butler Creek ocular (43 mm/48 mm)
- Butler Creek objective (50 mm/56 mm)

Cleaning Kit

The Schmidt & Bender cleaning kit enables you to clean and care for your scope properly.



Field Target

The Field Target accessories can be purchased separately as individual items. This range was specifically designed for the challenging application of Field Target shooting.

- Sidewheel 5.12 inch Field Target (Black/Silver)
- Lightprotection ocular, 3.54 inch long



Tactical Bag **NEW**

The new Tactical Bag protects your Schmidt & Bender rifle scope and allows the comfortable transport of your weapon system. A target detection is even possible with an attached bag, due to the removable lids. The mesh pocket inside offers storage space for accessories. Suitable for all Schmidt & Bender models and available in black and coyote.

- Tactical Bag coyote
- Tactical Bag black

HUNTING

| S | M | L |
|-------------------|---------------------|-------------------|
| 1.1-5x24 Stratos | 2.5-10x50 Polar T96 | 4-16x56 Polar T96 |
| 1.5-8x42 Stratos | 3-12x54 Polar T96 | 2.5-10x56 Klassik |
| 1.1-4x24 Zenith | 2.5-13x56 Stratos | 4-16x50 Klassik |
| 1.5-6x42 Zenith | 2.5-10x56 Zenith | 8x56 Klassik |
| 1-8x24 Exos | 3-12x50 Zenith | |
| 1.25-4x20 Klassik | 3-12x50 Klassik | |
| | 3-12x42 Klassik | |
| | 6x42 Klassik | |
| | 10x42 Klassik | |

POLICE & MILITARY

| S | M | L |
|---------------------------|----------------------------|----------------------------|
| 1.1-8x24 PM II High Power | 3-20x50 PM II Ultra Short | 3-20x50 PM II |
| 1-8x24 PM II ShortDot | 5-20x50 PM II Ultra Short | 5-25x56 PM II |
| 1.5-8x26 PM II ShortDot | 3-12x50 PM II | 12-50x56 PM II |
| | 3-12x56 PM II Ultra Bright | 4-16x56 PM II Ultra Bright |
| | 10x42 PM II | 3-27x56 PM II High Power |
| | | 5-45x56 PM II High Power |

COMPETITION

| S | M | L |
|---|---|----------------------------|
| | | 12.5-50x56 Field Target II |



| | ITEM NUMBER | FOCAL PLANE | RETICLE | MAIN TUBE-Ø (MM) | ILLUMINATION | PARALLAX | CLICK VALUE | ELEVATION ADJ. | WINDAGE ADJ. | FINISH |
|---------------------|----------------------|-------------|---------|------------------|-------------------------|-----------|-------------|-----------------------|-----------------------|--------|
| 2,5-10x56 Klassik | 642-811-732-03-03A02 | 1. FP | L7F | 30 | Illuminated | 100 m fix | 1 cm | Capped - Classic | Capped - Classic | Black |
| 4-16x50 Klassik | 847-811-702-08-08A02 | 1. FP | A7 | 30 | Non-Illuminated | 50 m-∞ | 0.5 cm | Capped - Classic | Capped - Classic | Black |
| | 847-811-862-08-08A02 | 1. FP | P3 | 30 | Non-Illuminated | 50 m-∞ | 0.5 cm | Capped - Classic | Capped - Classic | Black |
| with BDC | 847-811-702-30-08A02 | 1. FP | A7 | 30 | Non-Illuminated | 50 m-∞ | 0.5 cm | Classic BDC | Capped - Classic | Black |
| | 847-811-862-30-08A02 | 1. FP | P3 | 30 | Non-Illuminated | 50 m-∞ | 0.5 cm | Classic BDC | Capped - Classic | Black |
| 1.1-4x24 Zenith | 776-811-708 | 2. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1.5 cm | Capped - Posicon | Capped - Posicon | Black |
| | 776-811-008 | 2. FP | FD0 | 30 | FlashDot Illuminated | 100 m fix | 1.5 cm | Capped - Posicon | Capped - Posicon | Black |
| 2,5-10x56 Zenith | 772-811-707 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 672-811-707-30-03 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Classic BDC | Capped - Posicon | Black |
| 3-12x50 Zenith | 774-811-707 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 674-811-707-30-05 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Classic BDC | Capped - Posicon | Black |
| 1.5-8x42 Stratos | 750-811-707 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 750-811-707-E4-03 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| 2.5-13x56 Stratos | 751-811-707 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 751-811-707-E4-03 | 1. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| 1-8x24 Exos | 780-811-708 | 2. FP | FD7 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| 1-8x24 Exos TMR | 780-811-918-E4-03B24 | 2. FP | CQB2 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| 3-21x50 Exos | 757-911-750-L2-E9 | 2. FP | D7 | 34 | diffraction illuminated | 25 m-∞ | 1 cm | Single Turn - Locking | Single Turn - Locking | Black |
| 2.5-10x50 Polar T96 | 753-911-712 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 753-911-720 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 753-911-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 753-911-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| with rail | 753-K11-712 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 753-K11-720 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC and rail | 753-K11-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 753-K11-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| 3-12x54 Polar T96 | 756-911-712 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 756-911-720 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 756-911-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 756-911-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| with rail | 756-911-972-E4-03 | 1. FP | P4FL | 34 | Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 756-K11-712 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC and rail | 756-K11-720 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 756-K11-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 756-K11-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 100 m fix | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| 4-16x56 Polar T96 | 755-911-712 | 1. FP | L7 | 34 | Illuminated | 30 m-∞ | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 755-911-720 | 2. FP | D7 | 34 | diffraction illuminated | 30 m-∞ | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC | 755-911-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 30 m-∞ | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 755-911-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 30 m-∞ | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| with rail | 755-911-972-E4-03 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 755-K11-712 | 1. FP | L7 | 34 | Illuminated | 30 m-∞ | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| with BDC and rail | 755-K11-720 | 2. FP | D7 | 34 | diffraction illuminated | 30 m-∞ | 1 cm | Capped - Posicon | Capped - Posicon | Black |
| | 755-K11-712-E4-03 | 1. FP | L7 | 34 | Illuminated | 30 m-∞ | 1 cm | BDC II - Locking | Capped - Posicon | Black |
| | 755-K11-720-E4-03 | 2. FP | D7 | 34 | diffraction illuminated | 30 m-∞ | 1 cm | BDC II - Locking | Capped - Posicon | Black |

PM II MODELS – PART NUMBERS AND DESCRIPTIONS*

PART NUMBERS

10x42 PM II
1-8x24 Exos TMR
1-8x24 PM II ShortDot CC

1-8x24 PM II ShortDot Dual CC

3-20x50 PM II Ultra Short

5-20x50 PM II Ultra Short

| ITEM NUMBER | FOCAL PLANE | RETICLE | MAIN TUBE-Ø (MM) | ILLUMINATION | PARALLAX | CLICK VALUE | ELEVATION ADJ. | WINDAGE ADJ. | FINISH |
|----------------------|-------------|----------|------------------|-------------------------|-----------|-------------|--|----------------------------------|----------|
| 836-811-862-73-94 | 1. FP | P3 | 30 | Non-Illuminated | 100 m fix | 1 cm | Single Turn | Single Turn | Black |
| 780-811-918-E4-03B24 | 2. FP | CQB2 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | BDC II H - Locking | BDC II H - Locking | Black |
| 682-811-918-B7-B3 | 2. FP | CQB2 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | Black |
| 682-845-918-B7-B3 | 2. FP | CQB2 | 30 | FlashDot Illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | RAL 8000 |
| 683-811-43E-K1-H1 | 1./2. FP | MDR-T6 | 30 | diffraction illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | Black |
| 683-811-44E-K1-H1 | 1./2. FP | MDR | 30 | diffraction illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | Black |
| 683-845-43E-K1-H1 | 1./2. FP | MDR-T6 | 30 | diffraction illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | RAL 8000 |
| 683-845-44E-K1-H1 | 1./2. FP | MDR | 30 | diffraction illuminated | 100 m fix | 1 cm | Single Turn - Locking | Single Turn - Locking | RAL 8000 |
| 667-911-532-F2-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-592-F2-E9 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-822-F2-E9 | 1. FP | MSR2 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-872-F2-E9 | 1. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-942-F2-E9 | 1. FP | H2CMR | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-972-F2-E9 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-975-F2-E9 | 2. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-911-875-F2-E9 | 2. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 667-945-532-F2-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-592-F2-E9 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-822-F2-E9 | 1. FP | MSR2 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-872-F2-E9 | 1. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-942-F2-E9 | 1. FP | H2CMR | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-972-F2-E9 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-975-F2-E9 | 2. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 667-945-875-F2-E9 | 2. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 673-911-692-F2-E9 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 673-911-972-F2-E9 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 673-911-542-F2-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 673-945-692-F2-E9 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 673-945-972-F2-E9 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 673-945-542-F2-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |

FP - Focal plane

*All models shown here have turrets turning clockwise (cw). Counterclockwise (ccw) turrets can also be ordered.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

3-12x54 PM II Ultra Bright

| ITEM NUMBER | FOCAL PLANE | RETICLE | MAIN TUBE-Ø (MM) | ILLUMINATION | PARALLAX | CLICK VALUE | ELEVATION ADJ. | WINDAGE ADJ. | FINISH |
|----------------------------|-------------|--------------------|------------------|--------------|----------|-------------|--|-----------------------------------|----------|
| 670-911-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 670-911-882-G9-E9 | 1. FP | P3L | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 670-911-532-G9-E9 | 1. FP | Tremor3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 670-945-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 670-945-882-G9-E9 | 1. FP | P3L | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 670-945-532-G9-E9 | 1. FP | Tremor3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 4-16x56 PM II Ultra Bright | | | | | | | | | |
| 671-911-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 671-911-882-G9-E9 | 1. FP | P3L | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 671-911-532-G9-E9 | 1. FP | Tremor3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 671-945-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 671-945-882-G9-E9 | 1. FP | P3L | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 671-945-532-G9-E9 | 1. FP | Tremor3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 3-12x50 PM II | | | | | | | | | |
| 644-911-882-73-94A20 | 1. FP | P3L | 34 | Illuminated | 50 m-∞ | 1 cm | Single Turn | Single Turn | Black |
| 644-911-972-73-94A20 | 1. FP | GenII | 34 | Illuminated | 50 m-∞ | 1 cm | Single Turn | Single Turn | Black |
| 644-911-962-73-94A20 | 1. FP | P4FL | 34 | Illuminated | 50 m-∞ | 1 cm | Single Turn | Single Turn | Black |
| 644-911-882-96-94A38 | 1. FP | P3L | 34 | Illuminated | 50 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 644-911-962-92-94A38 | 1. FP | P4FL | 34 | Illuminated | 50 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 644-911-972-92-94A38 | 1. FP | GenII | 34 | Illuminated | 50 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 3-20x50 PM II | | | | | | | | | |
| 668-911-532-B8-B4 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-592-B8-B4 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-822-B8-B4 | 1. FP | MSR2 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-872-B8-B4 | 1. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-942-B8-B4 | 1. FP | H2CMR | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-972-B8-B4 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-975-B8-B4 | 2. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-911-875-B8-B4 | 2. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 668-945-532-B8-B4 | 1. FP | TreMoR 3 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-592-B8-B4 | 1. FP | H59 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-822-B8-B4 | 1. FP | MSR2 | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-872-B8-B4 | 1. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-942-B8-B4 | 1. FP | H2CMR | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-972-B8-B4 | 1. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-975-B8-B4 | 2. FP | P4FL | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 668-945-875-B8-B4 | 2. FP | P3L | 34 | Illuminated | 25 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 5-25x56 PM II | | | | | | | | | |
| 677-911-552-94-67 | 1. FP | TreMoR 3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-592-94-67 | 1. FP | H59 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-812-94-67 | 1. FP | MSR2 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-882-94-67 | 1. FP | P3L | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-922-94-67 | 1. FP | H2CMR | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-972-94-67 | 1. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-885-94-67 | 2. FP | P3L | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-41C-94-67 | 1. FP | LRR-MIL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-422-94-67B03 | 1. FP | GR ² ID | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn | Single Turn | Black |
| 677-911-422-B8-B4B03 | 1. FP | GR ² ID | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |

FP - Focal plane

PM II AND COMPETITION MODELS – PART NUMBERS AND DESCRIPTIONS*

PART NUMBERS

5-25x56 PM II

| ITEM NUMBER | FOCAL PLANE | RETICLE | MAIN TUBE-Ø (MM) | ILLUMINATION | PARALLAX | CLICK VALUE | ELEVATION ADJ. | WINDAGE ADJ. | FINISH |
|----------------------|-------------|--------------------|------------------|-----------------|----------|-------------|--|-----------------------------------|----------|
| 677-911-552-B8-B4 | 1. FP | TreMoR 3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-592-B8-B4 | 1. FP | H59 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-812-B8-B4 | 1. FP | MSR2 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-882-B8-B4 | 1. FP | P3L | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-922-B8-B4 | 1. FP | H2CMR | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-972-B8-B4 | 1. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-885-B8-B4 | 2. FP | P3L | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-985-B8-B4 | 2. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-911-41C-B8-B4 | 1. FP | LRR-MIL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 677-945-552-B8-B4 | 1. FP | TreMoR 3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-592-B8-B4 | 1. FP | H59 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-812-B8-B4 | 1. FP | MSR2 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-882-B8-B4 | 1. FP | P3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-922-B8-B4 | 1. FP | H2CMR | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-972-B8-B4 | 1. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-885-B8-B4 | 2. FP | P3L | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-985-B8-B4 | 2. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-422-B8-B4B03 | 1. FP | GR ² ID | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 677-945-41C-B8-B4 | 1. FP | LRR-MIL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 878-911-855-A6-62 | 2. FP | Sport Fine | 34 | Non-Illuminated | 10 m-∞ | 1/4 cm | Multi Turn | Single Turn | Black |
| 878-911-975-A6-62 | 2. FP | P4F | 34 | Non-Illuminated | 10 m-∞ | 1/4 cm | Multi Turn | Single Turn | Black |
| 878-911-972-A6-62 | 1. FP | P4F | 34 | Non-Illuminated | 10 m-∞ | 1/4 cm | Multi Turn | Single Turn | Black |
| 669-911-532-D1-B4 | 1. FP | Tremor3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 669-911-592-D1-B4 | 1. FP | H59 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 669-911-942-D1-B4 | 1. FP | H2CMR | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 669-911-972-D1-B4 | 1. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 669-911-41C-D1-B4 | 1. FP | LRR-MIL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | Black |
| 669-945-532-D1-B4 | 1. FP | Tremor3 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 669-945-592-D1-B4 | 1. FP | H59 | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 669-945-942-D1-B4 | 1. FP | H2CMR | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 669-945-972-D1-B4 | 1. FP | P4FL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 669-945-41C-D1-B4 | 1. FP | LRR-MIL | 34 | Illuminated | 10 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Locking | RAL 8000 |
| 666-911-532-G9-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 666-911-942-G9-E9 | 1. FP | H2CMR | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 666-911-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 666-911-41C-G9-E9 | 1. FP | LRR-MIL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | Black |
| 666-945-532-G9-E9 | 1. FP | TreMoR 3 | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 666-945-942-G9-E9 | 1. FP | H2CMR | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 666-945-972-G9-E9 | 1. FP | P4FL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 666-945-41C-G9-E9 | 1. FP | LRR-MIL | 34 | Illuminated | 30 m-∞ | 1 cm | Double Turn, More Tactile Clicks - Locking | Single Turn - Zero Stop - Capped | RAL 8000 |
| 678-911-875-A7-A4 | 2. FP | FTDot | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Black |
| 678-911-872-A7-A4 | 1. FP | FT1 | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Black |
| 678-911-885-A7-A4 | 2. FP | FT3 | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Black |
| 678-923-875-A7-A4 | 2. FP | FTDot | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Silver |
| 678-923-872-A7-A4 | 1. FP | FT1 | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Silver |
| 678-923-885-A7-A4 | 2. FP | FT3 | 34 | Illuminated | 9 m-∞ | 1/8 MOA | Multi Turn | Double Turn | Silver |

FP - Focal plane

*All models shown here have turrets turning clockwise (cw). Counterclockwise (ccw) turrets can also be ordered.

Visit our website at www.schmidt-bender.com for the latest information and all possible custom order configurations regarding these products.

| |  4-16x50 Klassik |  2.5-10x56 Klassik |  1.1-4x24 Zenith |  3-12x50 Zenith |  2.5-10x56 Zenith |  1.5-8x42 Stratos |  2.5-13x56 Stratos |  1-8x24 Exos / TMR |  3-21x50 Exos |  2.5-10x50 Polar T96 |  3-12x54 Polar T96 |  4-16x56 Polar T96 |
|-----------------------------------|---|---|---|--|--|--|---|---|--|---|---|---|
| MAGNIFICATION | 4 - 16 | 2.5 - 10 | 1.1 - 4.0 | 3 - 12 | 2.5 - 10 | 1.5 - 8 | 2.5 - 13 | 1.0 - 8 | 3 - 21 | 2.5 - 10 | 3 - 12 | 4 - 16 |
| EXIT PUPIL (MM) | 12.5 - 3.1 | 14.0 - 5.6 | 14.1 - 5.9 | 14.1 - 4.2 | 14.1 - 5.6 | 12.0 - 5.3 | 12 - 4.3 | 9.6 - 3.0 | 11.4 - 2.4 | 12.0 - 5.0 | 12.0 - 4.5 | 12.0 - 3.5 |
| FIELD OF VIEW (M/100M) | 8.3 - 2.5 | 12.8 - 4.0 | 36.0 - 9.2 | 11.9 - 3.1 | 14.2 - 3.6 | 23.9 - 4.6 | 14.2 - 2.7 | 35.3 - 4.9 | 13.0 - 1.9 | 15.0 - 3.7 | 12.5 - 3.1 | 9.4 - 2.3 |
| LENGTH (MM) | 395 | 385 | 290 | 342 | 333 | 318 | 344 | 293 | 340 | 335 | 359 | 386 |
| WEIGHT (G) | 744 | 628 | 496 | 700 | 670 | 594 | 694 | 564 | 925 | 650 | 674 | 810 |
| MAIN TUBE-Ø (MM) | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 34 | 34 | 34 | 34 |
| PARALLAX ADJUSTMENT | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m | 100 m |
| FOCAL PLANE | 1. FP | 1. FP | 1. FP | 1. FP | 1. FP | 2. FP | 1. FP | 2. FP | 2. FP | 1. FP | 1. FP | 1. FP |
| ELEVATION ADJUSTMENT | 16 cm / 100 m | 32 cm / 100 m | --- | 32 cm / 100 m | 32 cm / 100 m | 100 cm / 100 m | 100 cm / 100 m | 100 cm / 100 m | 150 cm / 100 m | 100 cm / 100 m | 100 cm / 100 m | 100 cm / 100 m |
| WINDAGE ADJUSTMENT | --- | --- | --- | ±16 cm / 100 m | ±16 cm / 100 m | ±50 cm / 100 m | ±50 cm / 100 m | ±50 cm / 100 m | ±60 cm / 100 m | ±50 cm / 100 m | ±50 cm / 100 m | ±50 cm / 100 m |
| CLICK MECHANISM | 0.5 cm | 1 cm | 1.5 cm | 1 cm | 1 cm | 1 cm | 1 cm | 1 cm | 1 cm | 1 cm | 1 cm | 1 cm |
| TOTAL INTERNAL (ELEVATION TRAVEL) | --- | 145 cm | --- | 150 cm | --- | --- | 180 cm | 200 cm | 430 cm / 100 m 148 MOA / 100 m | 360 cm | 350 cm | 187 cm |
| TOTAL INTERNAL (WINDAGE TRAVEL) | --- | --- | --- | 150 cm | --- | --- | 180 cm | 200 cm | 210 cm / 100 m 74.5 MOA / 100 m | 360 cm | 350 cm | 140 cm |

FP - Focal plane

| | | | | | | | | | | | | | | | | | |
|---|--|---|--|--|--|--|---|--|--|--|---|---|---|--|--|--|--|
|  *1191 without accessories 12.5-50x56 Field Target II |  10x42 PM II |  1-8x24 PM II ShortDot CC |  1-8x24 PM II ShortDot Dual CC |  3-20x50 PM II Ultra Short |  5-20x50 PM II Ultra Short |  3-12x54 PM II Ultra Bright |  4-16x56 PM II Ultra Bright |  3-12x50 PM II |  3-20x50 PM II |  5-25x56 PM II |  12-50x56 PM II |  3-27x56 PM II High Power |  5-45x56 PM II High Power | | | | |
| 12.5 - 50 | 10 | 1.0 - 8.0 | 1.0 - 8.0 | 3.0 - 20 | 5.0 - 20 | 3.0 - 12 | 4.0 - 16 | 3.0 - 12 | 3.0 - 20 | 5.0 - 25 | 12.0 - 50.0 | 3.0 - 27 | 5.0 - 45 | | | | |
| 4.6 - 1.2 | 4.2 | 9.8 - 3 | 9.8 - 3 | 11.4 - 2.5 | 10 - 2.5 | 12 - 4.5 | 12 - 3.5 | 14.3 - 4.3 | 11.4 - 2.5 | 10.95 - 2.3 | 4.6 - 1.2 | 8.7 - 2.1 | 8.8 - 1.2 | | | | |
| 4.2 - 1.1 | 4 | 35.3 - 4.9 | 35.3 - 4.9 | 13.0 - 2.1 | 7.8 - 2.0 | 12.5 - 3.1 | 9.4 - 2.3 | 11.1 - 3.4 | 13.0 - 2.1 | 5.3 - 1.5 | 4.2 - 1.1 | 13.0 - 1.4 | 7.8 - 0.9 | | | | |
| 431 | 347 | 293 | 293 | 343 | 299 | 351 | 386 | 342 | 385 | 417 | 417 | 389 | 434 | | | | |
| 1304 with accessoires* | 476 | 631 | 625 | 903 | 866 | 922 | 958 | 710 | 956 | 1129 | 1110 | 1129 | 1106 | | | | |
| 34 | 30 | 30 | 30 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | 34 | | | | |
| 9 m - ∞ | 100 m fix | 100 m fix | 100 m fix | 25 m - ∞ | 25 m - ∞ | 30 m - ∞ | 30 m - ∞ | 50 m - ∞ or 100 m fix | 25 m - ∞ | 10 m - ∞ | 10 m - ∞ | 10 m - ∞ | 30 m - ∞ | | | | |
| 1. FP o. 2. FP | 1. FP | 2. FP | 1. FP & 2. FP | 1. FP o. 2. FP | 1. FP | 1. FP | 1. FP | 1. FP | 1. FP o. 2. FP | 1. FP o. 2. FP | 1. FP o. 2. FP | 1. FP | 1. FP | | | | |
| 269 cm / 100 m | 130 cm / 100 m | 102 cm / 100 m | 120 cm / 100 m | 350 cm / 100 m | 167 cm / 100 m | 272 cm / 100 m | 272 cm / 100 m | 130 cm / 100 m | 265cm / 100 m | 269 cm / 100 m | 173 cm / 100 m | 264 cm / 100 m | 272 cm / 100 m | | | | |
| 67 MOA | | | | 272 cm / 100 m | 350 cm / 100 m | | | 230 cm / 100 m | | 295 cm / 100 m | 67 MOA | 340 cm / 100 m | 295 cm / 100 m | | | | |
| 74 MOA | | | | 395 cm / 100 m | 272 cm / 100 m | | | | | | | | | | | | |
| ± 60 cm / 100 m | +60 cm / 100 m | +51 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | ± 60 cm / 100 m | 16 cm / 100 m | +60 cm / 100 m | +60 cm / 100 m | | | | |
| ± 16 MOA | | | | +65 cm / 100 m | +65 cm / 100 m | | | | | +65 cm / 100 m | 16 MOA | +65 cm / 100 m | +65 cm / 100 m | | | | |
| ± 14 MOA | | | | | | | | | | | 14 MOA | | | | | | |
| 1 cm / 1/4 cm / 1/4 MOA / 1/8 MOA | 1 cm | 1 cm | 1 cm | 0.5 cm or 1 cm | 0.5 cm or 1 cm | 1 cm | 1 cm | 1 cm | 1 cm | 0.5 cm or 1 cm | 1/4 cm / 1/4 MOA / 1/8 MOA | 0.5 cm or 1 cm | 0.5 cm or 1 cm | | | | |
| 308 cm | 324 cm | 200 cm | 230 cm | 378 cm | 400 cm | 275 cm | 330 cm | 270 cm | 380 cm | 308 cm | 346 cm | 388 cm | 305 cm | | | | |
| | | | | | | | | | | 344 cm | | 213 cm | 328 cm | | | | |
| 190 cm | 324 cm | 200 cm | 230 cm | 200 cm | 400 cm | 275 cm | 330 cm | 243 cm | 180 cm | 190 cm | 225 cm | 205 cm | 215 cm | | | | |
| | | | | | | | | | | 160 cm | | | 153 cm | | | | |

FP - Focal plane




4-16x56 Polar T96

With over 60 years of riflescope manufacturing experience, we at **Schmidt & Bender** have been able to research, design, and develop a myriad of ultra-high quality riflescope configurations. We are a global supplier for the most discriminating hunters, leading police forces, and elite military groups worldwide.



We have over 2,000 riflescope configuration options available to offer our global customers for hunting, competition, and tactical use. We offer many unique turret adjustments, first and second focal plane reticle designs, reticle illumination options, power zoom ranges, specialized features, and color options not listed in this catalogue.


If you are interested in a riflescope configuration not listed herein, please visit our website at www.schmidt-bender.com for a comprehensive list of our global product line offerings. Many of these items are available via custom order and by working through your Schmidt & Bender authorized stocking dealer. Please understand that custom orders are indeed custom, and they incorporate an extended delivery time. A nonrefundable deposit is required when placing a custom order. Please call your authorized stocking dealer or contact Schmidt & Bender directly at +49 (0) 6409 - 8115 - 0, and we can work with you regarding the pertinent details associated with this ordering option.

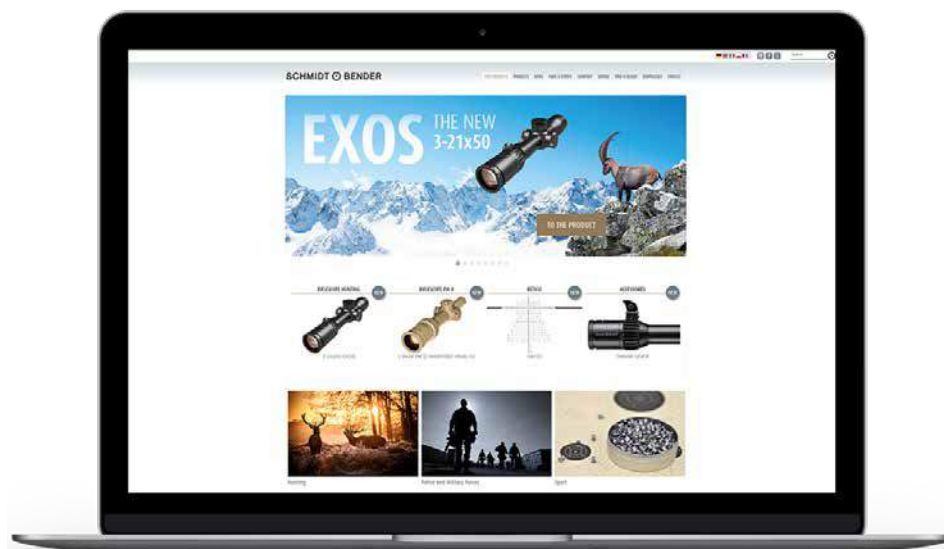Remember, at Schmidt & Bender, **Precision Makes The Difference!**




FIND US ON
FACEBOOK
AND INSTAGRAM


 /SCHMIDTANDBENDER
 @SCHMIDTANDBENDER




RETICLE




H2CMR




P4FL



MSR2



H59



Tremor3

FEATURES



OPTIONS



3-27x56 and 5-25x56 PM II DIGITAL

The new PM II Digital product line is being developed on the basis of stringent specifications in order to provide today's marksman with today's best riflescope and technology to yield the ultimate intelligent riflescope design.

It combines the capabilities of a traditional tactical riflescope with the modern abilities of digital technology: The information from compatible external devices – laser range finders, ballistics calculators, wind meters, or other hardware – will be displayed in the riflescope's field of view. This means that a marksman, lying prone behind the weapon, can retain a view of all information required for target acquisition and is therefore able to concentrate on the specific mission.

On this riflescope, it is possible, at present, to exchange data via a cable or via a Bluetooth interface. Apart from the modified ocular assembly, the scope remains unchanged in terms of its traditional functions – and the scope can continue to be used as before, as a legacy sight, even without external devices.





SCHMIDT BENDER

PRECISION MAKES THE DIFFERENCE!

Schmidt & Bender GmbH & Co. KG

Am Grossacker 42 | D - 35444 Biebertal, Germany
T: +49 (0) 6409 - 8115 - 0 | F: +49 (0) 6409 - 8115 - 11
info@schmidt-bender.de | www.schmidt-bender.com